
Electronic Circuit Breakers (ECB)


Precise, Compact ECBs for DC Circuits

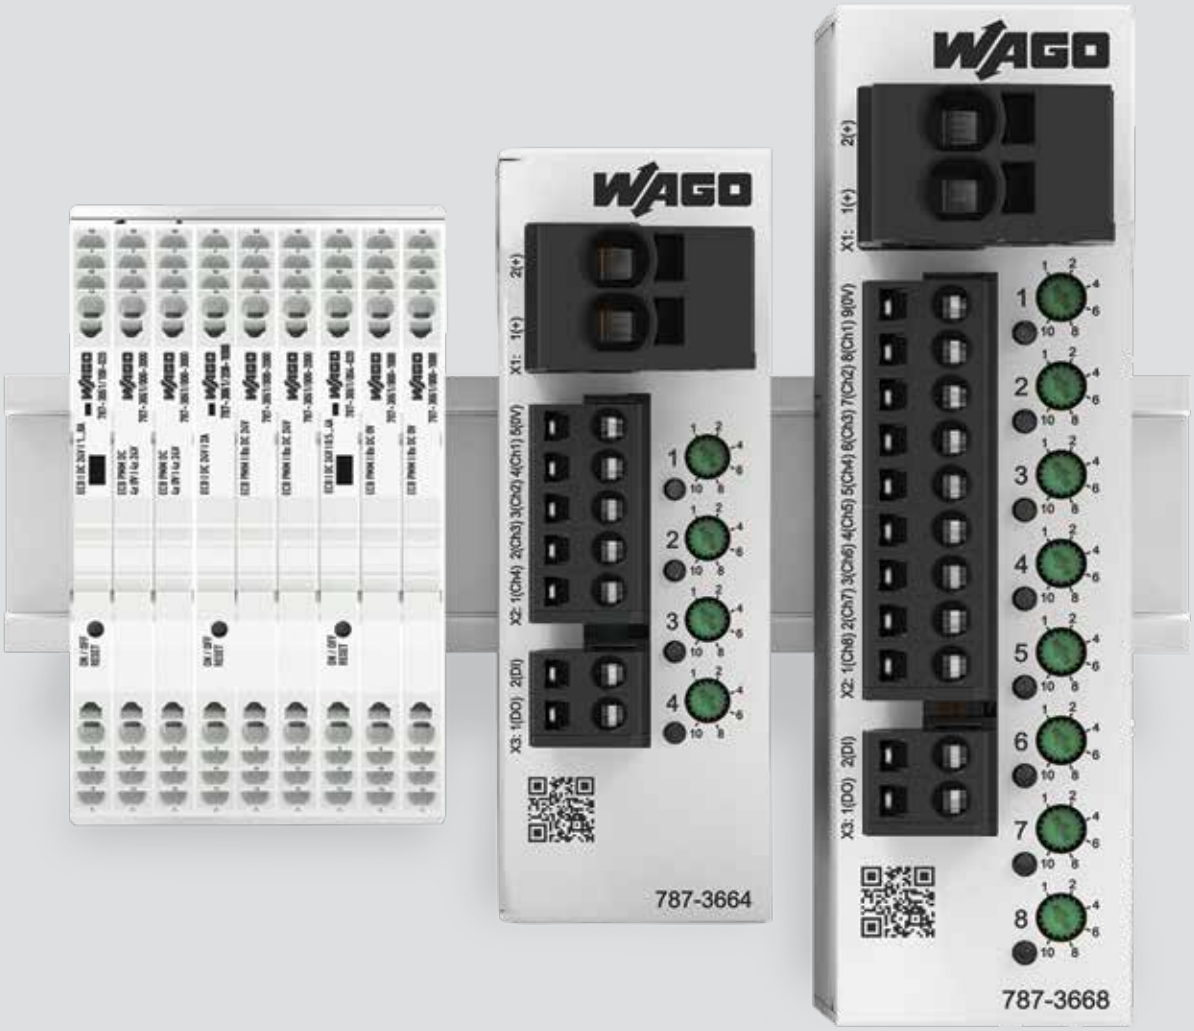

Why Secondary-Side Fuse Protection?


On the secondary side, switched-mode power supplies provide DC voltage to control circuit loads, such as controllers, operating panels, displays, and auxiliary relays. These control circuits need wiring protection and may also require device protection if the load has no protective unit of its own. Furthermore, the Machinery Directive (EN 60204-1) requires that hazardous ground faults in control circuits be detected and switched off within five seconds.


The overcurrent protection in primary switched-mode power supplies reacts very quickly to overcurrents on the output side. However, selective protection of individual current paths in the secondary circuit via fuses or conventional circuit breakers is often ineffective if the power supply cannot provide sufficiently high overcurrent, or if sufficiently high current cannot flow due to impedance.

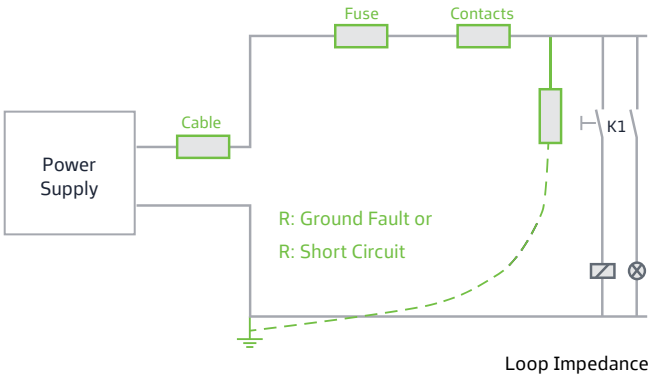


Loop Impedance

What Types of Fuse Protection Are There?



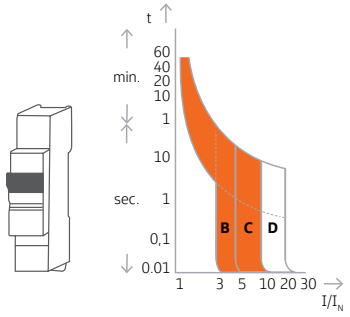

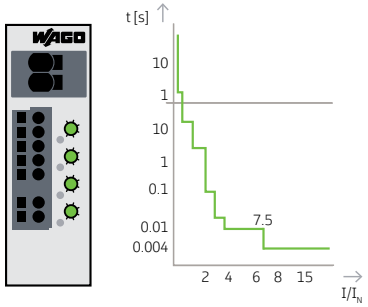

Thermal

- High overcurrents required for fast tripping
- Found in NH and DP fuses, for example
- In the example: 10-fold overcurrent (based on the nominal value of the fuse)
- Tripping within the 30 ms (best case) or 200 ms (worst case) range
- Only two-fold overcurrent: tripping within the 2 s (best case) or >100 s (worst case) range

Thermal and Magnetic

- Found in circuit breakers or motor protection switches
- High overcurrents required for fast tripping
- In the example: three-fold to five-fold overcurrent for B-characteristic and AC operation; additional DC safety factor of 1.2 or 1.5
- Thus, in the worst-case scenario, a tripping current 7.5 times the nominal current is necessary

Electronic


- Precision setting options
- Responds within a short time, even with low overcurrents
- Can protect long cable runs and small cross-sections

 NH fuse = low-voltage high-power fuse; **DP fuse** = miniature device protection fuse

How Does an ECB Work?


An ECB monitors whether the output current is greater than the nominal current. As soon as the output current exceeds the nominal current and the current analysis indicates a short circuit rather than a switch-on process, the output is switched off electronically by a semiconductor switch. The tripping time depends on the magnitude of the overcurrent.

The measurement of the output current, the processing and calculation of the tripping time, and the actuation of the semiconductor switch are performed by a microprocessor that monitors one or more output channels. Examples of the corresponding tripping times can be found in the figure on the right.

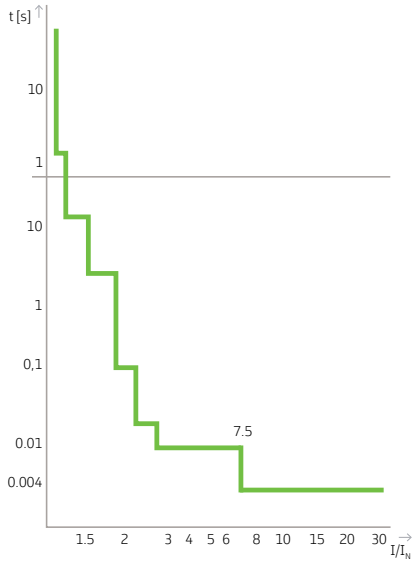

Advantages of ECBs

- Can switch off secondary-side overcurrents and short circuits – even for long cable runs and small conductor cross-sections – with precision, speed and repeatability
- Integrated load management effectively reduces the current flow during the switch-on process. The following functions are executed based on the connected loads: With the ability to preload capacitive loads with quick pulses and then time delayed channel activation, burden is reduced on the power supply
- Remote control and monitoring via digital input and output or IO-Link, Manchester protocol or Modbus RTU
- Compact size/width, e.g., eight output channels in just 32 mm
- The nominal current can be set for each channel
- Meets EN 60204-1 requirements for dependable switch-off of ground faults within five seconds

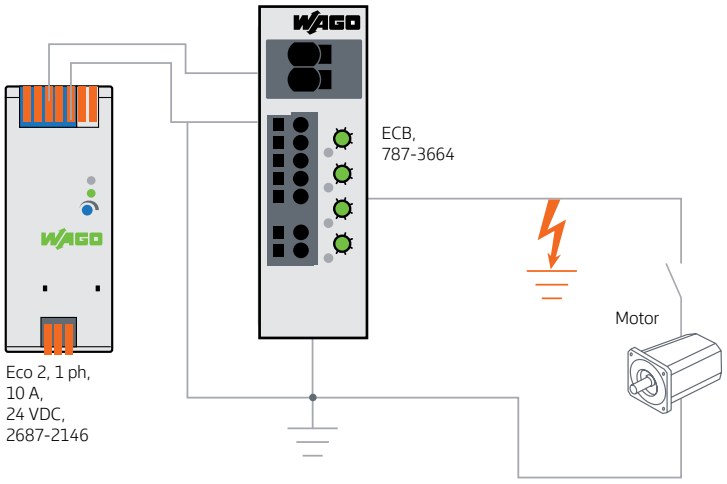


Precise, Compact ECBs for DC Circuits





Push-In CAGE CLAMP® Connection

- Push-In CAGE CLAMP® connection for tool-free termination of solid and stranded conductors with ferrules




Easy Wiring

- Input potential up to 40 A via double connection
- Signal output can be commoned for up to 30 devices
- Total reset by commoning the signal inputs




Intuitive Status Indication

- Integrated multi-color LEDs (green/yellow/red) indicate the operating status of each channel
- An operating button for ON/OFF, RESET and ECB configuration



Trip Characteristics

- Reliable, fast, precise disconnection in case of overcurrent or short circuit
- High switch-on capacities >50,000 µF (for NEC Class 2 versions: >7,000 µF)



The Industry's Most Compact

- "True" 6 mm width maximizes panel space



Marking

- Device labeling with WMB Markers or WAGO TOPJOB® S Marking Strips

---



Versatile Configuration Options

- Optional nominal current setting 1 … 4 A in 0.5 A increments or 1 … 8 A in 1 A increments
- Comprehensive configuration options for the digital signal output

4- and 8-Channel ECBs





Intuitive Status Indication


- Backlit buttons for each output channel
- For switch-on/switch-off and acknowledgment
- Integrated, multi-color LEDs indicate the operating status of each channel



Communication 1.0


- Remote digital input DI for switching and resetting all tripped channels
- Digital output DO as a group message indicating whether one of the channels was tripped by an overcurrent

---



Trip Characteristics

- Reliable, precise disconnection in case of overcurrent or short circuit
- Nominal currents can be set separately for each channel in 1 A, 2 A, 4 A, 6 A and 10 A increments
- Parallel connection of channels for higher nominal currents of 11, 12, 14 and 16 A



Communication 2.0

- Remote digital input MDI (S1) for switching specific channels on and off via pulse sequence (Manchester protocol)
- Digital output MDO (S2) for transmitting the current status (on/off/tripped/overcurrent) of each individual channel
- Optional transmission of input voltage and output/nominal current value for each channel

---




Rotary Switch

- Nominal current for each channel can be adjusted individually from 1 to 16 A
- The setting is visible even when no voltage is applied
- Switchable electronic key lock protects against incorrect operation

Communication 3.0

- Modbus RTU or IO-Link interface
- Readout of status, nominal current setting, current voltage values and current values for each channel
- Setting the nominal current, as well as switch-on/off and reset of individual channels

Communications

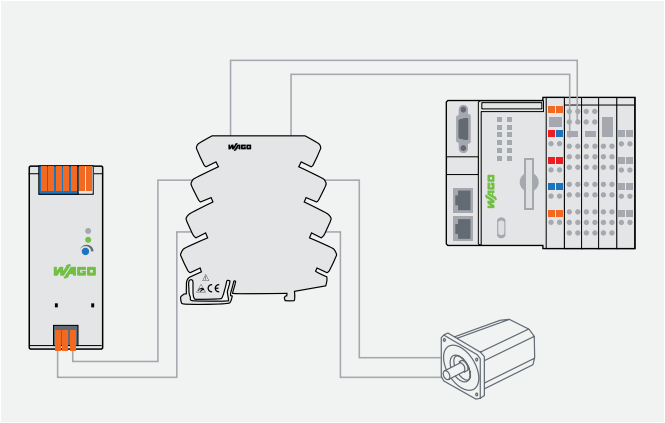


Communication 1.0

Digital Signaling


ECBs can be reset remotely via a digital control signal (S1/DI). The devices can also be switched on and off via S1/DI.

The digital output signal (S2/DO) reports the status of the channel or the sum of the channels. This output signal can be configured individually and can provide information about the DC OK contact, or even a warning threshold (70%, 80%, or 90%), for example.




Communication 2.0

For each channel, both its status and its voltage and current values can be transmitted individually via the integrated communication interfaces. In addition to control, it is also possible to set the nominal currents and make other settings. A position on the rotary wheels is provided specifically for configuration access via the communication; this also makes it possible to block manual interventions from the outside on the software side later.

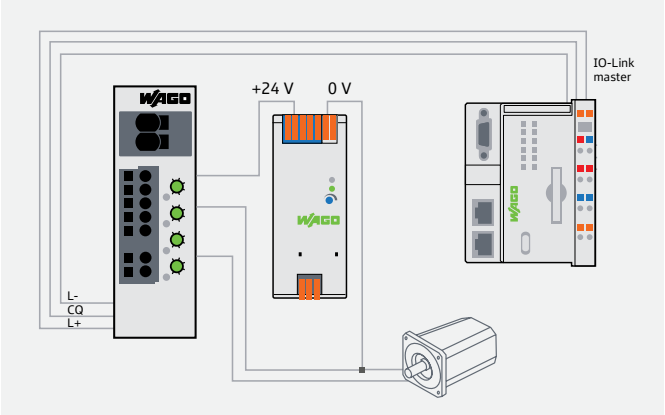


Manchester Protocol

The PLC communicates with the circuit breaker via a coded pulse pattern using one digital input and one digital output. This allows queries and commands to be transmitted and processed. In parallel with this, the current status of all output channels is sent via an additional signal output as a group message. This allows direct signaling in the event of status changes, in addition to the query via the protocol.




Communication 3.0

Through an IO-Link interface implemented in COM3, the status and voltage/current values of each channel can be transmitted individually, in addition to configuring and setting the nominal currents.

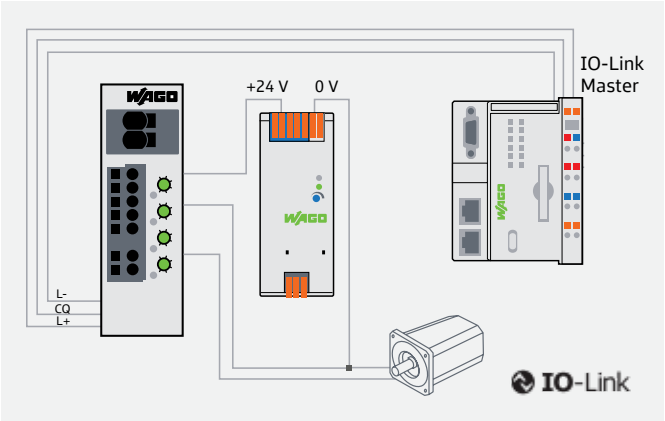

IO-Link


Besides simple port-based initialization, IO-Link offers significantly faster, cyclical communication and requires no additional digital signaling.

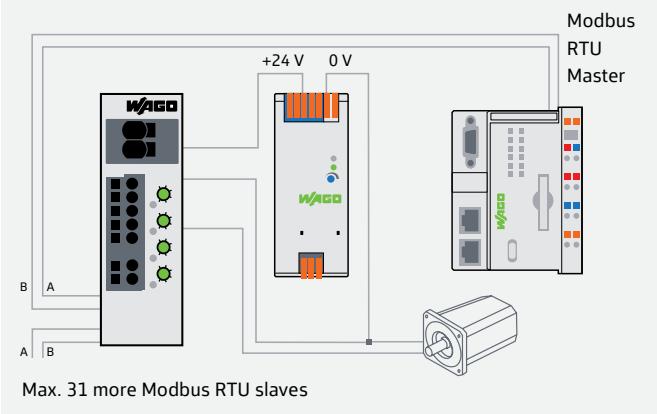

Max. 31 more Modbus RTU slaves

Modbus RTU

The Modbus RTU interface offers a standardized communication protocol that enables easy integration into existing systems and guarantees reliable cyclic data transmission. ECBs can be combined in sequence by daisy-chaining the communication from device to device and using integrated switchable end resistors.

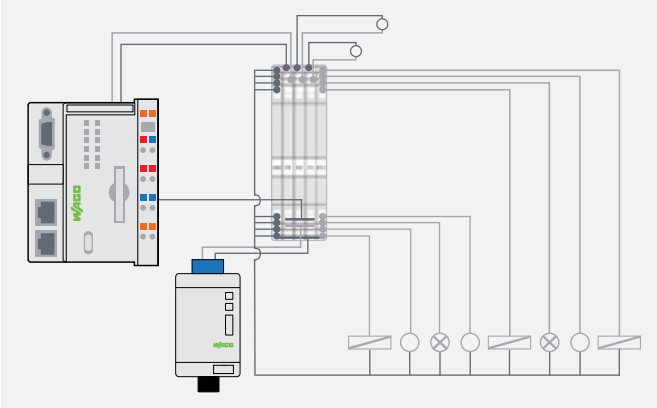

Potential Distribution Modules


Item Number 787-3861/000-3000 (4 × GND / 4 × 24 VDC)

Item Number 787-3861/000-2000 (8 × 24 VDC)

Item Number 787-3861/000-1000 (8 × GND)

Our single-channel ECB (Item Number 787-3861/X) comes standard with 2 × Vout and 1 × GND potential on the output. For optimal distribution of this potential, we recommend using the associated potential distribution modules from our portfolio. These modules fit seamlessly with the contours of our ECBs and offer an easy way to distribute the potential. By using them, you not only save time and effort during wiring but also reduce the number of rail-mount terminal blocks required.


Product Overview



1 Channel



4 Channels



8 Channels

Item Number	Nominal Voltage DC	Channels	Adjustable Nominal Current	Communications	Other Information
787-3861/050-1000	24	1	0.5 A	Digital Input and Output	NEC class 2
787-3861/100-1000	24	1	1 A	Digital Input and Output	NEC class 2
787-3861/200-1000	24	1	2 A	Digital Input and Output	NEC class 2
787-3861/400-1000	24	1	4 A	Digital Input and Output	NEC class 2
787-3861/004-1020	24	1	0.5 ... 4 A	Digital Input and Output	NEC class 2
787-3861/050-0000	24	1	0.5 A	Digital Input and Output	/
787-3861/100-0000	24	1	1 A	Digital Input and Output	/
787-3861/200-0000	24	1	2 A	Digital Input and Output	/
787-3861/400-0000	24	1	4 A	Digital Input and Output	/
787-3861/004-0020	24	1	0.5 ... 4 A	Digital Input and Output	/
787-3861/600-0000	24	1	6 A	Digital Input and Output	/
787-3861/800-0000	24	1	8 A	Digital Input and Output	/
787-3861/108-0200	24	1	1 ... 8 A	Digital Input and Output	/
787-3861/000-1000	24	1	/	Digital Input and Output	Potential Distribution Module (0 V / 24 V)
787-3861/000-2000	24	1	/	Digital Input and Output	Potential Distribution Module (24 V)
787-3861/000-3000	24	1	/	Digital Input and Output	Potential Distribution Module (0 V)
787-3664	24	4	1 ... 16 A	Digital input and output	Parallel Operation and Key Lock
2596-3664/0000-0050	24	4	1 ... 16 A	Manchester Protocol	Parallel Operation and Key Lock
2596-3664/0000-0080	24	4	1 ... 16 A	IO-Link	Parallel Operation and Key Lock
2596-3664/0000-0060	24	4	1 ... 16 A	Modbus RTU	Parallel Operation and Key Lock
787-3668	24	8	1 ... 16 A	Digital Input and Output	Parallel Operation and Key Lock
2596-3668/0000-0050	24	8	1 ... 16 A	Manchester Protocol	Parallel Operation and Key Lock
2596-3668/0000-0080	24	8	1 ... 16 A	IO-Link	Parallel Operation and Key Lock
2596-3668/0000-0060	24	8	1 ... 16 A	Modbus RTU	Parallel Operation and Key Lock

WAGO's high-efficiency power supplies deliver a stable, constant output voltage, while electronic circuit breakers provide precise protection by selectively isolating faults without disrupting operation. They work together to create a reliable, intelligent power distribution system, supporting seamless upgrades, simplified maintenance, and scalable performance for applications of any size.

Pro 2 Power Supply

Keep up with the demands of today's applications using WAGO's Pro 2 Power Supplies. They combine incomparable efficiency and exceptional high-power density for ultimate control cabinet flexibility. With units ranging from 120 to 960 W, these power supplies set new standards for communication and parameterization flexibility and offer energy conversion efficiency of up to 96.3%.





Eco 2 Power Supply

WAGO's Eco 2 Power Supplies feature push in technology and integrated levers. These devices offer fast, reliable, and tool free wiring, delivering an exceptional price to performance ratio. With products as slim as 25 mm, the Eco 2 power supplies save valuable panel space while maintaining durability and long term reliability.



Base Power Supply

The WAGO Base Power Supply Series offers reliable, efficient performance with front wiring and Push-In CAGE CLAMP® connections for tool-free setup. With compact, durable metal housing and a wide temperature range of -30 °C … +70 °C, it's the cost-effective power solution you can trust.

WAGO Corporation
N120 W19129 Freistadt Road
Germantown, Wisconsin 53022
Telephone: 800 / DIN-Rail (346-7245)
Fax: 262 / 255-3232
info.us@wago.com
www.wago.us

WAGO Canada Inc.
1550 Yorkton Court, Unit 1
Burlington, ON
L7P 5B7
Telephone: 888 / WAGO 221 (924-6221)
info.ca@wago.com
www.wago.ca

WAGO SA DE CV
Carretera estatal 431 Km. 2+200. Lote 99 6
Parque Industrial Tecnologico Innovacion Queretaro
El Marques, Qro. 76246
Lada sin Costo: 01 800 288 WAGO (288-9246)
Telefono: 422 / 221-5946
info.mx@wago.com
www.wago.mx

WAGO is registered trademark of WAGO Verwaltungsgesellschaft mbH.
"Copyright - WAGO Kontakttechnik GmbH-Co. KG - all rights reserved. The content and structure of the WAGO Websites, catalogs, videos, and other WAGO media are subject to copyright. The dissemination or changing of the content of these pages and videos is not permitted. Furthermore, the content may neither be copied nor made available to third parties for commercial purposes. Also subject to copyright are the images and videos that were made available to WAGO Kontakttechnik GmbH-Co. KG by third parties."

60563178 0888-0832/0000-0510 - March 2026 - Printed in the United States