

# 2500P-ECC1

## Ethernet Communications Coprocessor



### Description

The 2500P-ECC1 Ethernet Communications Coprocessor module provides a high performance multi-protocol networking solution for CTI 2500 Series<sup>®</sup> processors. Up to 4 modules can be connected to one processor.

**IMPORTANT NOTE: Because 2500P-ECC1 employs an advanced dynamic cache communications engine, it requires a CTI 2500 Series<sup>®</sup> processor with firmware at V7.05 or above for operation.**

When used in a SCADA application, the 2500P-ECC1 module can provide sub-second response, even with a large number of HMI workstations, because requests are serviced from a cache of PLC data. Since the 2500P-ECC1 module communicates with its host processor over a high speed Ethernet link instead of the special function I/O interface, items in the data cache can be kept current, even when the number of cached items is large.

When executing client protocols, the 2500P-ECC1 can initiate the requests automatically on a time interval or on change in data value, eliminating the need for additional programming. Optionally, requests can be initiated and monitored using PLC logic, if required.

The Network Data Exchange protocol provides an efficient method for sharing data among CTI 2500 Series<sup>®</sup> processors.

The 2500P-ECC1 includes an embedded Web server which can be used to display module

information and diagnostic data.

### Standard Communications Protocols

The 2500P-ECC1 supports the following protocols.

- **CAMP Server**

The CAMP Server protocol provides access to a wide range of data element types, including loop and alarm data. If you are already using a CAMP HMI driver to access 2500 Series<sup>®</sup> or SIMATIC 505<sup>®</sup> controller data, this driver can be used with the 2500P-ECC1 CAMP Server. The CAMP server supports TCP, UDP and UDP multicast.

- **CAMP Client**

The CAMP Client enables reading and writing of V memory locations in CTI 2500 Series<sup>®</sup> or SIMATIC 505<sup>®</sup> controllers (via a CTI 2572 or 2572-A module). You can choose to send requests using TCP, UDP, or UDP multicast.

**Important Note:** CAMP Server and CAMP client protocols include "IP Multicast" capability to allow operation with legacy 2572-A peer-peer applications using IP multicast.

- **Open Modbus Server**

The Open Modbus Server allows programmable controllers and other automation equipment that can act as a Modbus TCP/IP client to read and write user-designated C and V memory in the 2500 Series<sup>®</sup> processor.

- **Open Modbus Client**

The Open Modbus Client enables the 2500 Series<sup>®</sup> processor to communicate with a wide variety of automation devices that support Modbus TCP/IP. A Modbus Ethernet to Serial gateway can be used to communicate with Modbus devices that use RS-232 or RS-485 connections.

- **Network Data Exchange**

Network Data Exchange uses the publisher subscriber model to transfer data among CTI 2500 Series<sup>®</sup> processors. Each participating 2500 Series<sup>®</sup> processor requires an associated 2500P-ECC1 module to act in its behalf.

Each 2500P-ECC1 module publishes data obtained from its associated host processor. The data items to be published are specified when the module is configured. A data item is



**Control Technology Inc.**


5734 Middlebrook Pike, Knoxville, TN 37921-5962  
Phone: +1.865.584.0440 Fax: +1.865.584.5720  
www.controltechnology.com

published only if a subscription to the item exists and only when the value of the data item changes.

Each participating 2500P-ECC1 module can also be configured to subscribe to data items from one or more publishers. When a subscribed data item is received, the 2500P-ECC1 writes the data to its associated host processor.

## Configuration

Using the CTI 2500P-ECC1 Configuration Program, you can customize the 2500P-ECC1 module to meet your application requirements. The program allows you to select the protocol(s) to be used and specify how each will function. Protocols with a fixed function, such as the CAMP Server, require no configuration other than enabling them. For protocols with a wide variety of applications, like the Modbus Client, the program provides extensive

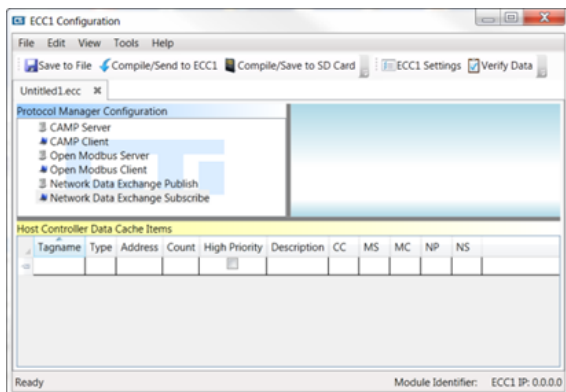

configuration options.

The CTI 2500P-ECC1 Configuration Program also enables you to manage the 2500P-ECC1 data cache. Items that require a more timely cache update than others can be assigned to a Priority cache refresh interval. You can set the Normal and Priority cache refresh intervals to meet your application needs.

For the CAMP Server protocol, which can directly access processor data types, data cache membership is automatically determined based on access frequency. For other protocols, which require processor data to be mapped to the protocol data, you can specify the processor data items to be cached and assign a tagname to them. When the protocol is configured, the tagname is used to reference the processor data to be mapped.

The CTI 2500P-ECC1 Configuration

Program creates configuration files, which can be transferred to the 2500P-ECC1 module over an Ethernet connection. Alternately, the files can be saved to an SD card, which is then inserted in the module. Since configuration files are stored on a removable SD card, the configuration can be transferred to an emergency replacement module, if necessary.

The ECC1 CTI Configuration Program requires Microsoft Windows<sup>®</sup> XP, Vista, or Windows 7.

## Features

- Provides rapid response to HMI requests by caching PLC data on the 2500P-ECC1 module.
- Uses a high-bandwidth Ethernet link to transfer data between the module and a 2500 Series<sup>®</sup> processor.
- Initiates client requests automatically on a fixed time interval or on a change in data value, eliminating the need for additional user logic.
- Offloads communications processing workload from the 2500 Series<sup>®</sup> processor.
- Supports a large number of network connections to network devices.
- Windows-based configuration program simplifies protocol configuration.

## Hardware Specifications

**Module Size:** Single Wide

### Ethernet Ports:

**Number of Ports:** 2 (Switched)

**Connectors:** RJ-45 (Auto-MDIX)

**Speed:** 10Mb or 100Mb (auto-negotiated)

**Duplex:** Half or Full (auto-negotiated)

**Ethernet Storm Protection:** Broadcast/  
Multicast

### Status LEDs:

**GOOD:** Module Operational Status

**HOST:** Host Controller Connection Status

**ACTIVE:** Protocol Execution Status

**XMT:** Ethernet Transmit

**RCV:** Ethernet Receive

**LINK:** Link Status (Port 1 and Port 2)

**ACT:** Activity (Port 1 and Port2)

### Status Display:

Three character LED display for system status, error reporting, and IP address.

**Serial Port:****Connector:** DB-9**Electrical Interface:** RS-232, RS-422, RS-485**Baud Rates:** 1200b -115Kb**Backplane Power:** 5.0 watts**Operating Temperature**

0-60°C (-40 – 85°F)

**Storage Temp**

-40 to 85°C (-40 to 185° F)

**Relative Humidity**

5% to 95% non-condensing

**Agency Approvals (pending)**

UL, UL-C, CE

Class 1 Div 2

**Shipping Weight**

1.5 lb. (0.68 Kg)

## Compatibility of Ethernet Interface Solutions for 2500 Series® Systems

Feature	2500-Cxxx Processor	2500P-ECC1	2572 Ethernet Module	2572-A Ethernet Module
100Mbit ethernet	yes	yes	no	yes
TCP communications	yes	yes	yes	yes
UDP communications	no	yes	yes	yes
DHCP for IP address assignment	no	no	no	yes
Modbus-TCP	no	yes	no	yes
Ethernet-IP (communicate to ControlLogix®)	no	no	no	yes
Send/Receive (communicate to S7®)	no	no	yes	no
Multicast	no	yes	no	yes
Datashare	no	no	yes	no
Peer-Peer communications	server only	client/server	client/server	client/server
Communicates with CTI OPC/DDE servers	yes	yes	yes	yes
Port configuration using PLC logic	no	no	yes	yes
Email	no	no	yes	no
Webserver for diagnostics	yes	yes	no	yes
Number of TCP connections	Programming: 1 HMI: 3	see note 1 below	16	see note 2 below
Compatible with Siemens® CPUs	N/A	no	yes	yes

**Note 1—2500P-ECC1 Maximum Ethernet Connections**

CAMP Server—16 TCP + UDP  
CAMP Client—16 (total of TCP and UDP)  
Modbus Server—16 TCP only  
Modbus Client/Master—64 (total of TCP and UDP)  
Network Data Exchange Publisher—20 TCP  
Network Data Exchange Subscriber—20 TCP

**Note 2—2572A Maximum Ethernet Connections**

CAMP Server—24 TCP + UDP  
CAMP Client—8 (total of TCP and UDP)  
Ethernet/IP Server—8 connections  
Modbus Server—8 connections