VRL SERIES

The VRL series is the all-rounder in the planetary gearbox marketplace. With helical gearing, robust internal construction, smooth operation and high torque density, this product is truly best-in-class. 5 arc-min backlash allows the VRL to be applied to a wide range of applications where accuracy and dynamics are in play, but cost is of concern.

The VRL is an excellent choice for servo applications in packaging, handling and automation systems. A variety of standard wash down and food grade options are available, making it an attractive option for the toughest environments. We offer the broadest selection of frame sizes and ratios, giving our customers more flexibility than ever before. Industry standard mounting dimensions allow the VRL to be implemented in legacy machine designs, saving our customers valuable time.

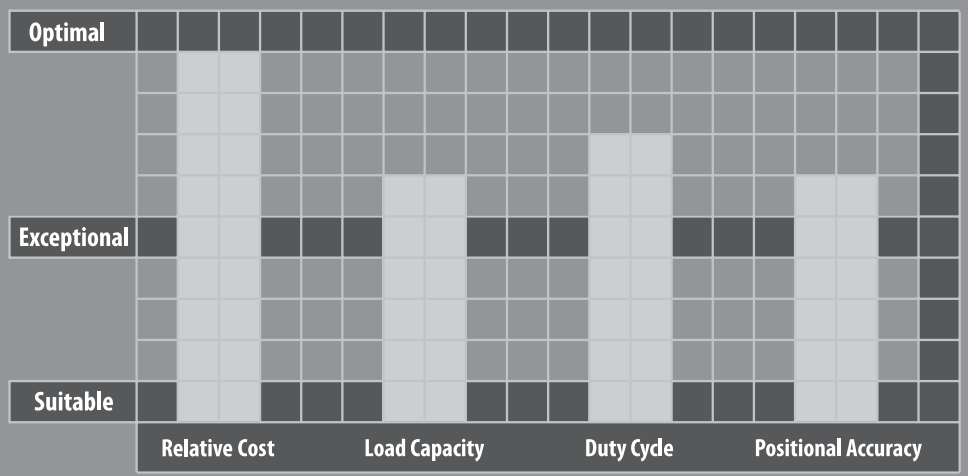

VRL SERIES

- The all-rounder for mid to high end motion control applications
- The widest range of frame sizes and ratios available in the market
- Best-In-class backlash (≤5 arc-min)
- Broad range of mounting adapters offer a simple, precise attachment to any motor
- Maintenance-free solution that is lubricated for life. High performance grease allows flexible mounting in any orientation
- Industry standard mounting dimensions
- Assembled in the USA, with immediate delivery

VRL Series Features

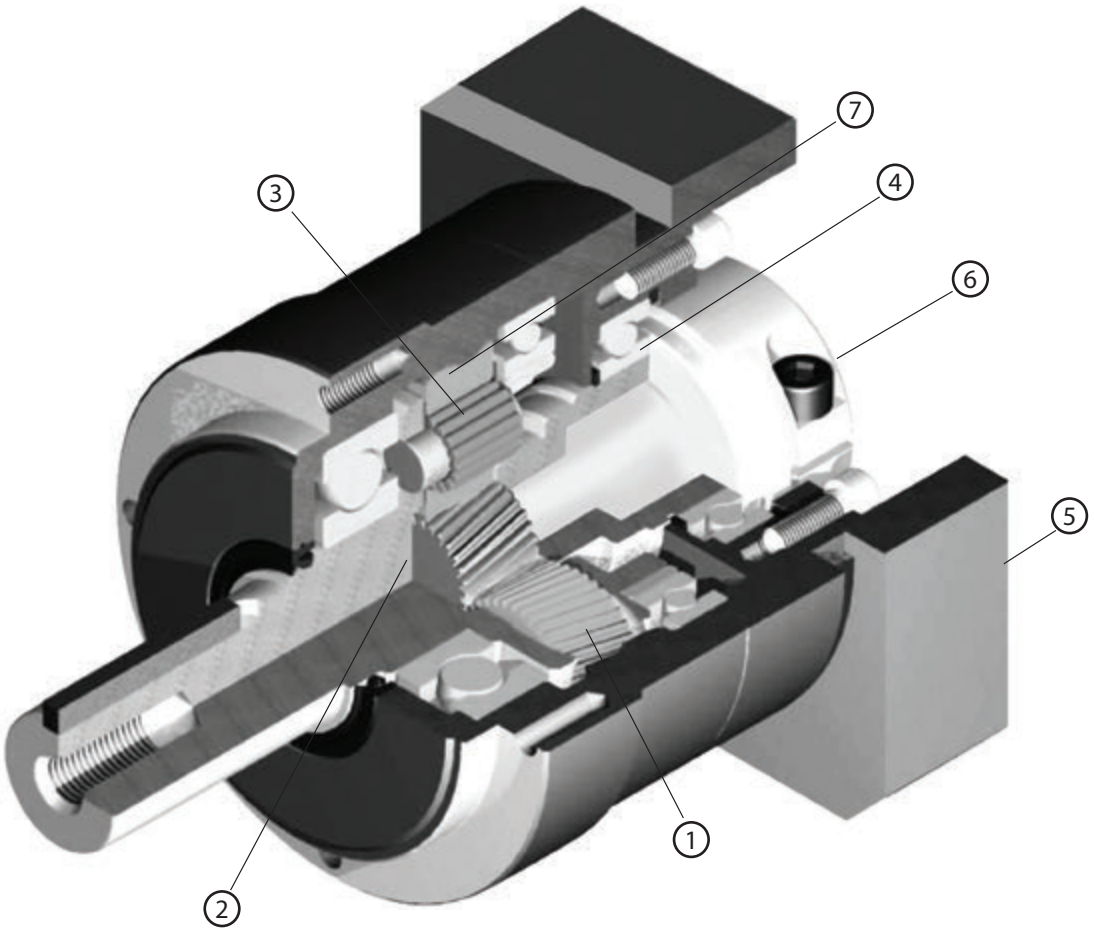

1. Carburized helical gears with proprietary secondary finishing process for higher accuracy and smooth, quiet operation. 40% higher tooth surface area than the industry standard
2. One piece output shaft and planet carrier with two bearings straddling the planet gears. Higher stiffness, torque capacity and safety factor, with guaranteed alignment of gearing
3. Uncaged needle roller bearings provide excellent torque density and torsional rigidity. 43% larger bearing surface area compared to the rest of the industry
4. Unique labyrinth input seal design greatly reduces heat and increases system efficiency. IP65 protection is available for wash down applications
5. Optimized mounting system with active centering on motor pilot diameter guarantees alignment of motor. Motor can be installed in any orientation
6. True concentric motor shaft clamping connection, optimized for your specific motor. Reduced inertia for dynamic performance and balanced for high speed operation
7. Ring gear machined directly into the housing, not welded or pressed in. Provides greater concentricity and elimination of speed fluctuation

VRL Series Model Code

VRL – 090 C – 7 – K 5 – 19HB16

- **VRL** — Series
- **090** — Frame size: 050, 070, 090, 120, 155, 205, 235
- **C** — Design version
- **7** — Ratio: 1-Stage: 3, 4, 5, 6, 7, 8, 9, 10; 2-Stage: 15, 16, 20, 25, 28, 30, 35, 40, 45, 50, 60, 70, 80, 90, 100
- **K** — Output mounting style: K: Keyed Shaft; S: Smooth shaft
- **5** — Backlash: 5 arc-min
- **19HB16** — Motor mounting code (*1)

*1) Motor mounting code varies depending on the motor. Use the selection tool link below to configure the code.

Contact us for additional information or refer to our online gearhead selection tool.
Selection tool www.nidec-shimpo.co.jp/selection/eng

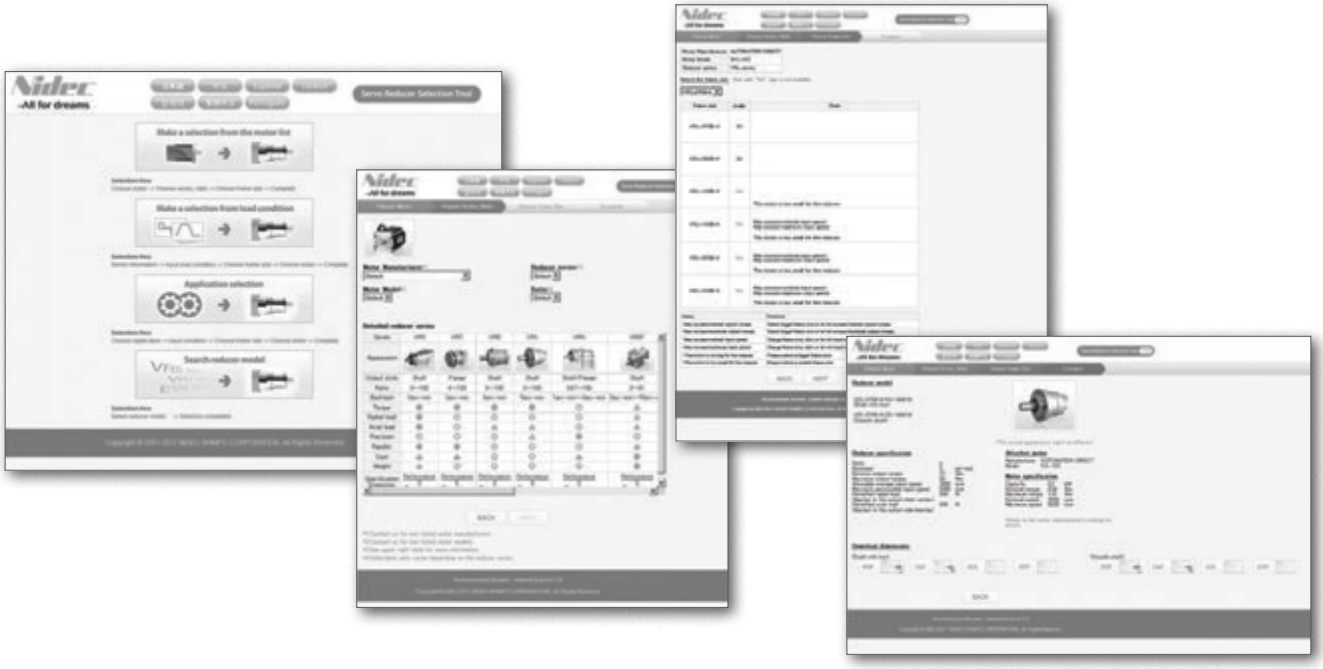

VRL 050 1-Stage Specifications

Frame Size			**050**							
Ratio	Units	Note	3	4	5	6	7	8	9	10
Nominal Output Torque	[Nm]	*1	6	9	10	10	10	10	10	10
Maximum Acceleration Torque	[Nm]	*2	14	21	21	21	21	21	14	14
Maximum Torque	[Nm]	*3	17	25	25	25	25	25	17	17
Emergency Stop Torque	[Nm]	*4	30	35	35	35	35	35	30	30
Nominal Input Speed	[rpm]	*5	4000	4000	4000	4000	4000	4000	4000	4000
Maximum Input Speed	[rpm]	*6	8000	8000	8000	8000	8000	8000	8000	8000
No Load Running Torque	[Nm]	*7	0.03							
Maximum Radial Load	[N]	*8	710							
Maximum Axial Load	[N]	*9	640							
Moment of Inertia (≤Ø 8)	[kgcm2]	--	0.053	0.041	0.036	0.034	0.032	0.031	0.031	0.030
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	0.17	0.16	0.15	0.15	0.15	0.15	0.15	0.15
Efficiency	[%]	*10	95							
Torsional Rigidity	[Nm/arc-min]	*11	2							
Maximum Torsional Backlash	[arc-min]	--	≤ 5							
Noise Level	dB [A]	*12	≤ 61							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	0.7							

VRL 050 2-Stage Specifications

Frame Size			**050**							
Ratio	Units	Note	15	16	20	25	28	30	35	40
Nominal Output Torque	[Nm]	*1	9	14	14	15	15	11	15	15
Maximum Acceleration Torque	[Nm]	*2	14	21	21	21	21	14	21	21
Maximum Torque	[Nm]	*3	17	21	21	21	21	14	21	21
Emergency Stop Torque	[Nm]	*4	30	35	35	35	35	30	35	35
Nominal Input Speed	[rpm]	*5	4000	4000	4000	4000	4000	4000	4000	4000
Maximum Input Speed	[rpm]	*6	8500	8500	8500	8500	8500	8500	8500	8500
No Load Running Torque	[Nm]	*7	0.01							
Maximum Radial Load	[N]	*8	710							
Maximum Axial Load	[N]	*9	640							
Moment of Inertia (≤Ø 8)	[kgcm2]	--	0.035	0.038	0.034	0.034	0.038	0.030	0.034	0.030
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	--	--	--	--	--	--	--	--
Efficiency	[%]	*10	90							
Torsional Rigidity	[Nm/arc-min]	*11	2							
Maximum Torsional Backlash	[arc-min]	--	≤ 7							
Noise Level	dB [A]	*12	≤ 61							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	0.8							

VRL 050 2-Stage Specifications

Frame Size			**050**						
Ratio	Units	Note	45	50	60	70	80	90	100
Nominal Output Torque	[Nm]	*1	11	15	15	15	15	11	11
Maximum Acceleration Torque	[Nm]	*2	14	21	21	21	21	14	14
Maximum Torque	[Nm]	*3	14	21	21	21	21	14	14
Emergency Stop Torque	[Nm]	*4	30	35	35	35	35	30	30
Nominal Input Speed	[rpm]	*5	4000	4000	4000	4000	4000	4000	4000
Maximum Input Speed	[rpm]	*6	8500	8500	8500	8500	8500	8500	8500
No Load Running Torque	[Nm]	*7	0.01						
Maximum Radial Load	[N]	*8	710						
Maximum Axial Load	[N]	*9	640						
Moment of Inertia (≤Ø 8)	[kgcm2]	--	0.034	0.030	0.030	0.030	0.030	0.030	0.030
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	--	--	--	--	--	--	--
Efficiency	[%]	*10	90						
Torsional Rigidity	[Nm/arc-min]	*11	2						
Maximum Torsional Backlash	[arc-min]	--	≤ 7						
Noise Level	dB [A]	*12	≤ 61						
Protection Class	--	*13	IP54 (IP65)						
Ambient Temperature	[°C]	--	0-40						
Permitted Housing Temperature	[°C]	--	90						
Weight	[kg]	*14	0.8						

*1) At nominal input speed, service life is 20,000 hours

*2) The maximum torque when starting or stopping operation. Permitted 100,000 times during service life

*3) Permitted 10,000 times during service life. Based on 10% of maximum radial load and smooth output shaft

*4) The maximum torque allowed under a stress situation. Permitted 1,000 times during service life

*5) The average input speed at nominal input torque. Maintain housing temperature below permitted value

*6) The maximum intermittent input speed

*7) Torque at no load applied to the input shaft at nominal input speed

*8) The maximum radial load that the gearbox can accept

*9) The maximum axial load that the gearbox can accept

*10) The efficiency at the nominal output torque rating

*11) This does not include lost motion

*12) Contact NIDEC-SHIMPO for the testing conditions and environment

*13) IP65 (wash-down) is available as an option. Contact NIDEC-SHIMPO for more details

*14) Weight may vary slightly between models

VRL 050 1-Stage Dimensions

Input bore size ≦φ8 mm

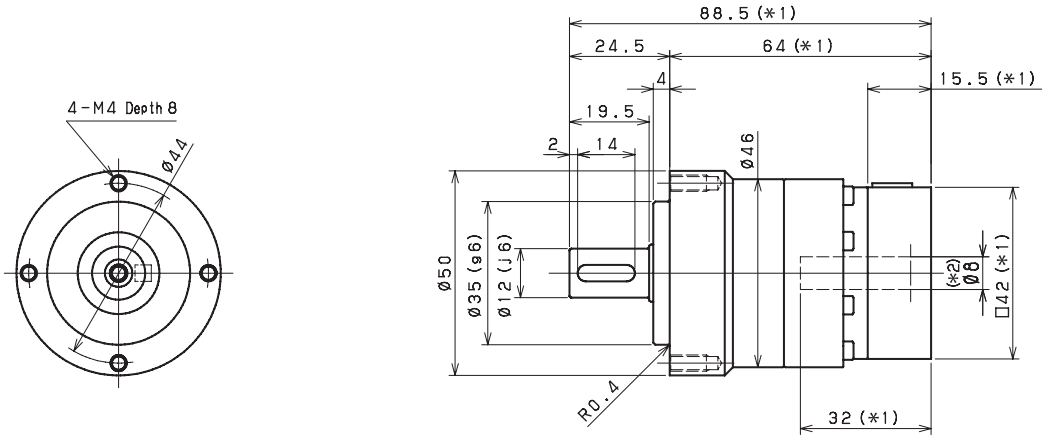

Input bore size ≦φ14 mm

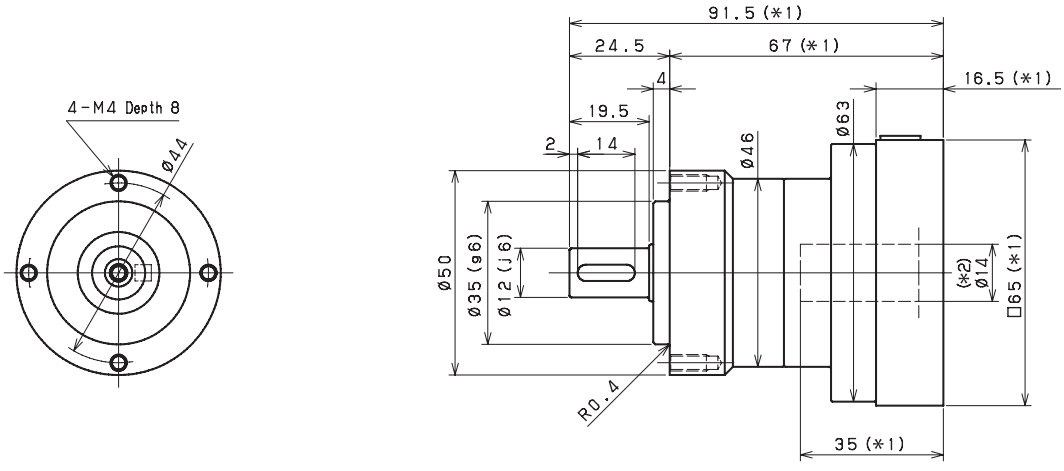

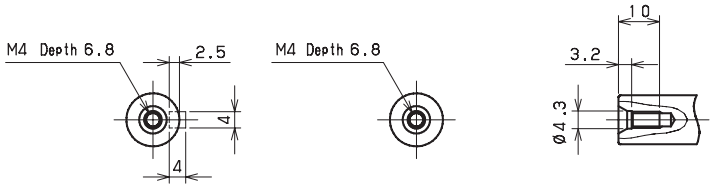

Keyed shaft

Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

VRL 050 2-Stage Dimensions

Input bore size ≦φ8 mm



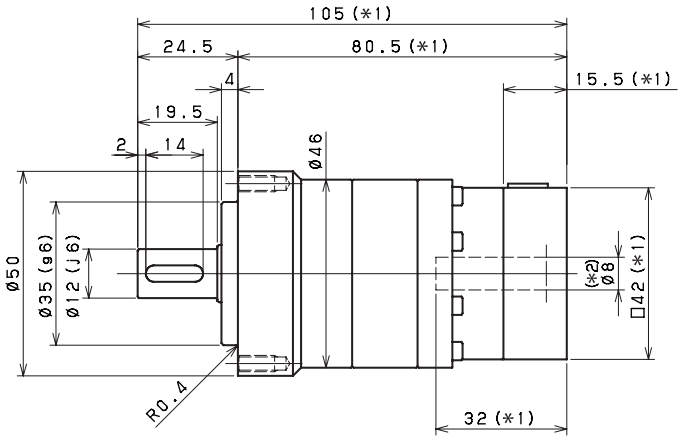



Keyed shaft



Smooth shaft



*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

VRL 070 1-Stage Specifications

Frame Size	**070**									
Ratio	Unit	Note	3	4	5	6	7	8	9	10
Nominal Output Torque	[Nm]	*1	19	27	28	28	28	28	28	28
Maximum Acceleration Torque	[Nm]	*2	46	66	66	66	66	66	46	46
Maximum Torque	[Nm]	*3	55	79	79	79	79	76	55	55
Emergency Stop Torque	[Nm]	*4	80	100	100	100	100	100	80	80
Nominal Input Speed	[rpm]	*5	3300	3300	4000	4000	4000	4000	4000	4000
Maximum Input Speed	[rpm]	*6	7500	7500	7500	7500	7500	7500	7500	7500
No Load Running Torque	[Nm]	*7	0.08							
Maximum Radial Load	[N]	*8	1200							
Maximum Axial Load	[N]	*9	1100							
Moment of Inertia (≤Ø 8)	[kgcm2]	--	0.14	0.095	0.077	0.068	0.062	0.059	0.057	0.056
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	0.25	0.21	0.19	0.18	0.17	0.17	0.17	0.17
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	0.53	0.48	0.46	0.46	0.45	0.45	0.44	0.44
Efficiency	[%]	*10	95							
Torsional Rigidity	[Nm/arcmin]	*11	3							
Maximum Torsional Backlash	[Arc-min]	--	≤ 5							
Noise Level	dB [A]	*12	≤ 66							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	1.5							

VRL 070 2-Stage Specifications

Frame Size	**070**									
Ratio	Unit	Note	15	16	20	25	28	30	35	40
Nominal Output Torque	[Nm]	*1	25	32	32	43	45	32	45	45
Maximum Acceleration Torque	[Nm]	*2	46	66	66	66	66	46	66	66
Maximum Torque	[Nm]	*3	46	66	66	66	66	46	66	66
Emergency Stop Torque	[Nm]	*4	80	100	100	100	100	80	100	100
Nominal Input Speed	[rpm]	*5	4000	4000	4000	4000	4000	4000	4000	4000
Maximum Input Speed	[rpm]	*6	8500	8500	8500	8500	8500	8500	8500	8500
No Load Running Torque	[Nm]	*7	0.04							
Maximum Radial Load	[N]	*8	1200							
Maximum Axial Load	[N]	*9	1100							
Moment of Inertia (≤Ø 8)	[kgcm2]	--	0.064	0.070	0.062	0.061	0.068	0.051	0.061	0.051
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	0.18	0.18	0.17	0.17	0.18	0.16	0.17	0.16
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	0.45	0.46	0.45	0.45	0.46	0.44	0.45	0.44
Efficiency	[%]	*10	90							
Torsional Rigidity	[Nm/arcmin]	*11	3							
Maximum Torsional Backlash	[Arc-min]	--	≤ 5							
Noise Level	dB [A]	*12	≤ 66							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	1.7							

VRL 070 2-Stage Specifications

Frame Size			**070**						
Ratio	Unit	Note	45	50	60	70	80	90	100
Nominal Output Torque	[Nm]	*1	32	45	45	45	45	32	32
Maximum Acceleration Torque	[Nm]	*2	46	66	66	66	66	46	46
Maximum Torque	[Nm]	*3	46	66	66	66	66	46	46
Emergency Stop Torque	[Nm]	*4	80	100	100	100	100	80	80
Nominal Input Speed	[rpm]	*5	4000	4800	4800	5500	5500	5500	5500
Maximum Input Speed	[rpm]	*6	8500	8500	8500	8500	8500	8500	8500
No Load Running Torque	[Nm]	*7	0.04						
Maximum Radial Load	[N]	*8	1200						
Maximum Axial Load	[N]	*9	1100						
Moment of Inertia (≤Ø 8)	[kgcm2]	--	0.061	0.051	0.051	0.051	0.051	0.051	0.051
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	0.17	0.16	0.16	0.16	0.16	0.16	0.16
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	0.45	0.44	0.44	0.44	0.44	0.44	0.44
Efficiency	[%]	*10	90						
Torsional Rigidity	[Nm/arcmin]	*11	3						
Maximum Torsional Backlash	[Arc-min]	--	≤ 5						
Noise Level	dB [A]	*12	≤ 66						
Protection Class	--	*13	IP54 (IP65)						
Ambient Temperature	[°C]	--	0-40						
Permitted Housing Temperature	[°C]	--	90						
Weight	[kg]	*14	1.7						

*1) At nominal input speed, service life is 20,000 hours

*2) The maximum torque when starting or stopping operation. Permitted 100,000 times during service life

*3) Permitted 10,000 times during service life. Based on 10% of maximum radial load and smooth output shaft

*4) The maximum torque allowed under a stress situation. Permitted 1,000 times during service life

*5) The average input speed at nominal input torque. Maintain housing temperature below permitted value

*6) The maximum intermittent input speed

*7) Torque at no load applied to the input shaft at nominal input speed

*8) The maximum radial load that the gearbox can accept

*9) The maximum axial load that the gearbox can accept

*10) The efficiency at the nominal output torque rating

*11) This does not include lost motion

*12) Contact NIDEC-SHIMPO for the testing conditions and environment

*13) IP65 (wash-down) is available as an option. Contact NIDEC-SHIMPO for more details

*14) Weight may vary slightly between models

VRL 070 1-Stage Dimensions

Input bore size ≦φ8 mm

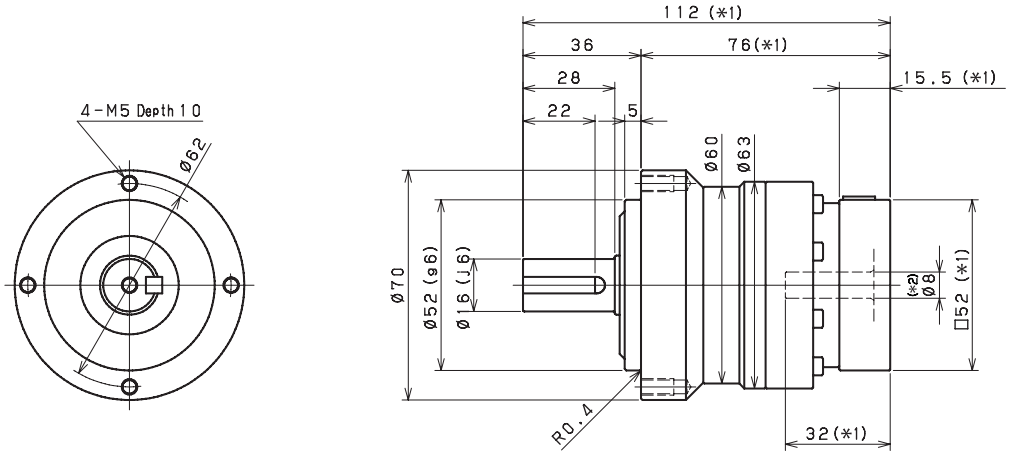

Input bore size ≦φ14 mm

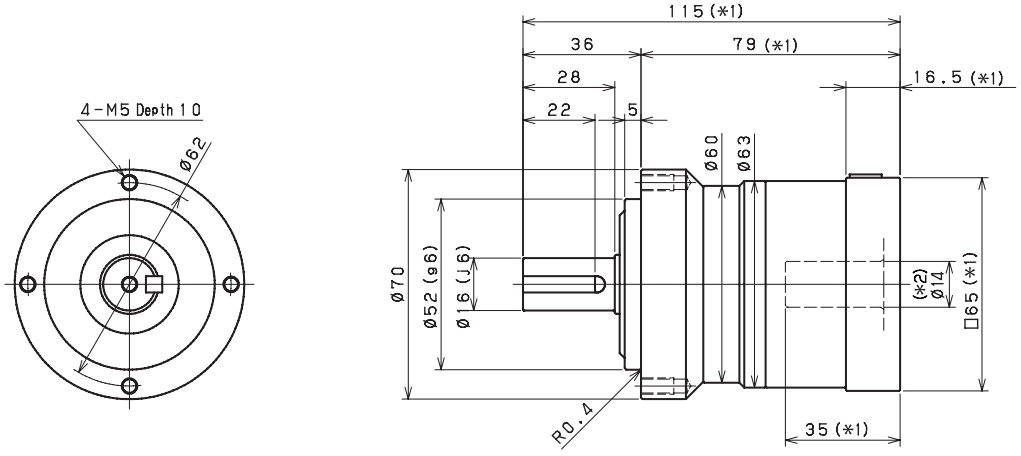

Input bore size ≦φ19 mm

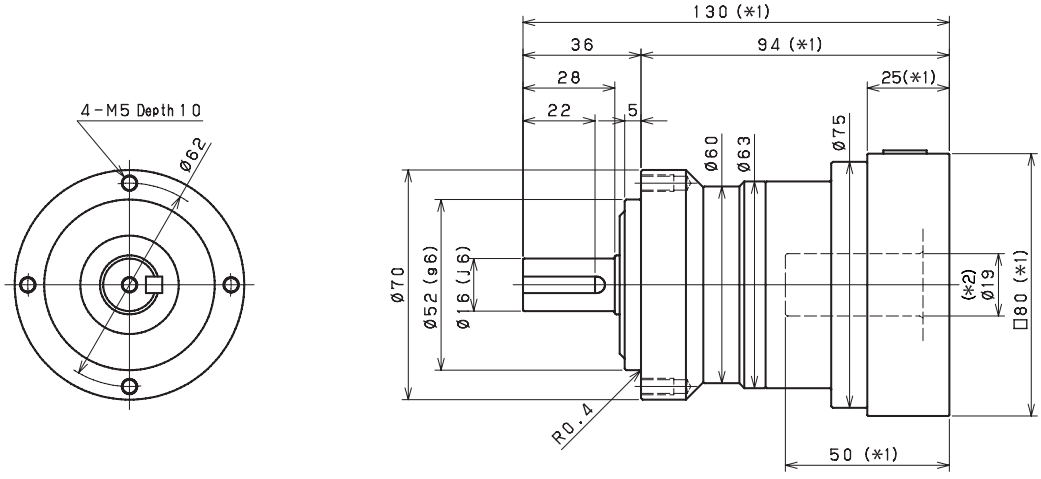

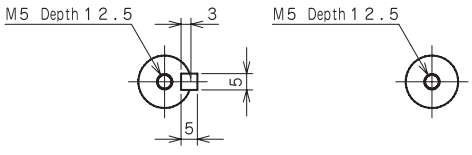

Keyed shaft Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

VRL 070 2-Stage Dimensions

Input bore size ≦φ8 mm

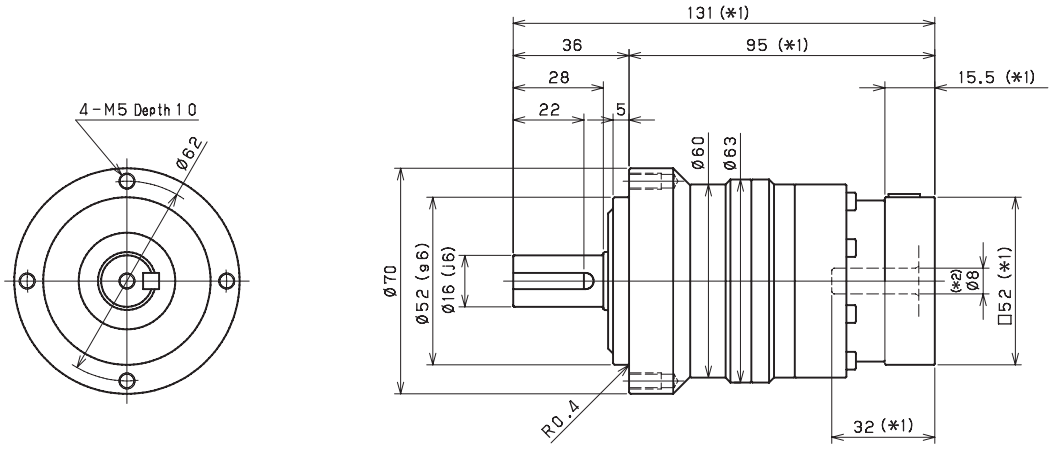

Input bore size ≦φ14 mm

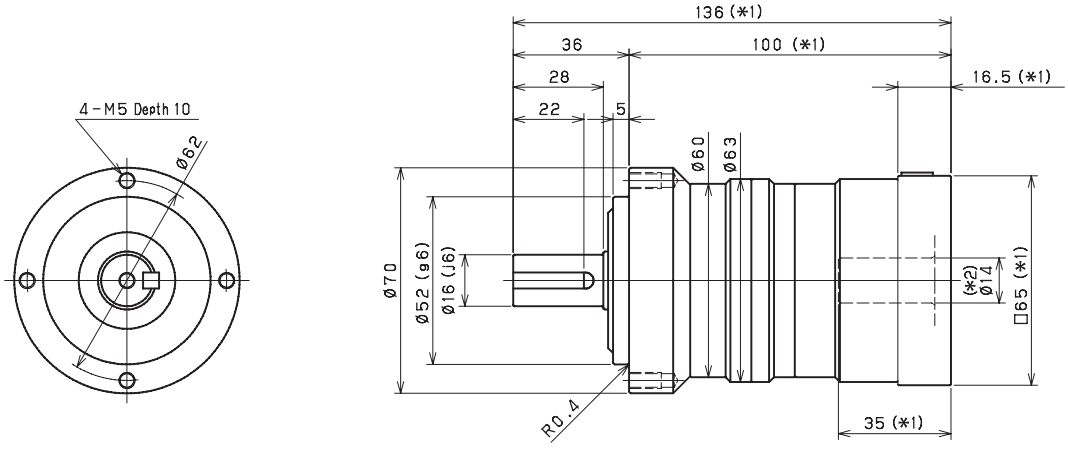

Input bore size ≦φ19 mm

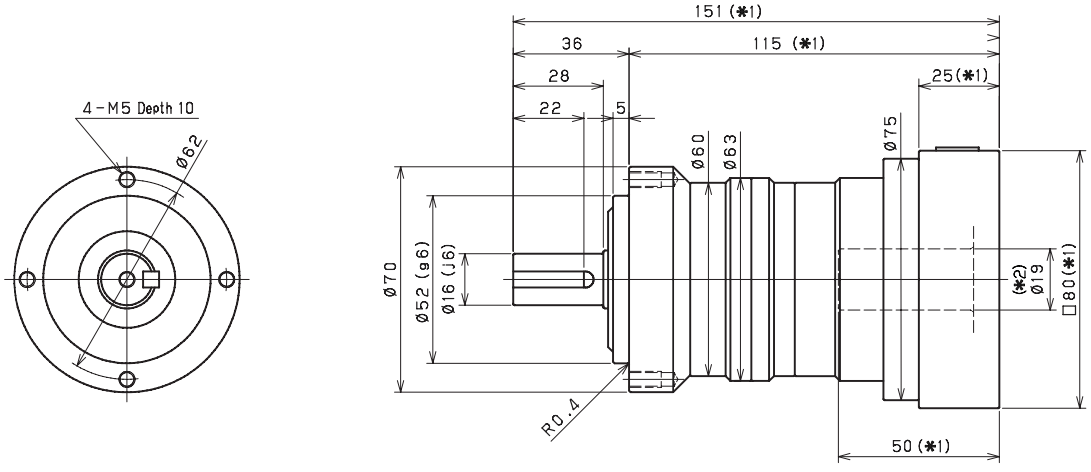

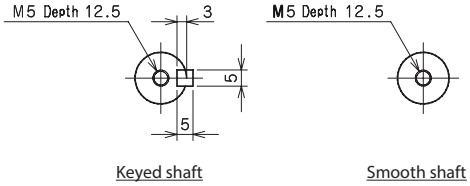

Keyed shaft Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

VRL 090 1-Stage Specifications

Frame Size	**090**									
Ratio	Unit	Note	3	4	5	6	7	8	9	10
Nominal Output Torque	[Nm]	*1	53	77	84	84	84	84	84	84
Maximum Acceleration Torque	[Nm]	*2	108	165	165	165	165	165	112	112
Maximum Torque	[Nm]	*3	135	200	200	195	195	190	145	145
Emergency Stop Torque	[Nm]	*4	200	250	250	250	250	250	200	200
Nominal Input Speed	[rpm]	*5	2900	2900	2900	2900	3100	3100	3100	3100
Maximum Input Speed	[rpm]	*6	7500	7500	7500	7500	7500	7500	7500	7500
No Load Running Torque	[Nm]	*7	0.35							
Maximum Radial Load	[N]	*8	2400							
Maximum Axial Load	[N]	*9	2200							
Moment of Inertia (≤ Ø 8)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	0.72	0.50	0.41	0.36	0.33	0.31	0.30	0.30
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	1.1	0.90	0.80	0.75	0.73	0.71	0.70	0.70
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	2.9	2.7	2.6	2.5	2.5	2.5	2.5	2.5
Efficiency	[%]	*10	95							
Torsional Rigidity	[Nm/arc-min]	*11	10							
Maximum Torsional Backlash	[arc-min]	--	≤ 5							
Noise Level	dB [A]	*12	≤ 67							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	3.5							

VRL 090 2-Stage Specifications

Frame Size	**090**									
Ratio	Unit	Note	15	16	20	25	28	30	35	40
Nominal Output Torque	[Nm]	*1	65	80	86	106	118	88	118	118
Maximum Acceleration Torque	[Nm]	*2	108	165	165	165	165	108	165	165
Maximum Torque	[Nm]	*3	108	165	165	165	165	108	165	165
Emergency Stop Torque	[Nm]	*4	200	250	250	250	250	200	250	250
Nominal Input Speed	[rpm]	*5	3500	3500	3500	3500	3500	3500	3500	3500
Maximum Input Speed	[rpm]	*6	8500	8500	8500	8500	8500	8500	8500	8500
No Load Running Torque	[Nm]	*7	0.06							
Maximum Radial Load	[N]	*8	2400							
Maximum Axial Load	[N]	*9	2200							
Moment of Inertia (≤ Ø 8)	[kgcm2]	--	0.20	0.25	0.19	0.19	0.24	0.12	0.18	0.11
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	0.36	0.41	0.35	0.35	0.40	0.28	0.35	0.28
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	0.75	0.79	0.74	0.74	0.78	0.67	0.73	0.67
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	2.5	2.5	2.5	2.5	2.5	2.4	2.5	2.4
Efficiency	[%]	*10	90							
Torsional Rigidity	[Nm/arc-min]	*11	10							
Maximum Torsional Backlash	[arc-min]	--	≤ 5							
Noise Level	dB [A]	*12	≤ 67							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	4							

VRL 090 2-Stage Specifications

Frame Size			**090**						
Ratio	Unit	Note	45	50	60	70	80	90	100
Nominal Output Torque	[Nm]	*1	88	118	118	118	118	88	88
Maximum Acceleration Torque	[Nm]	*2	112	165	165	165	165	112	112
Maximum Torque	[Nm]	*3	112	165	165	165	165	112	112
Emergency Stop Torque	[Nm]	*4	200	250	250	250	250	200	200
Nominal Input Speed	[rpm]	*5	3500	3800	3800	4500	4500	4500	4500
Maximum Input Speed	[rpm]	*6	8500	8500	8500	8500	8500	8500	8500
No Load Running Torque	[Nm]	*7	0.06						
Maximum Radial Load	[N]	*8	2400						
Maximum Axial Load	[N]	*9	2200						
Moment of Inertia (≤ Ø 8)	[kgcm2]	--	0.18	0.11	0.11	0.11	0.11	0.11	0.11
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	0.34	0.27	0.27	0.27	0.27	0.27	0.27
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	0.73	0.67	0.67	0.67	0.67	0.67	0.67
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	2.5	2.4	2.4	2.4	2.4	2.4	2.4
Efficiency	[%]	*10	90						
Torsional Rigidity	[Nm/arc-min]	*11	10						
Maximum Torsional Backlash	[arc-min]	--	≤ 5						
Noise Level	dB [A]	*12	≤ 67						
Protection Class	--	*13	IP54 (IP65)						
Ambient Temperature	[°C]	--	0-40						
Permitted Housing Temperature	[°C]	--	90						
Weight	[kg]	*14	4						

*1) At nominal input speed, service life is 20,000 hours

*2) The maximum torque when starting or stopping operation. Permitted 100,000 times during service life

*3) Permitted 10,000 times during service life. Based on 10% of maximum radial load and smooth output shaft

*4) The maximum torque allowed under a stress situation. Permitted 1,000 times during service life

*5) The average input speed at nominal input torque. Maintain housing temperature below permitted value

*6) The maximum intermittent input speed

*7) Torque at no load applied to the input shaft at nominal input speed

*8) The maximum radial load that the gearbox can accept

*9) The maximum axial load that the gearbox can accept

*10) The efficiency at the nominal output torque rating

*11) This does not include lost motion

*12) Contact NIDEC-SHIMPO for the testing conditions and environment

*13) IP65 (wash-down) is available as an option. Contact NIDEC-SHIMPO for more details

*14) Weight may vary slightly between models

VRL 090 1-Stage Dimensions

Input bore size ≦φ14 mm

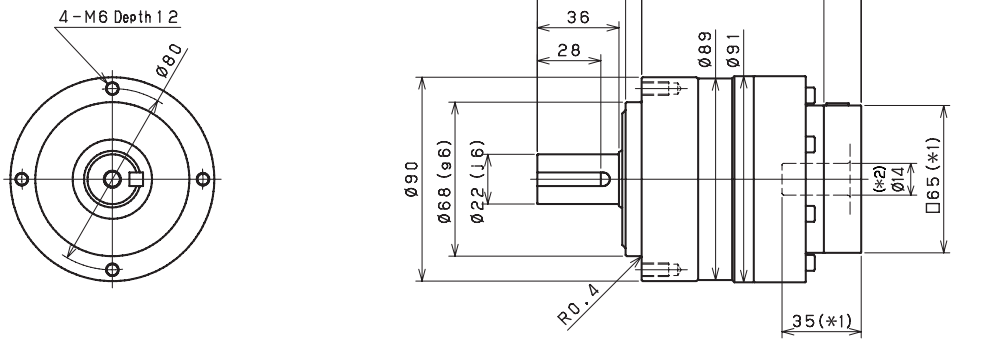

Input bore size ≦φ19 mm

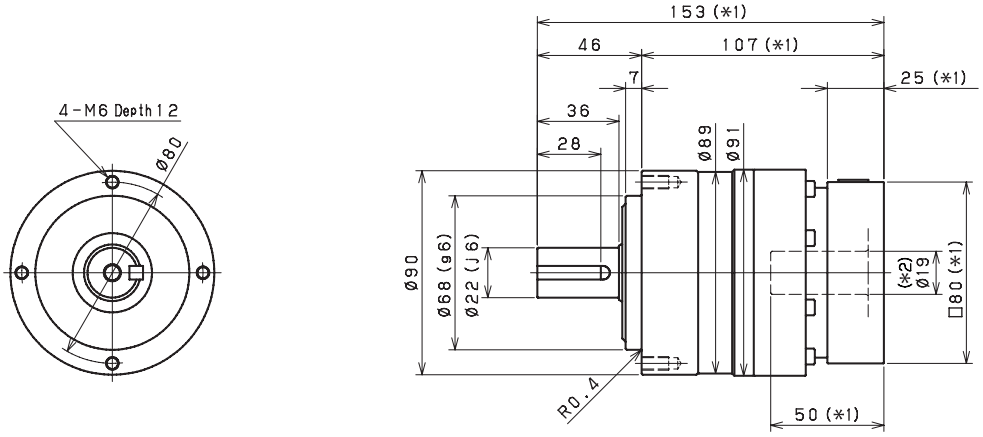

Input bore size ≦φ28 mm

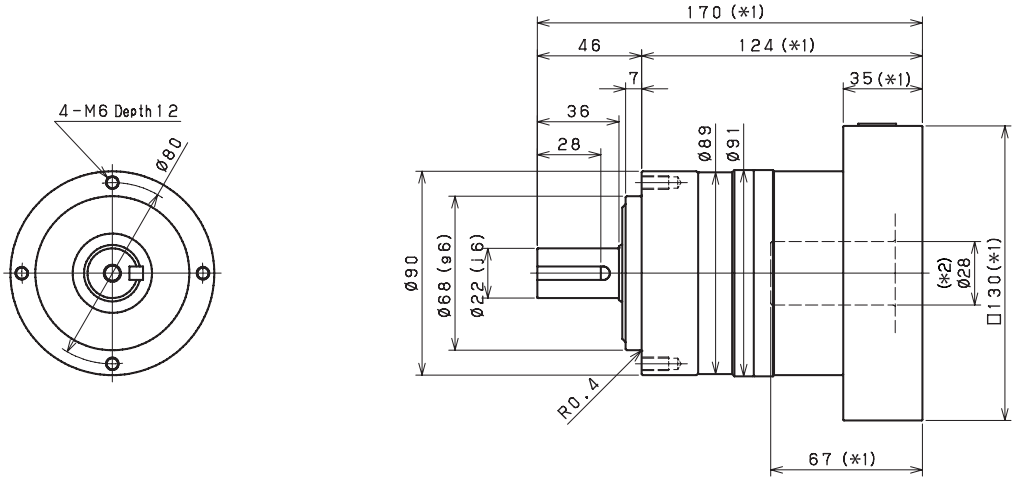

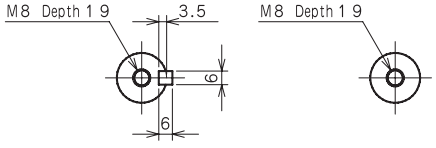

Keyed shaft Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

VRL 090 2-Stage Dimensions

Input bore size ≦φ8 mm

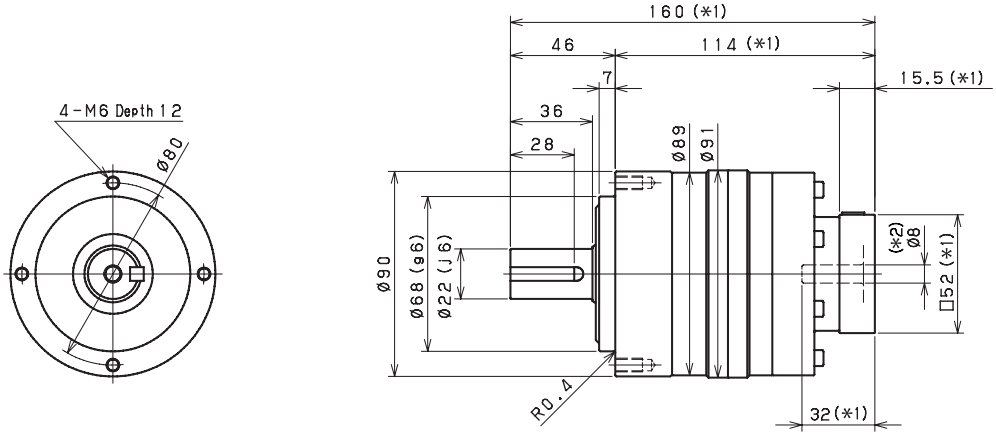

Input bore size ≦φ14 mm

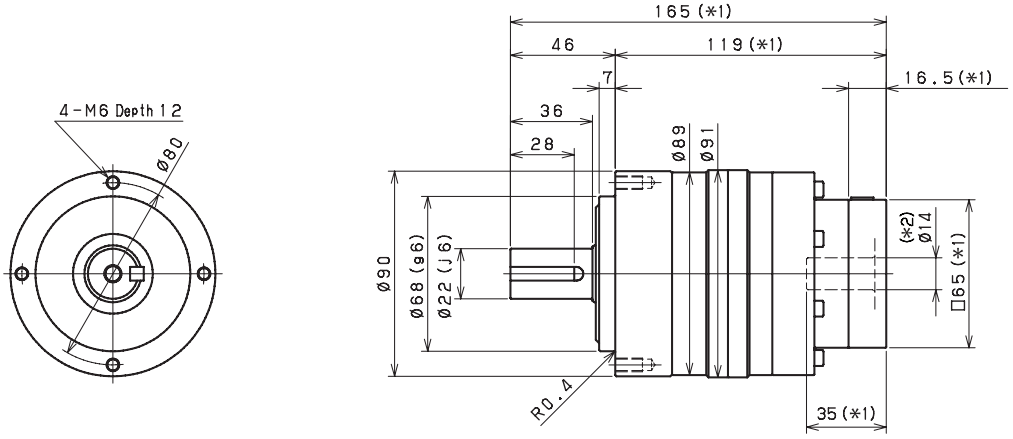

Input bore size ≦φ19 mm (*3)

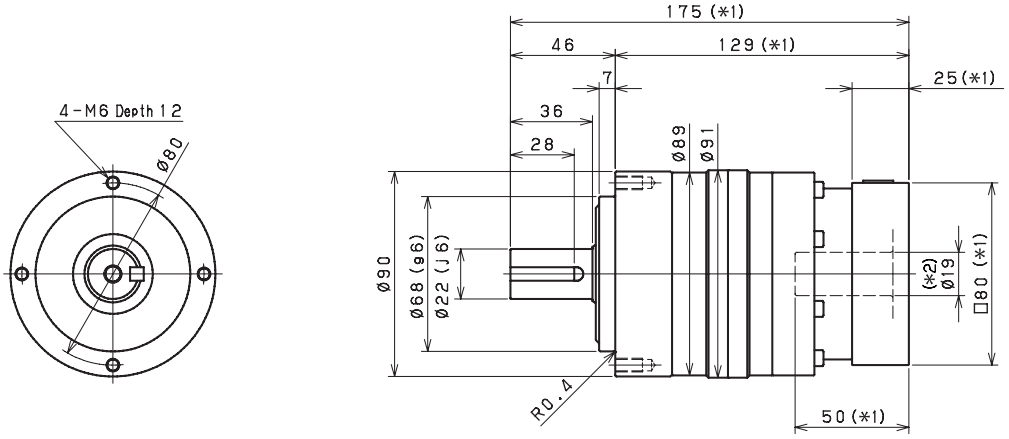

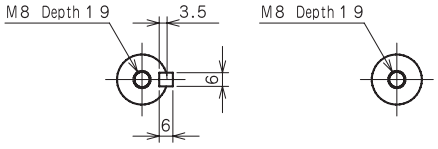

Keyed shaft Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

*3) 28mm input bore is available for this frame size. Use our online configurator to make your selection or contact us for assistance

VRL 120 1-Stage Specifications

Frame Size			**120**							
Ratio	Unit	Note	3	4	5	6	7	8	9	10
Nominal Output Torque	[Nm]	*1	128	146	190	190	190	190	190	190
Maximum Acceleration Torque	[Nm]	*2	270	390	390	390	390	390	292	292
Maximum Torque	[Nm]	*3	340	490	490	480	480	480	370	370
Emergency Stop Torque	[Nm]	*4	500	625	625	625	625	625	500	500
Nominal Input Speed	[rpm]	*5	2800	2800	2800	2800	2800	2800	2800	2800
Maximum Input Speed	[rpm]	*6	5500	5500	5500	5500	5500	5500	5500	5500
No Load Running Torque	[Nm]	*7	1.30							
Maximum Radial Load	[N]	*8	4300							
Maximum Axial Load	[N]	*9	3900							
Moment of Inertia (≤ Ø 8)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	3.2	2.0	1.4	1.2	1.0	0.92	0.86	0.83
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	5.1	3.7	3.1	2.9	2.8	2.7	2.6	2.6
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	12	10	9.5	9.3	9.1	9	8.9	8.9
Efficiency	[%]	*10	95							
Torsional Rigidity	[Nm/arc-min]	*11	31							
Maximum Torsional Backlash	[arc-min]	--	≤ 5							
Noise Level	dB [A]	*13	≤ 71							
Protection Class	*15	--	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	*13	90							
Weight	[kg]	*14	7.8							

VRL 120 2-Stage Specifications

Frame Size			**120**							
Ratio	Unit	Note	15	16	20	25	28	30	35	40
Nominal Output Torque	[Nm]	*1	174	200	220	280	280	220	280	270
Maximum Acceleration Torque	[Nm]	*2	270	390	390	390	390	270	390	390
Maximum Torque	[Nm]	*3	270	390	390	390	390	270	390	390
Emergency Stop Torque	[Nm]	*4	500	625	625	625	625	500	625	625
Nominal Input Speed	[rpm]	*5	3100	3100	3100	3100	3100	3100	3100	3100
Maximum Input Speed	[rpm]	*6	6500	6500	6500	6500	6500	6500	6500	6500
No Load Running Torque	[Nm]	*7	0.42							
Maximum Radial Load	[N]	*8	4300							
Maximum Axial Load	[N]	*9	3900							
Moment of Inertia (≤ Ø 8)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	0.77	0.98	0.72	0.70	0.92	0.38	0.68	0.37
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	1.2	1.4	1.1	1.1	1.3	0.78	1.1	0.77
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	2.9	3.1	2.8	2.8	3	2.5	2.8	2.5
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	9.2	9.4	9.1	9.1	9.3	8.8	9.1	8.8
Efficiency	[%]	*10	90							
Torsional Rigidity	[Nm/arc-min]	*11	31							
Maximum Torsional Backlash	[arc-min]	--	≤ 5							
Noise Level	dB [A]	*13	≤ 71							
Protection Class	*15	--	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	*13	90							
Weight	[kg]	*14	8.7							

VRL 120 2-Stage Specifications

Frame Size			**120**						
Ratio	Unit	Note	45	50	60	70	80	90	100
Nominal Output Torque	[Nm]	*1	220	280	280	280	280	220	220
Maximum Acceleration Torque	[Nm]	*2	292	390	390	390	390	292	292
Maximum Torque	[Nm]	*3	292	390	390	390	390	292	292
Emergency Stop Torque	[Nm]	*4	500	625	625	625	625	500	500
Nominal Input Speed	[rpm]	*5	3100	3500	3500	4200	4200	4200	4200
Maximum Input Speed	[rpm]	*6	6500	6500	6500	6500	6500	6500	6500
No Load Running Torque	[Nm]	*7	0.42						
Maximum Radial Load	[N]	*8	4300						
Maximum Axial Load	[N]	*9	3900						
Moment of Inertia (≤ Ø 8)	[kgcm2]	--	--	0.19	0.19	0.19	0.19	0.19	0.19
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	0.68	0.36	0.36	0.36	0.36	0.36	0.36
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	1.1	0.76	0.76	0.76	0.76	0.76	0.76
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	2.8	2.5	2.5	2.5	2.5	2.5	2.5
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	9.1	8.8	8.8	8.8	8.8	8.8	8.8
Efficiency	[%]	*10	90						
Torsional Rigidity	[Nm/arc-min]	*11	31						
Maximum Torsional Backlash	[arc-min]	--	≤ 5						
Noise Level	dB [A]	*13	≤ 71						
Protection Class	*15	--	IP54 (IP65)						
Ambient Temperature	[°C]	--	0-40						
Permitted Housing Temperature	[°C]	*13	90						
Weight	[kg]	*14	8.7						

*1) At nominal input speed, service life is 20,000 hours

*2) The maximum torque when starting or stopping operation. Permitted 100,000 times during service life

*3) Permitted 10,000 times during service life. Based on 10% of maximum radial load and smooth output shaft

*4) The maximum torque allowed under a stress situation. Permitted 1,000 times during service life

*5) The average input speed at nominal input torque. Maintain housing temperature below permitted value

*6) The maximum intermittent input speed

*7) Torque at no load applied to the input shaft at nominal input speed

*8) The maximum radial load that the gearbox can accept

*9) The maximum axial load that the gearbox can accept

*10) The efficiency at the nominal output torque rating

*11) This does not include lost motion

*12) Contact NIDEC-SHIMPO for the testing conditions and environment

*13) IP65 (wash-down) is available as an option. Contact NIDEC-SHIMPO for more details

*14) Weight may vary slightly between models

VRL 120 1-Stage Dimensions

Input bore size ≦φ19 mm

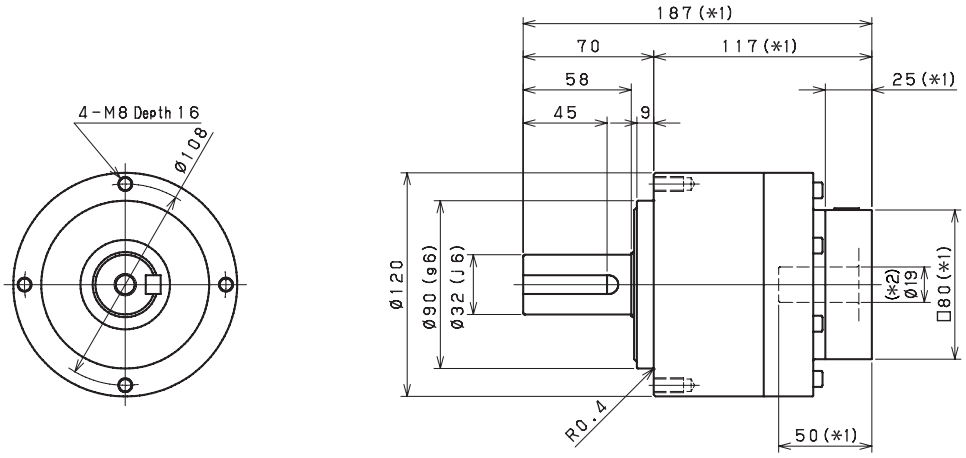

Input bore size ≦φ28 mm

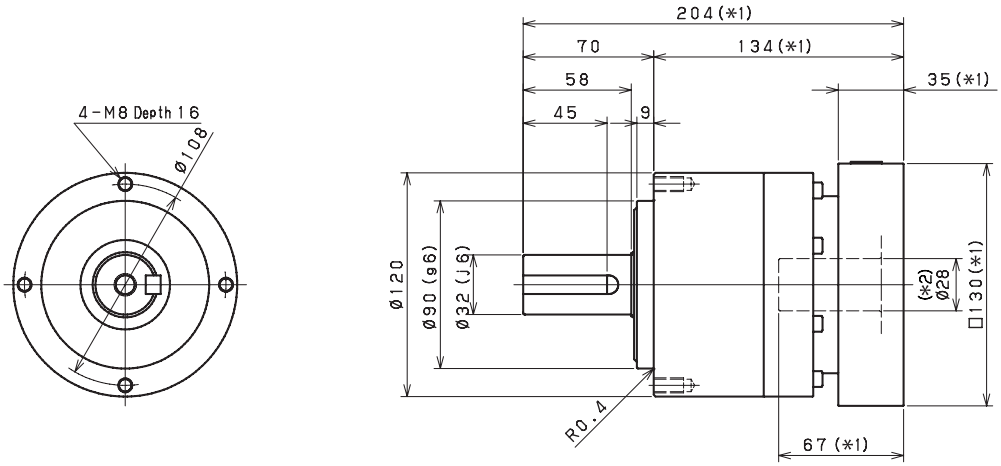

Input bore size ≦φ38 mm

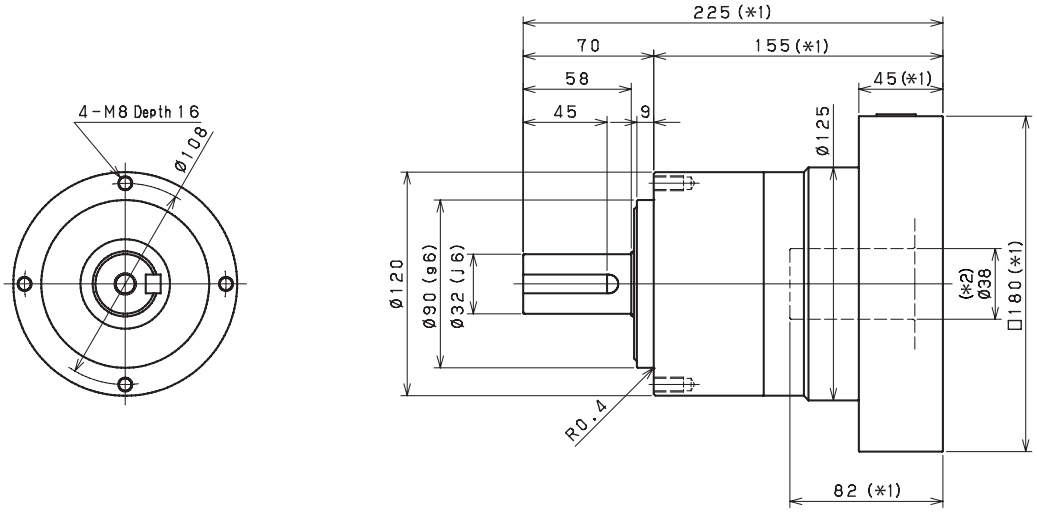

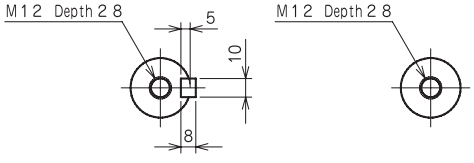

Keyed shaft Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

VRL 120 2-Stage Dimensions

Input bore size ≦φ14 mm

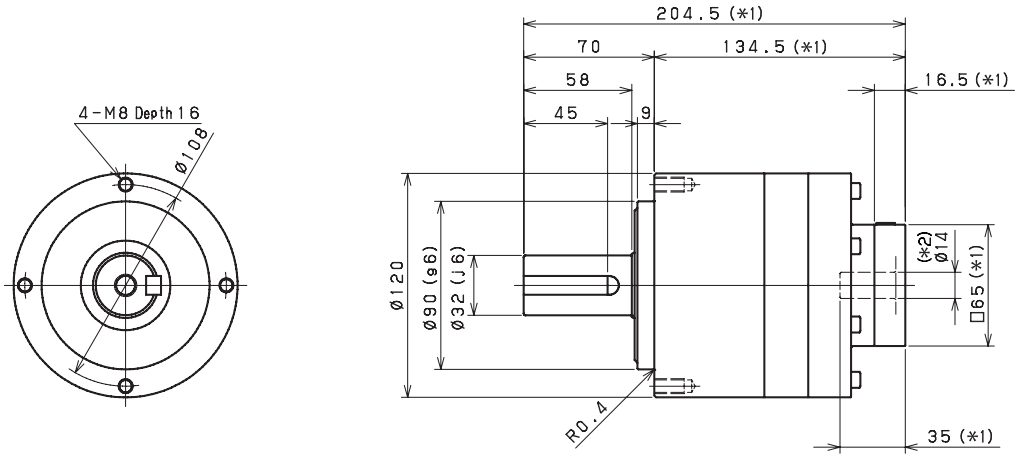

Input bore size ≦φ19 mm

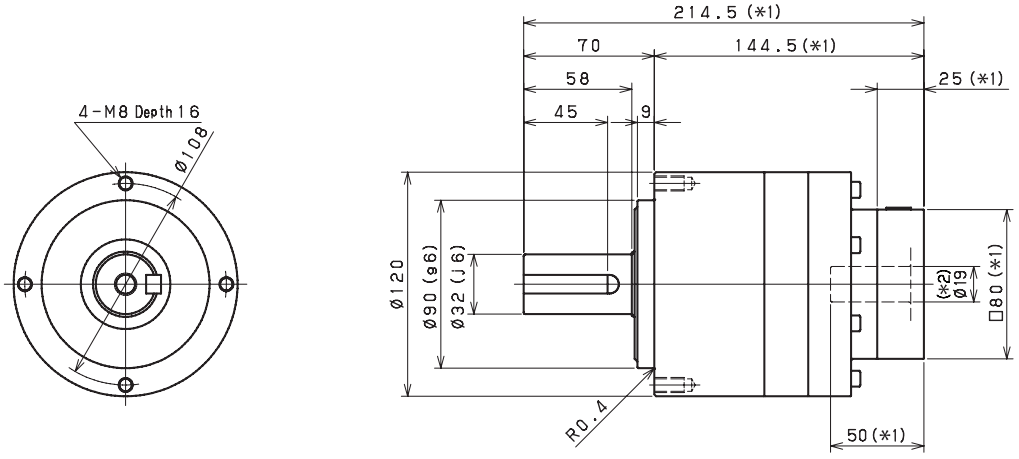

Input bore size ≦φ28 mm (*3)

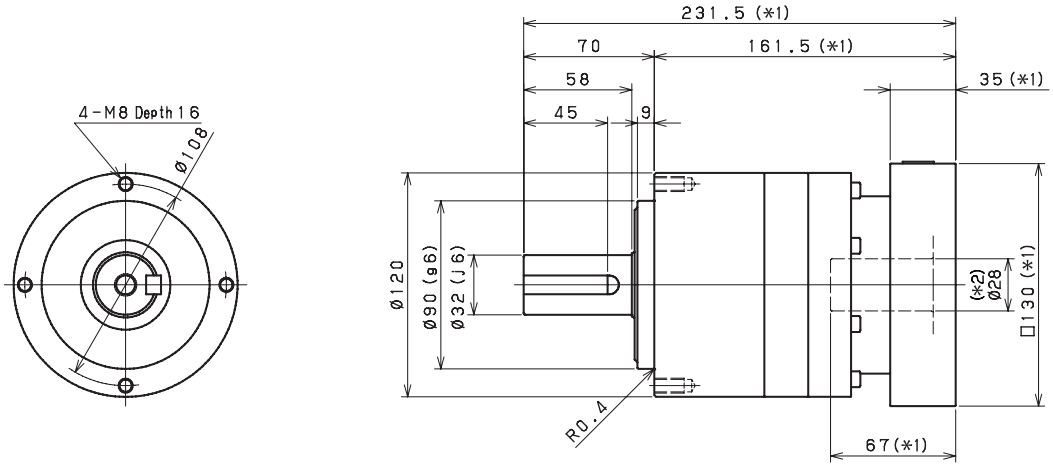

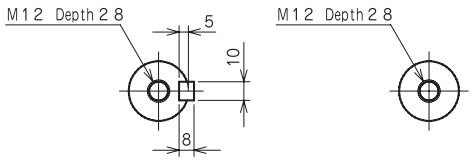

Keyed shaft Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

*3) 38mm input bore is available for this frame size. Use our online configurator to make your selection or contact us for assistance

VRL 155 1-Stage Specifications

Frame Size			**155**							
Ratio	Unit	Note	3	4	5	6	7	8	9	10
Nominal Output Torque	[Nm]	*1	248	280	380	380	380	380	380	380
Maximum Acceleration Torque	[Nm]	*2	560	840	840	840	840	840	610	610
Maximum Torque	[Nm]	*3	630	1000	1000	950	950	950	730	730
Emergency Stop Torque	[Nm]	*4	1000	1250	1250	1250	1250	1250	1000	1000
Nominal Input Speed	[rpm]	*5	2100	2100	2100	2100	2600	2600	2600	2600
Maximum Input Speed	[rpm]	*6	5000	5000	5000	5000	5000	5000	5000	5000
No Load Running Torque	[Nm]	*7	1.63							
Maximum Radial Load	[N]	*8	9100							
Maximum Axial Load	[N]	*9	8200							
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	12	7.3	5.3	4.3	3.9	3.5	3.3	3.2
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	18	14	12	11	10	9.9	9.7	9.6
Moment of Inertia (≤ Ø 48)	[kgcm2]	--	35	29	27	26	25	25	25	25
Efficiency	[%]	*10	95							
Torsional Rigidity	[Nm/arc-min]	*11	60							
Maximum Torsional Backlash	[arc-min]	--	≤ 5							
Noise Level	dB [A]	*12	≤ 67							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	16							

VRL 155 2-Stage Specifications

Frame Size			**155**							
Ratio	Unit	Note	15	16	20	25	28	30	35	40
Nominal Output Torque	[Nm]	*1	360	380	410	590	590	440	590	500
Maximum Acceleration Torque	[Nm]	*2	560	840	840	840	840	560	840	840
Maximum Torque	[Nm]	*3	560	840	840	840	840	560	840	840
Emergency Stop Torque	[Nm]	*4	1000	1250	1250	1250	1250	1000	1250	1250
Nominal Input Speed	[rpm]	*5	2900	2900	2900	2900	2900	2900	2900	2900
Maximum Input Speed	[rpm]	*6	6000	6000	6000	6000	6000	6000	6000	6000
No Load Running Torque	[Nm]	*7	0.56							
Maximum Radial Load	[N]	*8	9100							
Maximum Axial Load	[N]	*9	8200							
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	2.6	3.5	2.4	2.4	3.3	1.1	2.3	1.1
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	4.4	5.3	4.2	4.1	5.1	2.9	4.1	2.8
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	11	12	10	10	11	9.2	10	9.1
Moment of Inertia (≤ Ø 48)	[kgcm2]	--	26	27	25	25	26	24	25	24
Efficiency	[%]	*10	90							
Torsional Rigidity	[Nm/arc-min]	*11	60							
Maximum Torsional Backlash	[arc-min]	--	≤ 5							
Noise Level	dB [A]	*12	≤ 67							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	18							

VRL 155 2-Stage Specifications

Frame Size			**155**						
Ratio	Unit	Note	45	50	60	70	80	90	100
Nominal Output Torque	[Nm]	*1	440	590	590	590	590	440	440
Maximum Acceleration Torque	[Nm]	*2	610	840	840	840	840	610	610
Maximum Torque	[Nm]	*3	610	840	840	840	840	610	610
Emergency Stop Torque	[Nm]	*4	1000	1250	1250	1250	1250	1000	1000
Nominal Input Speed	[rpm]	*5	2900	3200	3200	3900	3900	3900	3900
Maximum Input Speed	[rpm]	*6	6000	6000	6000	6000	6000	6000	6000
No Load Running Torque	[Nm]	*7	0.56						
Maximum Radial Load	[N]	*8	9100						
Maximum Axial Load	[N]	*9	8200						
Moment of Inertia (≤ Ø 14)	[kgcm2]	--	--	0.65	0.64	0.64	0.63	0.63	0.63
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	2.3	1.1	1.1	1.1	1.1	1.1	1.1
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	4.0	2.8	2.8	2.8	2.8	2.8	2.8
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	10	9.1	9.1	9.1	9.1	9.1	9.1
Moment of Inertia (≤ Ø 48)	[kgcm2]	--	25	24	24	24	24	24	24
Efficiency	[%]	*10	90						
Torsional Rigidity	[Nm/arc-min]	*11	60						
Maximum Torsional Backlash	[arc-min]	--	≤ 5						
Noise Level	dB [A]	*12	≤ 67						
Protection Class	--	*13	IP54 (IP65)						
Ambient Temperature	[°C]	--	0-40						
Permitted Housing Temperature	[°C]	--	90						
Weight	[kg]	*14	18						

*1) At nominal input speed, service life is 20,000 hours

*2) The maximum torque when starting or stopping operation. Permitted 100,000 times during service life

*3) Permitted 10,000 times during service life. Based on 10% of maximum radial load and smooth output shaft

*4) The maximum torque allowed under a stress situation. Permitted 1,000 times during service life

*5) The average input speed at nominal input torque. Maintain housing temperature below permitted value

*6) The maximum intermittent input speed

*7) Torque at no load applied to the input shaft at nominal input speed

*8) The maximum radial load that the gearbox can accept

*9) The maximum axial load that the gearbox can accept

*10) The efficiency at the nominal output torque rating

*11) This does not include lost motion

*12) Contact NIDEC-SHIMPO for the testing conditions and environment

*13) IP65 (wash-down) is available as an option. Contact NIDEC-SHIMPO for more details

*14) Weight may vary slightly between models

VRL 155 1-Stage Dimensions

Input bore size ≦φ28 mm

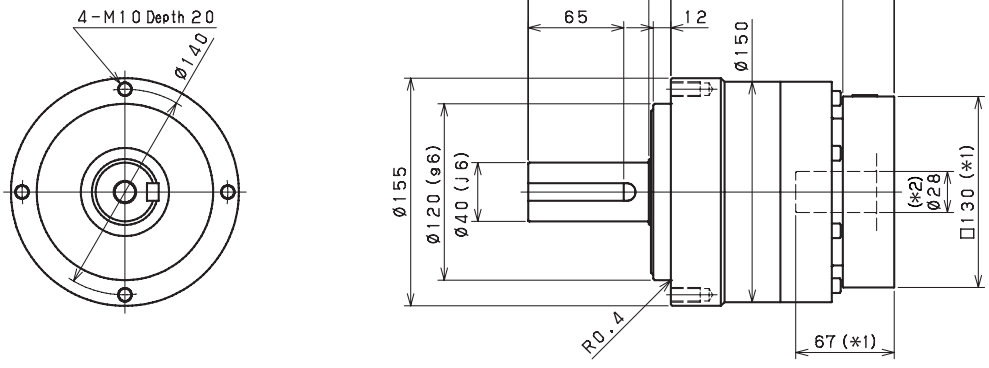

Input bore size ≦φ38 mm

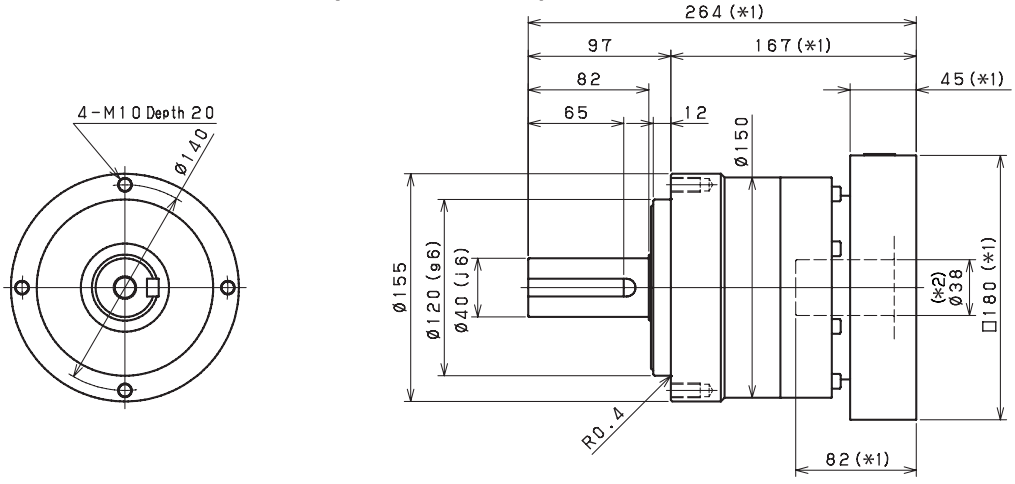

Input bore size ≦φ48 mm

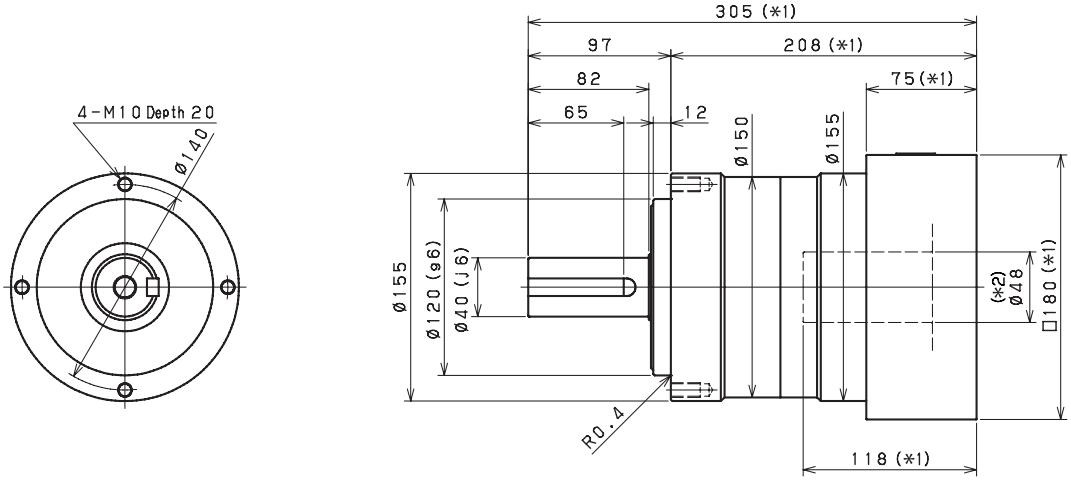

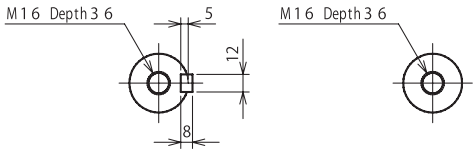

Keyed shaft Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

VRL 155 2-Stage Dimensions

Input bore size ≦φ19 mm

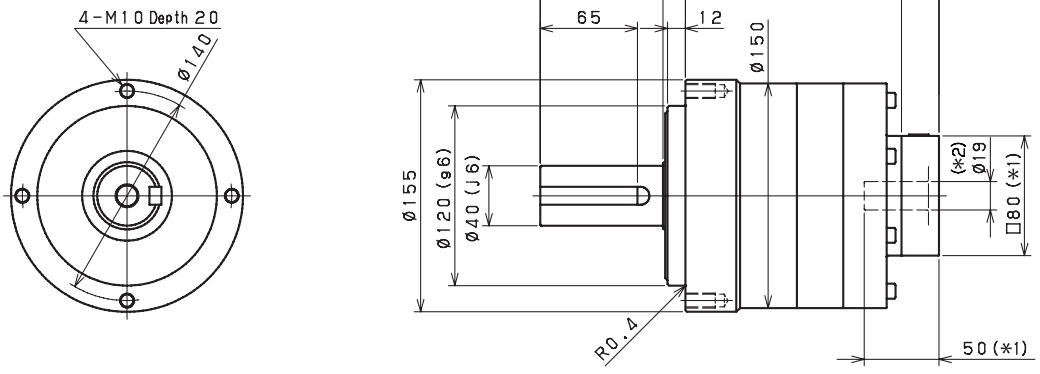

Input bore size ≦φ28 mm

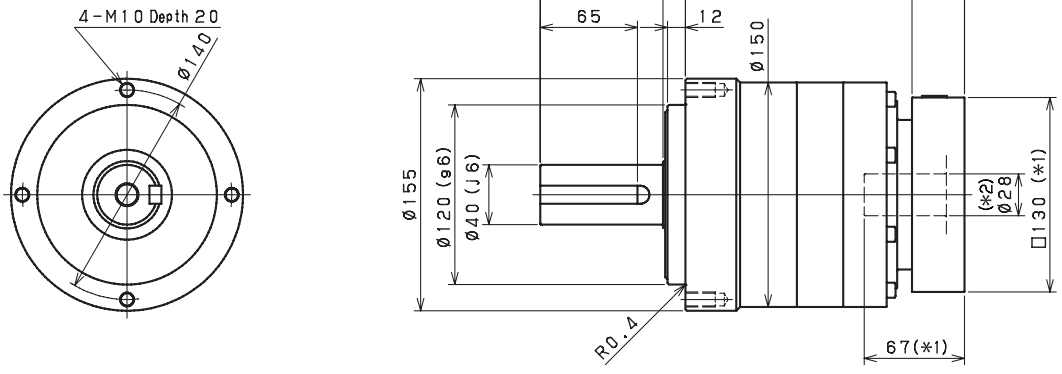

Input bore size ≦φ38 mm (*3)

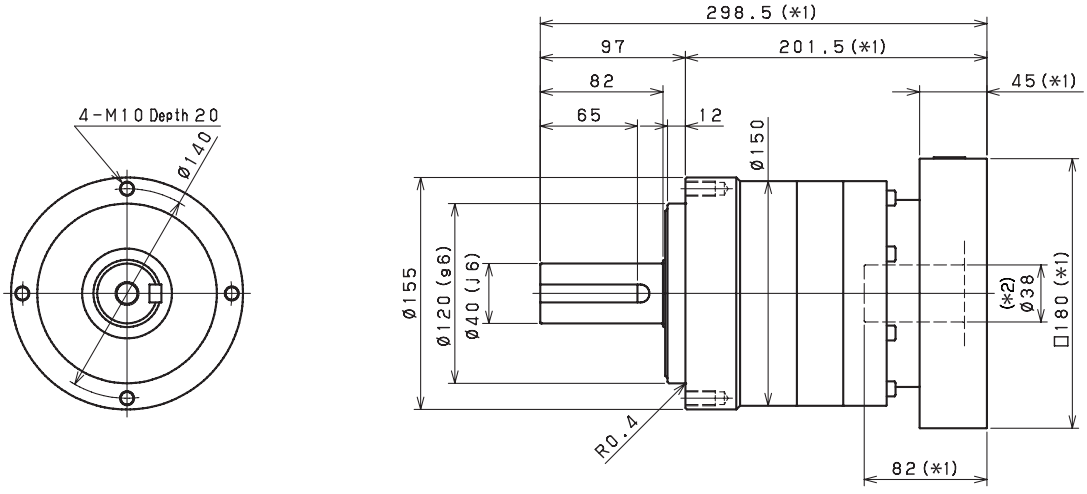

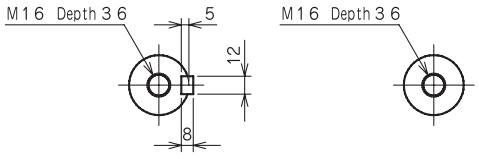

Keyed shaft Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

*3) 48mm input bore is available for this frame size. Use our online configurator to make your selection or contact us for assistance

VRL 205 1-Stage Specifications

Frame Size			**205**							
Ratio	Unit	Note	3	4	5	6	7	8	9	10
Nominal Output Torque	[Nm]	*1	570	850	910	910	910	910	910	910
Maximum Acceleration Torque	[Nm]	*2	1300	1850	1850	1850	1850	1850	1350	1350
Maximum Torque	[Nm]	*3	1450	2250	2250	2150	2150	2150	1750	1750
Emergency Stop Torque	[Nm]	*4	2200	2750	2750	2750	2750	2750	2200	2200
Nominal Input Speed	[rpm]	*5	1500	1500	1500	1500	2300	2300	2300	2300
Maximum Input Speed	[rpm]	*6	4500	4500	4500	4500	4500	4500	4500	4500
No Load Running Torque	[Nm]	*7	2.68							
Maximum Radial Load	[N]	*8	15000							
Maximum Axial Load	[N]	*9	14000							
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	43	26	19	15	14	13	12	12
Moment of Inertia (≤ Ø 48)	[kgcm2]	--	57	41	34	31	29	28	27	27
Moment of Inertia (≤ Ø 65)	[kgcm2]	--	110	85	78	75	73	72	71	71
Efficiency	[%]	*10	95							
Torsional Rigidity	[Nm/arc-min]	*11	175							
Maximum Torsional Backlash	[arc-min]	--	≤ 5							
Noise Level	dB [A]	*12	≤ 67							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	39							

VRL 205 2-Stage Specifications

Frame Size			**205**							
Ratio	Unit	Note	15	16	20	25	28	30	35	40
Nominal Output Torque	[Nm]	*1	660	850	910	1100	1300	930	1300	1200
Maximum Acceleration Torque	[Nm]	*2	1300	1850	1850	1850	1850	1300	1850	1850
Maximum Torque	[Nm]	*3	1300	1850	1850	1850	1850	1300	1850	1850
Emergency Stop Torque	[Nm]	*4	2200	2750	2750	2750	2750	2200	2750	2750
Nominal Input Speed	[rpm]	*5	2700	2700	2700	2700	2700	2700	2700	2700
Maximum Input Speed	[rpm]	*6	5000	5000	5000	5000	5000	5000	5000	5000
No Load Running Torque	[Nm]	*7	1.39							
Maximum Radial Load	[N]	*8	15000							
Maximum Axial Load	[N]	*9	14000							
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	8.8	11	8.1	7.9	11	4.0	7.6	3.9
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	15	18	14	14	17	10	14	10
Moment of Inertia (≤ Ø 48)	[kgcm2]	--	30	33	29	29	32	25	29	25
Moment of Inertia (≤ Ø 65)	[kgcm2]	--	--	--	--	--	--	--	--	--
Efficiency	[%]	*10	90							
Torsional Rigidity	[Nm/arc-min]	*11	175							
Maximum Torsional Backlash	[arc-min]	--	≤ 5							
Noise Level	dB [A]	*12	≤ 67							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	40							

VRL 205 2-Stage Specifications

Frame Size			**205**						
Ratio	Unit	Note	45	50	60	70	80	90	100
Nominal Output Torque	[Nm]	*1	930	1300	1300	1300	1300	930	930
Maximum Acceleration Torque	[Nm]	*2	1350	1850	1850	1850	1850	1350	1350
Maximum Torque	[Nm]	*3	1350	1850	1850	1850	1850	1350	1350
Emergency Stop Torque	[Nm]	*4	2200	2750	2750	2750	2750	2200	2200
Nominal Input Speed	[rpm]	*5	2700	2900	2900	3400	3400	3400	3400
Maximum Input Speed	[rpm]	*6	5000	5000	5000	5000	5000	5000	5000
No Load Running Torque	[Nm]	*7	1.39						
Maximum Radial Load	[N]	*8	15000						
Maximum Axial Load	[N]	*9	14000						
Moment of Inertia (≤ Ø 19)	[kgcm2]	--	--	1.9	1.9	1.8	1.8	1.8	1.8
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	7.6	3.8	3.8	3.8	3.7	3.7	3.7
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	14	10	10	10	10	10	10
Moment of Inertia (≤ Ø 48)	[kgcm2]	--	29	25	25	25	25	25	25
Moment of Inertia (≤ Ø 65)	[kgcm2]	--	--	--	--	--	--	--	--
Efficiency	[%]	*10	90						
Torsional Rigidity	[Nm/arc-min]	*11	175						
Maximum Torsional Backlash	[arc-min]	--	≤ 5						
Noise Level	dB [A]	*12	≤ 67						
Protection Class	--	*13	IP54 (IP65)						
Ambient Temperature	[°C]	--	0-40						
Permitted Housing Temperature	[°C]	--	90						
Weight	[kg]	*14	40						

*1) At nominal input speed, service life is 20,000 hours

*2) The maximum torque when starting or stopping operation. Permitted 100,000 times during service life

*3) Permitted 10,000 times during service life. Based on 10% of maximum radial load and smooth output shaft

*4) The maximum torque allowed under a stress situation. Permitted 1,000 times during service life

*5) The average input speed at nominal input torque. Maintain housing temperature below permitted value

*6) The maximum intermittent input speed

*7) Torque at no load applied to the input shaft at nominal input speed

*8) The maximum radial load that the gearbox can accept

*9) The maximum axial load that the gearbox can accept

*10) The efficiency at the nominal output torque rating

*11) This does not include lost motion

*12) Contact NIDEC-SHIMPO for the testing conditions and environment

*13) IP65 (wash-down) is available as an option. Contact NIDEC-SHIMPO for more details

*14) Weight may vary slightly between models

VRL 205 1-Stage Dimensions

Input bore size ≦φ38 mm

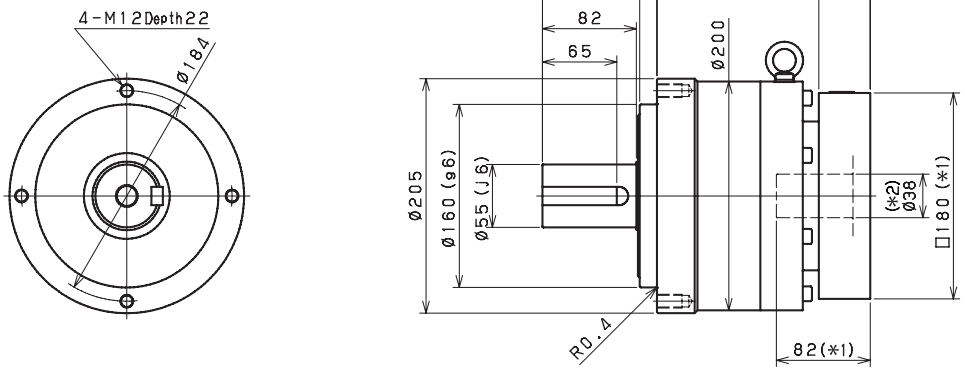

Input bore size ≦φ48 mm

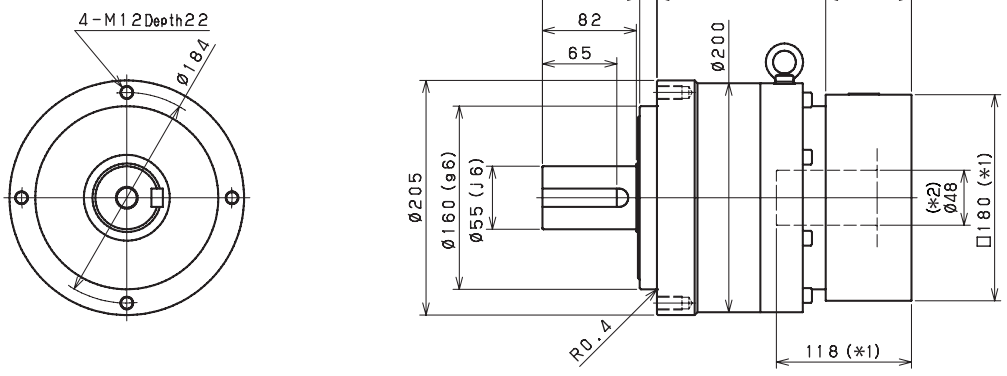

Input bore size ≦φ65 mm

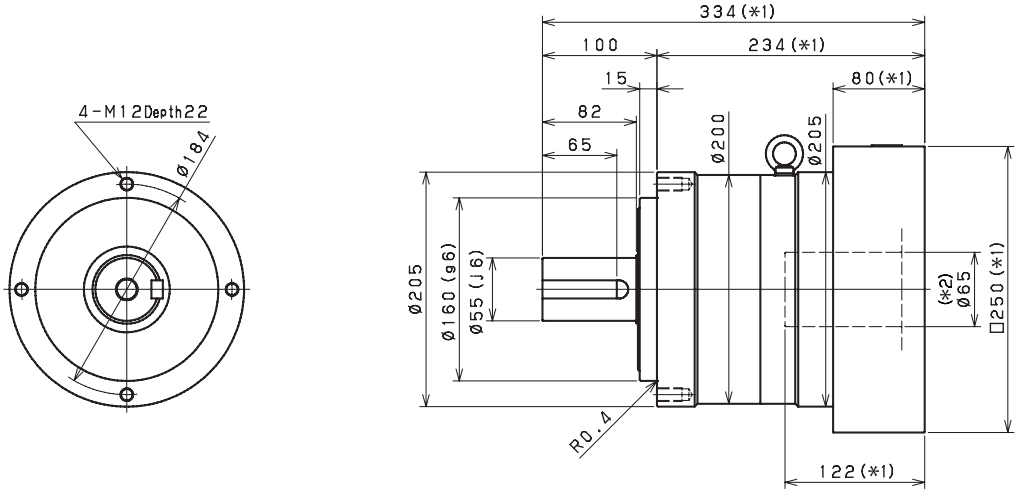

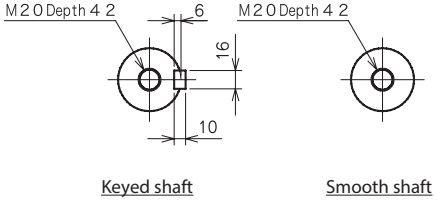

Keyed shaft Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

VRL 205 2-Stage Dimensions

Input bore size ≦φ28 mm

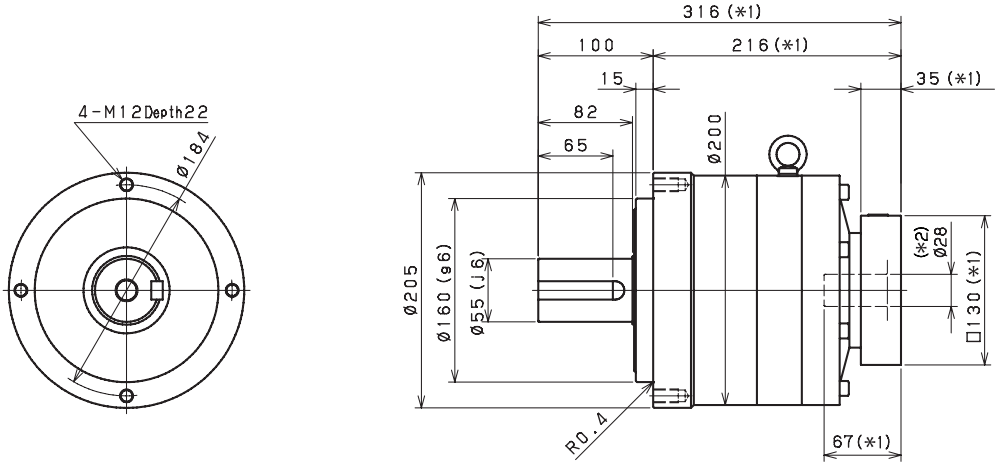

Input bore size ≦φ38 mm

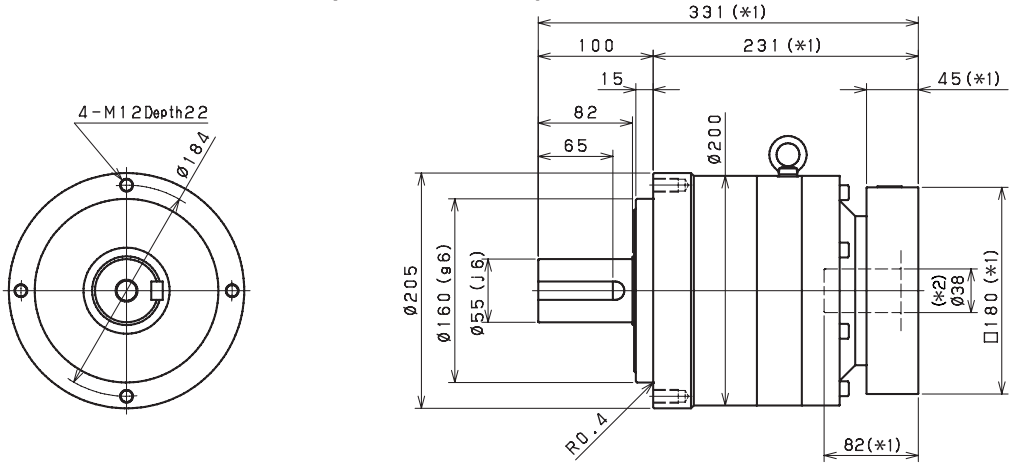

Input bore size ≦φ48 mm

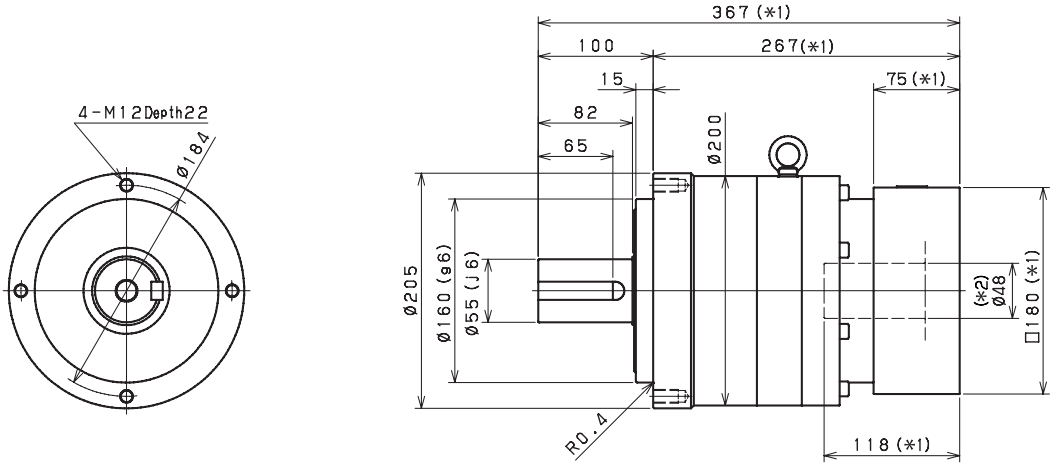

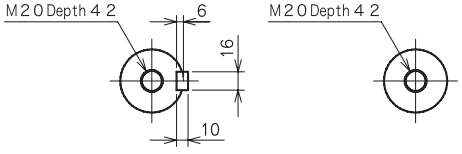

Keyed shaft Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

VRL 235 1-Stage Specifications

Frame Size			**235**							
Ratio	Unit	Note	3	4	5	6	7	8	9	10
Nominal Output Torque	[Nm]	*1	980	1400	1400	1600	1700	1700	1700	1700
Maximum Acceleration Torque	[Nm]	*2	2000	2900	2900	2900	2900	2900	2600	2200
Maximum Torque	[Nm]	*3	2400	3700	3700	3500	3500	3400	3000	2700
Emergency Stop Torque	[Nm]	*4	4000	5000	5000	5000	5000	5000	4000	4000
Nominal Input Speed	[rpm]	*5	1200	1200	1500	1500	1700	1700	2000	2000
Maximum Input Speed	[rpm]	*6	3000	3000	3000	3000	3000	3000	3000	3000
No Load Running Torque	[Nm]	*7	2.92							
Maximum Radial Load	[N]	*8	15000							
Maximum Axial Load	[N]	*9	14000							
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 48)	[kgcm2]	--	110	54	42	35	33	30	29	28
Moment of Inertia (≤ Ø 65)	[kgcm2]	--	160	98	85	79	76	74	73	72
Efficiency	[%]	*10	95							
Torsional Rigidity	[Nm/arc-min]	*11	400							
Maximum Torsional Backlash	[arc-min]	--	≤ 5							
Noise Level	dB [A]	*12	≤ 61							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	55							

VRL 235 2-Stage Specifications

Frame Size			**235**							
Ratio	Unit	Note	15	16	20	25	28	30	35	40
Nominal Output Torque	[Nm]	*1	1100	1400	1500	1800	2000	1300	2000	2000
Maximum Acceleration Torque	[Nm]	*2	2000	2900	2900	2900	2900	2000	2900	2900
Maximum Torque	[Nm]	*3	2000	2900	2900	2900	2900	2000	2900	2900
Emergency Stop Torque	[Nm]	*4	4000	5000	5000	5000	5000	4000	5000	5000
Nominal Input Speed	[rpm]	*5	2200	2200	2200	2200	2200	2200	2200	2200
Maximum Input Speed	[rpm]	*6	4500	4500	4500	4500	4500	4500	4500	4500
No Load Running Torque	[Nm]	*7	1.14							
Maximum Radial Load	[N]	*8	15000							
Maximum Axial Load	[N]	*9	14000							
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	--	--	--	--	--	--	--	--
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	20	24	19	18	23	12	18	12
Moment of Inertia (≤ Ø 48)	[kgcm2]	--	34	39	33	33	37	26	32	26
Moment of Inertia (≤ Ø 65)	[kgcm2]	--	--	--	--	--	--	--	--	--
Efficiency	[%]	*10	90							
Torsional Rigidity	[Nm/arc-min]	*11	400							
Maximum Torsional Backlash	[arc-min]	--	≤ 5							
Noise Level	dB [A]	*12	≤ 61							
Protection Class	--	*13	IP54 (IP65)							
Ambient Temperature	[°C]	--	0-40							
Permitted Housing Temperature	[°C]	--	90							
Weight	[kg]	*14	57							

VRL 235 2-Stage Specifications

Frame Size	**235**								
Ratio	Unit	Note	45	50	60	70	80	90	100
Nominal Output Torque	[Nm]	*1	1300	2000	2000	2000	2000	1300	1300
Maximum Acceleration Torque	[Nm]	*2	1800	2900	2900	2900	2500	1800	1600
Maximum Torque	[Nm]	*3	1800	2900	2900	2900	2500	1800	1600
Emergency Stop Torque	[Nm]	*4	4000	5000	5000	5000	5000	4000	4000
Nominal Input Speed	[rpm]	*5	2200	2500	2500	3000	3000	3000	3000
Maximum Input Speed	[rpm]	*6	4500	4500	4500	4500	4500	4500	4500
No Load Running Torque	[Nm]	*7	1.14						
Maximum Radial Load	[N]	*8	15000						
Maximum Axial Load	[N]	*9	14000						
Moment of Inertia (≤ Ø 28)	[kgcm2]	--	--	4.7	4.7	4.6	4.6	4.6	4.6
Moment of Inertia (≤ Ø 38)	[kgcm2]	--	18	12	11	11	11	11	11
Moment of Inertia (≤ Ø 48)	[kgcm2]	--	32	26	26	26	26	26	26
Moment of Inertia (≤ Ø 65)	[kgcm2]	--	--	--	--	--	--	--	--
Efficiency	[%]	*10	90						
Torsional Rigidity	[Nm/arc-min]	*11	400						
Maximum Torsional Backlash	[arc-min]	--	≤ 5						
Noise Level	dB [A]	*12	≤ 61						
Protection Class	--	*13	IP54 (IP65)						
Ambient Temperature	[°C]	--	0-40						
Permitted Housing Temperature	[°C]	--	90						
Weight	[kg]	*14	57						

*1) At nominal input speed, service life is 20,000 hours

*2) The maximum torque when starting or stopping operation. Permitted 100,000 times during service life

*3) Permitted 10,000 times during service life. Based on 10% of maximum radial load and smooth output shaft

*4) The maximum torque allowed under a stress situation. Permitted 1,000 times during service life

*5) The average input speed at nominal input torque. Maintain housing temperature below permitted value

*6) The maximum intermittent input speed

*7) Torque at no load applied to the input shaft at nominal input speed

*8) The maximum radial load that the gearbox can accept

*9) The maximum axial load that the gearbox can accept

*10) The efficiency at the nominal output torque rating

*11) This does not include lost motion

*12) Contact NIDEC-SHIMPO for the testing conditions and environment

*13) IP65 (wash-down) is available as an option. Contact NIDEC-SHIMPO for more details

*14) Weight may vary slightly between models

VRL 235 1-Stage Dimensions

Input bore size ≦φ48 mm



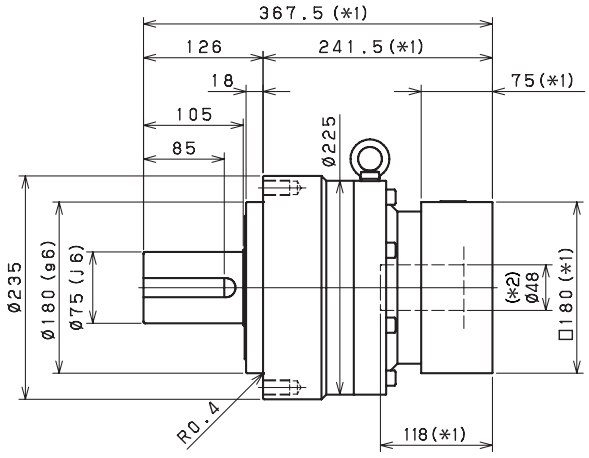

Input bore size ≦φ65 mm



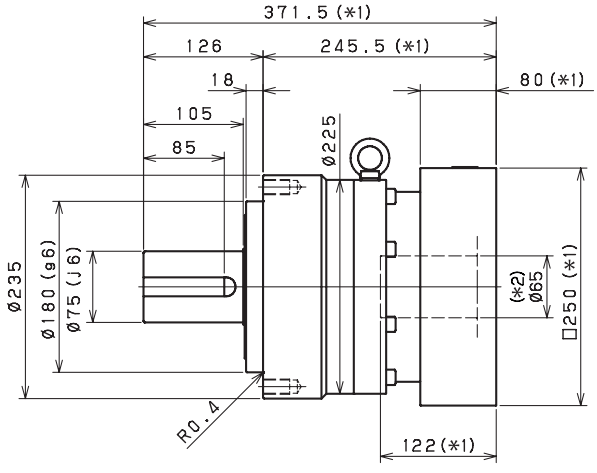

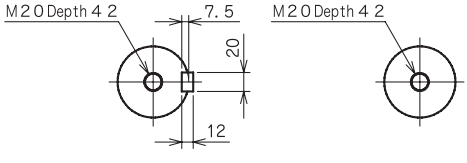

Keyed shaft Smooth shaft

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft

VRL 235 2-Stage Dimensions

Input bore size ≦φ38 mm

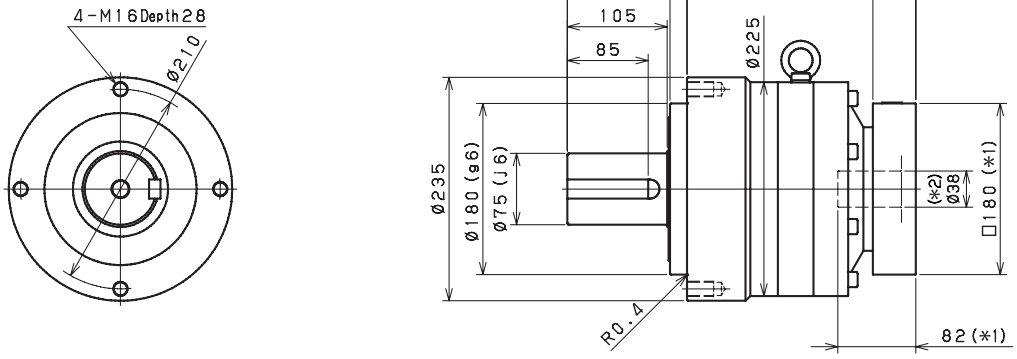

Input bore size ≦φ48 mm

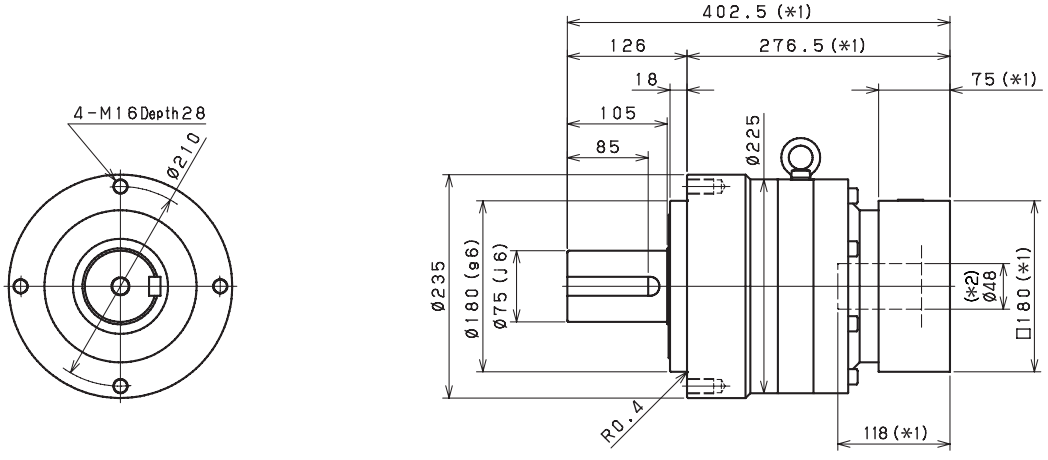

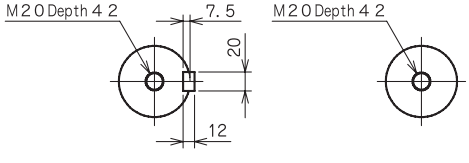

*1) Length will vary depending on motor

*2) Bushing will be inserted to adapt to motor shaft