



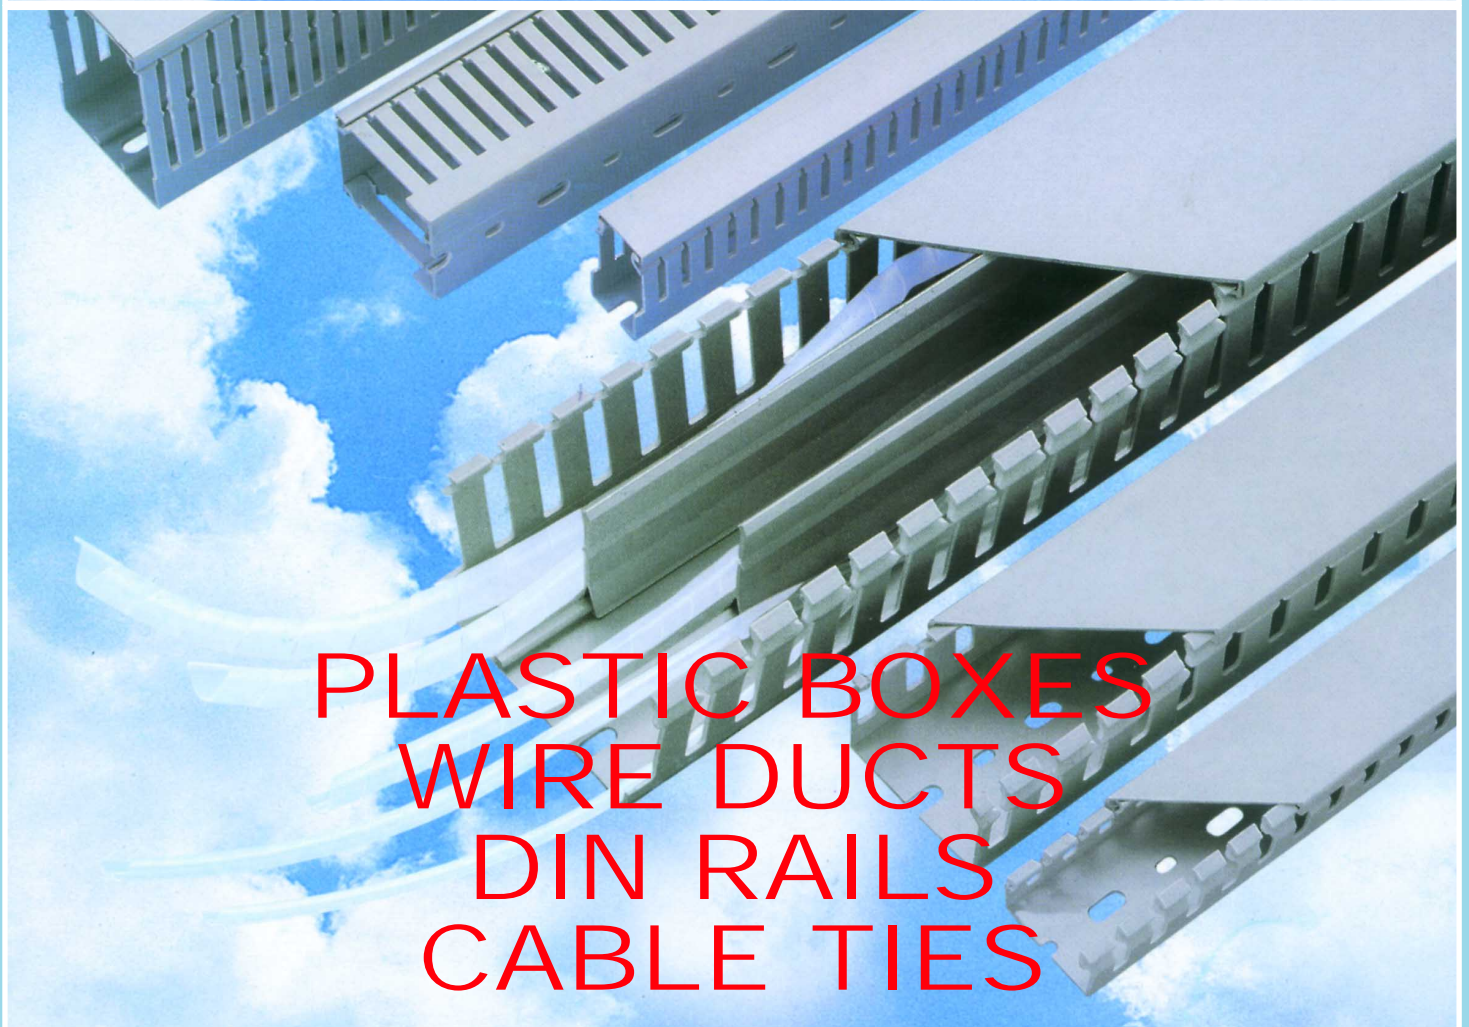

TECNOMATIC CORP.
www.tecnomatic.com

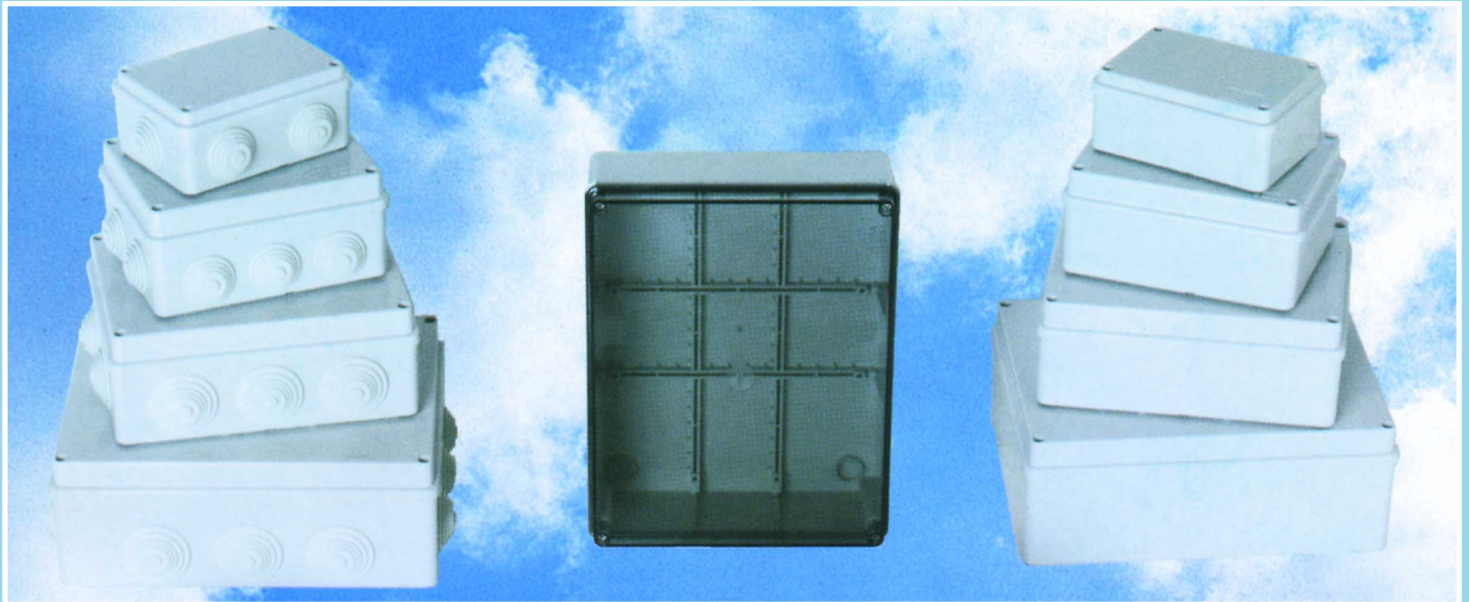

**PLASTIC BOXES
WIRE DUCTS
DIN RAILS
CABLE TIES**

TECNOMATIC CORP.


130 LENOX AVE. UNIT 6 STAMFORD CT 06906 - PHONE 203-359-9036 - FAX 203-9679026
www.tecnomatic.com

PLASTIC BOXES g



PLASTIC BOX WITH SNAP-ON COVER


Item	Internal Dimensions mm (in)	Pcs/Carton
400 C1	∅ 65 x 35 (2.56 x 1.38)	120
400 C2	∅ 80 x 40 (3.15 x 1.57)	150
400 C3	80 x 80 x 40 (3.15 x 3.15 x 1.57)	160

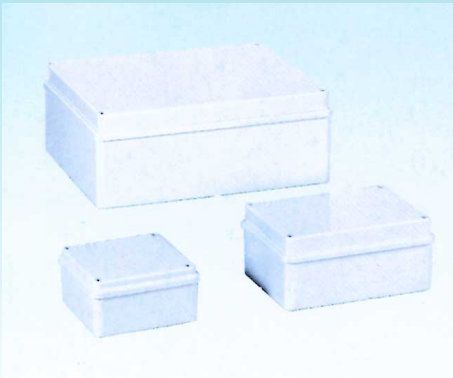

PLASTIC BOX WITH SCREW-ON COVER

Item	Internal Dimensions mm (in)	Pcs/Carton
410 C4	100 x 100 x 50 (3.94 x 3.94 x 1.97)	100
410 C4R	120 x 80 x 50 (4.7 x 3.1 x 1.97)	100
410 C5	150 x 110 x 70 (5.91 x 4.33 x 2.75)	42
410 C6	190 x 140 x 70 (7.48 x 5.51 x 2.75)	24
410 C7	240 x 190 x 90 (9.45 x 7.48 x 3.54)	16
410 C8*	300 x 220 x 120 (11.81 x 8.66 x 4.72)	6
410 C9*	380 x 300 x 120 (14.96 x 11.81 x 4.72)	5


* With hinged cover

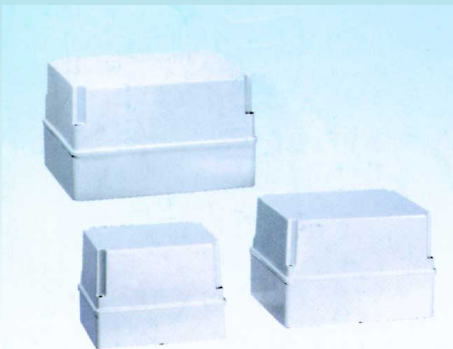

PLASTIC BOX WITH RAISED COVER

Item	Internal Dimensions mm (in)	Pcs/Carton
430 C5	150 x 110 x 140 (5.91 x 4.33 x 5.51)	18
430 C6	190 x 140 x 140 (7.48 x 5.51 x 5.51)	16
430 C7	240 x 190 x 160 (9.45 x 7.48 x 6.30)	8
430 C8*	300 x 220 x 180 (11.81 x 8.66 x 7.09)	4


* With hinged cover

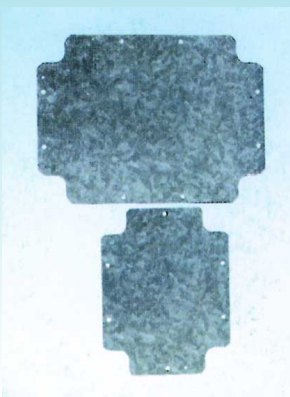

MOUNTING PLATE

Item	Dimensions mm (in)	Pcs/Carton
450 P6	190 x 110 (7.48 x 4.33)	30
450 P7	240 x 190 (9.45 x 7.48)	30
450 P8	300 x 220 (11.81 x 8.66)	20
450 P9	380 x 300 (14.96 x 11.81)	10


PLASTIC BOXES g

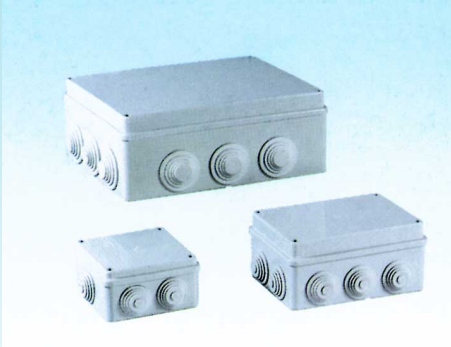

PLASTIC BOX WITH STEPPED GLANDS

Item	Internal Dimensions mm (in)	Pcs/Carton
400 C4	100 x 100 x 50 (3.94 x 3.94 x 1.97)	90
400 C4R	120 x 80 x 50 (4.7 x 3.1 x 1.97)	90
400 C5	150 x 110 x 70 (5.91 x 4.33 x 2.75)	45
400 C6	190 x 140 x 70 (7.48 x 5.51 x 2.75)	25
400 C7	240 x 190 x 90 (9.45 x 7.48 x 3.54)	14
400 C8*	300 x 220 x 120 (11.81 x 8.66 x 4.72)	6
400 C9*	380 x 300 x 120 (14.96 x 11.81 x 4.72)	5


* With hinged cover

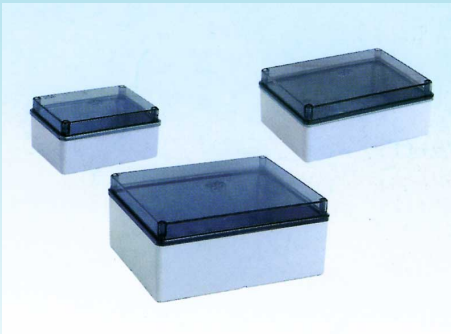

PLASTIC BOX WITH TRANSPARENT COVER

Item	Internal Dimensions mm (in)	Pcs/Carton
420 C5	150 x 110 x 70 (5.91 x 4.33 x 2.75)	42
420 C6	190 x 140 x 70 (7.48 x 5.51 x 2.75)	24
420 C7	240 x 190 x 90 (9.45 x 7.48 x 3.54)	16
420 C8*	300 x 220 x 120 (11.81 x 8.66 x 4.72)	6
420 C9*	380 x 300 x 120 (14.96 x 11.81 x 4.72)	5

* With hinged cover

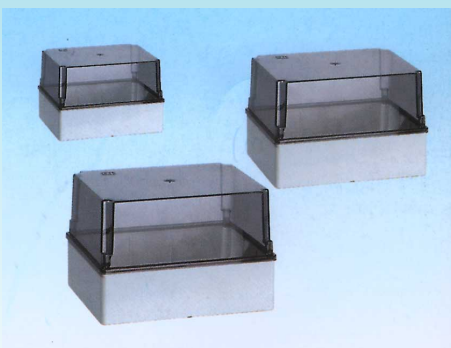


PLASTIC BOX WITH RAISED TRANSPARENT COVER

Item	Internal Dimensions mm (in)	Pcs/Carton
440 C5	150 x 110 x 140 (5.91 x 4.33 x 5.51)	18
440 C6	190 x 140 x 140 (7.48 x 5.51 x 5.51)	16
440 C7	240 x 190 x 160 (9.45 x 7.48 x 6.30)	8
440 C8*	300 x 220 x 180 (11.81 x 8.66 x 7.09)	4

* With hinged cover

WIRE DUCTS 8/12 mm SPACING

C.E.I. 23 - 22 Standards

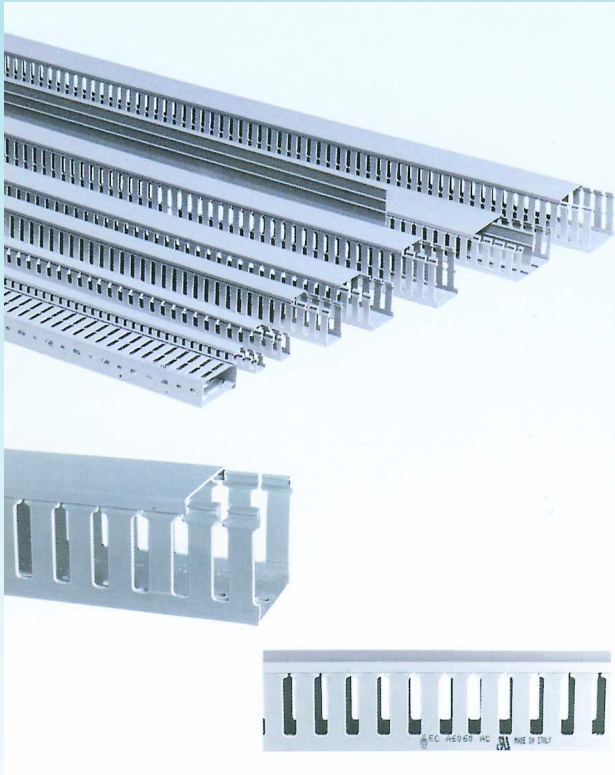

Item	Width mm (in)	Height mm (in)	Mtrs/feet per box
A 2525	25 (0.98)	25 (0.98)	100/328
A 2540	25 (0.98)	40 (1.57)	100/328
A 2560	25 (0.98)	60 (2.36)	70/230
A 2580	25 (0.98)	80 (3.35)	56/184
A 4025	40 (1.57)	25 (0.98)	80/262
A 4040	40 (1.57)	40 (1.57)	70/230
A 4060	40 (1.57)	60 (2.36)	56/184
A 4080	40 (1.57)	80 (3.35)	40/131
A 40100	40 (1.57)	100 (3.94)	32/105
A 6040	60 (2.36)	40 (1.57)	50/164
A 6060	60 (2.36)	60 (2.36)	32/105
A 6080	60 (2.36)	80 (3.35)	36/118
A 60100	60 (2.36)	100 (3.94)	24/79
A 8040*	80 (3.35)	40 (1.57)	40/131
A 8060*	80 (3.35)	60 (2.36)	28/92
A 8080	80 (3.35)	80 (3.35)	30/98
A 80100	80 (3.35)	100 (3.94)	24/79
A 10040*	100 (3.94)	40 (1.57)	28/92
A 10060*	100 (3.94)	60 (2.36)	20/66
A 10080*	100 (3.94)	80 (3.35)	24/79
A 100100	100 (3.94)	100 (3.94)	16/52
A 12040*	120 (4.72)	40 (1.57)	24/79
A 12060*	120 (4.72)	60 (2.36)	20/66
A 12080*	120 (4.72)	80 (3.35)	16/52
SES G	separation	separation	50/164

Available in gray and white color

* With separation




SPIRAL WRAP IN TRASPARENT POLYTHENE

Item	mm ø int./ext.	mt. per bundle	mt. per carton
P 03	3/5	25	500
P 04	4/6	25	500
P 06	6/8	25	300
P 08	8/10	25	400
P 10	10/12	25	200
P 12	12/14	20	160
P 14	14/16	20	160

Black or trasparente upon request

WIRE DUCTS 4/6 mm SPACING

C.E.I. 23 - 22 Standards

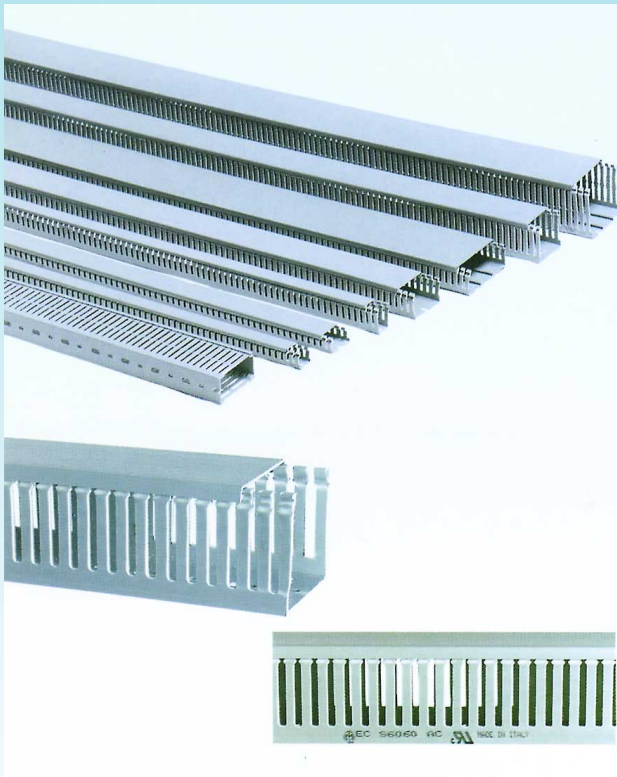


Item	Width mm (in)	Height mm (in)	Mtrs/feet per box
S 2525	25 (0.98)	25 (0.98)	100/328
S 2540	25 (0.98)	40 (1.57)	100/328
S 2560	25 (0.98)	60 (2.36)	70/230
S 2580	25 (0.98)	80 (3.35)	56/184
S 4025	40 (1.57)	25 (0.98)	80/262
S 4040	40 (1.57)	40 (1.57)	70/230
S 4060	40 (1.57)	60 (2.36)	56/184
S 4080	40 (1.57)	80 (3.35)	40/131
S 40100	40 (1.57)	100 (3.94)	32/105
S 6040	60 (2.36)	40 (1.57)	50/164
S 6060	60 (2.36)	60 (2.36)	32/105
S 6080	60 (2.36)	80 (3.35)	36/118
S 60100	60 (2.36)	100 (3.94)	24/79
S 8040*	80 (3.35)	40 (1.57)	40/131
S 8060*	80 (3.35)	60 (2.36)	28/92
S 8080	80 (3.35)	80 (3.35)	30/98
S 80100	80 (3.35)	100 (3.94)	24/79
S 10040*	100 (3.94)	40 (1.57)	28/92
S 10060*	100 (3.94)	60 (2.36)	20/66
S 10080*	100 (3.94)	80 (3.35)	24/79
S 100100	100 (3.94)	100 (3.94)	16/52
S 12040*	120 (4.72)	40 (1.57)	24/79
S 12060*	120 (4.72)	60 (2.36)	20/66
S 12080*	120 (4.72)	80 (3.35)	16/52
SES G	separation	separation	50/164


Available in gray and white color

* With separation

BOTTOM HOLES DIMENSIONS (mm)

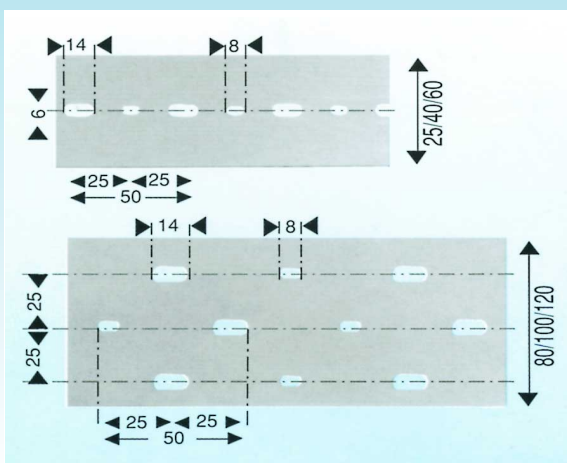

DIMENSIONS (mm)

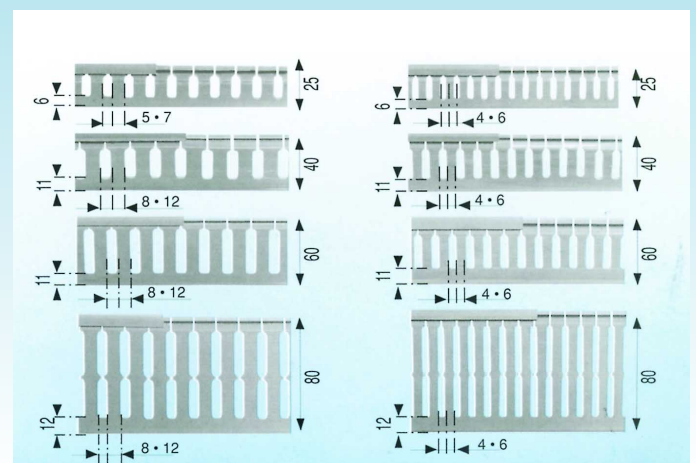

DIN RAILS

Mounting rails made in accordance to DIN 46277, CENELEC EN 50.022/50.035 standards. Each bar: 2 mt (6'6 3/4")

CABLE TIES

Our line of cable ties in UL certified, file E. 160935 and manufactured according to ISO 9002 standards.
Standard colour: nylon 6.6 clear. Other colour available upon request. Cable bases: 3M adhesive only.

Colour available upon request: black, brown, yellow, gray, green, red, light blue, orange, pink.

DESCRIPTION

PART. NO.	DIMENSIONS Lenght x Width		MAX. BUNDLE		TENSILE STRENGTH		PCS/BAG	PCS/CARTON
	Inch.	m/m	Inch.	m/m	Lbs	N		
SEL 2.301	3 x 0,1	75 x 2,5	5/8"	16	20	90	1000	60.000
SEL 2.302	4 x 0,1	100 x 2,5	1"	24	20	90	1000	50.000
SEL 2.303	5,4 x 0,1	135 x 2,5	1 3/8"	35	20	90	1000	40.000
SEL 2.304	6,4 x 0,1	160 x 2,5	1 3/4"	40	20	90	1000	40.000
SEL 2.305	8 x 0,1	200 x 2,5	2 1/4"	55	20	90	1000	30.000
SEL 2.310	5,6 x 0,14	140 x 3,5	1 3/8"	36	33	150	1000	30.000
SEL 2.311	8 x 0,14	200 x 3,5	2 1/4"	55	33	150	1000	20.000
SEL 2.312	11 x 0,14	280 x 3,5	3 1/4"	80	33	160	100	13.000
SEL 2.314	14,5 x 0,14	360 x 3,5	4 1/4"	107	33	150	100	8.000
SEL 2.320	5,6 x 0,18	140 x 4,5	1 3/8"	35	62	280	1000	20.000
SEL 2.321	6,4 x 0,18	160 x 4,5	1 1/2"	40	62	280	1000	20.000
SEL 2.322	7,2 x 0,18	180 x 4,5	1 3/4"	45	62	280	1000	15.000
SEL 2.323	8 x 0,18	200 x 4,5	2"	51	62	280	100	10.000
SEL 2.224	10 x 0,18	250 x 4,5	3"	73	62	280	100	10.000
SEL 2.425	11 x 0,18	280 x 4,5	3"	76	62	280	100	10.000
SEL 2.426	14,5 x 0,18	360 x 4,5	4"	101	62	280	100	8.000
SEL 2.427	15 x 0,18	380 x 4,5	4 3/8"	110	62	280	100	7.000
SEL 2.428	17 x 0,18	430 x 4,5	5"	130	62	280	100	5.000
SEL 2.430	7 x 0,3	180 x 7,5	2"	50	135	600	100	5.000
SEL 2.432	8 x 0,3	200 x 7,5	2"	52	135	600	100	5.000
SEL 2.431	10 x 0,3	240 x 7,5	2 3/4"	69	135	600	100	4.000
SEL 2.433	11 x 0,3	280 x 7,5	3"	76	135	600	100	4.000
SEL 2.434	14,5 x 0,3	360 x 7,5	4"	10	135	600	100	3.000
SEL 2.435	18 x 0,3	450 x 7,5	5 3/8"	136	135	600	100	2.500
SEL 2.436	20 x 0,3	500 x 7,5	6"	145	135	600	100	2.500
SEL 2.437	21,5 x 0,3	540 x 7,5	6 1/2"	164	135	600	100	2.500
SEL 2.441	30 x 0,3	750 x 7,5	9"	220	135	600	100	1.500
SEL 2.442	22 x 0,36	550 x 9	6 1/2"	165	180	800	50	2.000
SEL 2.443	31 x 0,36	780 x 9	9 3/8"	235	180	800	50	1.000
SEL 2.450	10 x 0,5	250 x 12,5	2 3/8"	60	248	1100	50	2.000
SEL 2.451	20 x 0,5	500 x 12,5	6"	145	248	1100	50	1.000
SEL 2.452	30 x 0,5	750 x 12,5	8 3/4"	215	248	1100	50	1.000
SEL 2.453	40 x 0,5	1000 x 12,5	12"	305	248	1100	50	1.000
BAS 2507 BASE square 3/4"							100	20.000
BAS 2508 BASE square 1"							100	10.000

PLASTIC BOXES


TECHNICAL SPECIFICATIONS:

Material:	Insulating Thermo-Plastic, with rust and corrosion proof screws
Colour:	Ral 7035, grey
Resistance:	Impact resistant up to 6J
Temperature:	Dimensional stability between -5° to +60°C
Ratings:	IP 56, NEMA 4

WIRE DUCTS

TECHNICAL SPECIFICATIONS:

Material:	self-extinguishing PVC grade V0 to UL 94
Resistance to flame and abnormally high temperature	up to 960°C (glow wire test).
Shock resistance	2J
Maximum temperature for continuous use	60°C
Manufactured to C.E.I. 23 - 22 standards	
Standard unit length	2 m
Standard colour	Ral 7030 grey; other colours on request
Approved by I.M.Q.	ref. EA850
Approved by U.L.	ref. 169019



TECNOMATIC CORP.

130 LENOX AVE. UNIT 6 STAMFORD CT 06906 - PHONE 203-359-9036 - FAX 203-9679026
www.tecnomatic.com