


Industrial Ethernet Switches

Solutions at the Heart of the Industrial ETHERNET



Contents

Industrial Unmanaged Switches	3
Unmanaged Power over ETHERNET (PoE+)	4
Industrial Unmanaged Switches	5
Lean Managed Switches	6
MACsec Managed Switches	8
Industrial Managed PROFINET Switches	10
Industrial Managed Switches	12
Function Overview of the	
Industrial Managed Switch	13
 Availability 	14
Security	15
 Data Transmission 	16
 Performance 	17
 Administration and Diagnostics 	18
Quick Reference Guide	19
RJ45 Connectors	20
RJ45 Interface Modules	21
SFP Modules	22
RJ45 Cords	23
WAGO Protect	24
Bulkhead Sockets	25
Wireless ETHERNET Gateway	26
Power Supplies	28
DC/DC Converters	29
Switches Selection Guide	30

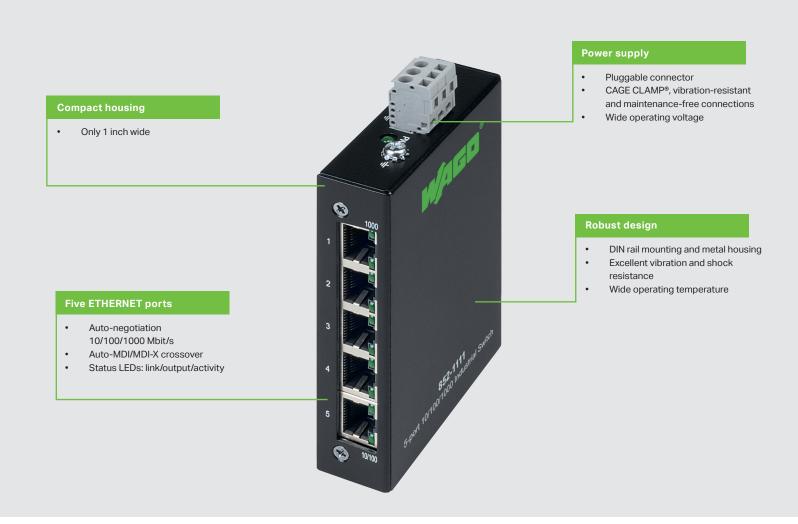


Industrial Unmanaged Switches


Eco - Economical and Compact

Unmanaged	Fast ETHERNET			Gigabit	
	WELLEL)	A. S.	THE WALLS	"TITIES"	₩ -
Ports	5 x 10/100	8 x 10/100	8 x 10/100	5 x 10/100/1000	8 x 10/100/1000
Power Supply	18 30 VDC	18 30 VDC	12 48 VDC	9 48 VDC	9 57 VDC
Dimensions (W x H x D)	23.4 x 109.2 x 73.8 mm 0.92 x 4.3 x 2.9 in	109.2 x 73.8 x 23.4 mm 4.3 x 2.9 x 0.92 in	46 x 116 x 99.6mm 1.8 x 4.6 x 3.9 in	23.4 x 109.2 x 73.8 mm 0.92 x 4.3 x 2.9 in	46 x 116 x 99.6 mm 1.8 x 4.6 x 3.9 in
Temperature	-40 +70 °C -40 +158 °F	-40 +70 °C -40 +158 °F	-40 +70 °C -40 +158 °F	-40 +70 °C -40 +158 °F	0 +60 °C +32 +140 °F
Approvals	cULus, DNV ¹	cULus	cULus	cULus, DNV 1	cULus
PROFINET	-	-	CC-A	CC-A	CC-A
Part Number	852-111	852-112	852-112/000-001	852-1111	852-1112

¹ With DIN 852-9101 rail adapter

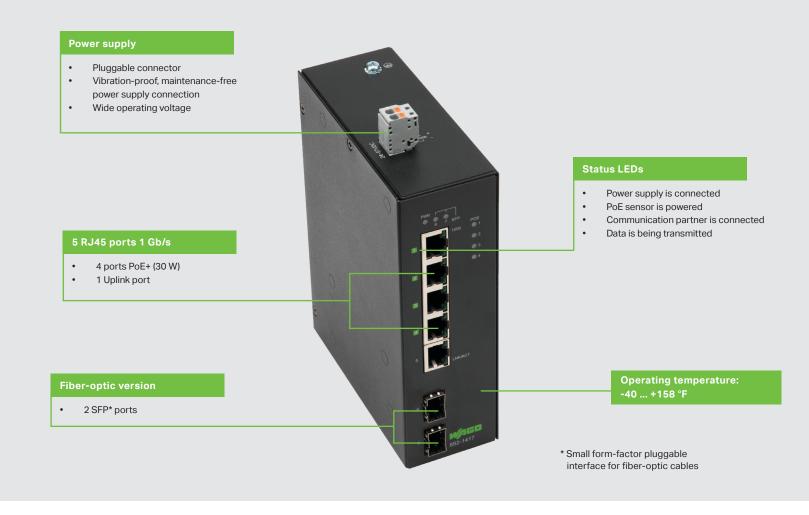

Unmanaged Power over ETHERNET (PoE+)

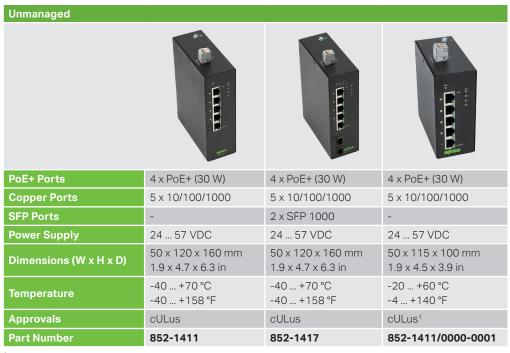

¹ For supply voltage <48 VDC, the PoE budget is limited to 60 watts

"Power over ETHERNET" (PoE+) technology powers PoE-capable devices via network cable using a switch. This allows devices like PoE-capable IP cameras or IoT sensors to be economically integrated into the network, eliminating the separate installation of power and data cables. Other advantages include diagnostics performed within the system.

The IEEE 802.3at-2009 PoE standard, which is also known as PoE+ or PoE plus standard, provides up to 25.5 W of power to the PoE-capable devices. To make this possible, the PoE-capable switch can provide up to 30 W per PoE-enabled port.



Power supply

- Redundant power supply terminals
- Wide voltage range
- Pluggable connector

Robust design

- DIN rail mounting and metal housing
- Excellent vibration and shock resistance
- Temperature range: -40 ... +158 °F

Alarm contact

- Monitor power supplies
- ETHERNET port monitoring
- Signaling via PLC or remote I/O
- Indicator LEDs on front panel of cabinet




Configuration via DIP switches

Industrial Unmanaged Switches

Standard - Versatile Use

Unmanaged	Fast ETHERNET			Gigabit	
		Tet Co			
Copper Ports	5 x 10/100	8 x 10/100	8 x 10/100	8 x 10/100/1000	16 x 10/100/1000
Fiber-Optic Ports	-		2 x SFP 100*	-	-
Power Supply	9 48 VDC	9 48 VDC	9 48 VDC	9 57 VDC	9 57 VDC
Redundant Power Supply	Yes	Yes	Yes	Yes	Yes
Alarm Contact	Yes	Yes	Yes	Yes	Yes
Dimensions (W x H x D)	50 x 120 x 105 mm 2 x 4.7 x 4.1 in	50 x 162 x 105 mm 2 x 6.4 x 4.1 in	50 x 162 x 105 mm 2 x 6.4 x 4.1 in	50 x 120 x 105 mm 2 x 4.7 x 4.1 in	50 x 162 x 105 mm 2 x 6.4 x 4.1 in
Temperature	-40 +70 °C -40 +158 °F	-10 +70 °C 14 +158 °F			
Approvals	cULus	cULus	cULus	cULus	cULus
PROFINET	-	-	-	CC-A ¹	CC-A ¹
Part Number	852-101	852-102	852-103	852-1102	852-1106/010-000

¹ No PROFINET configuration and diagnostics with conformity class A

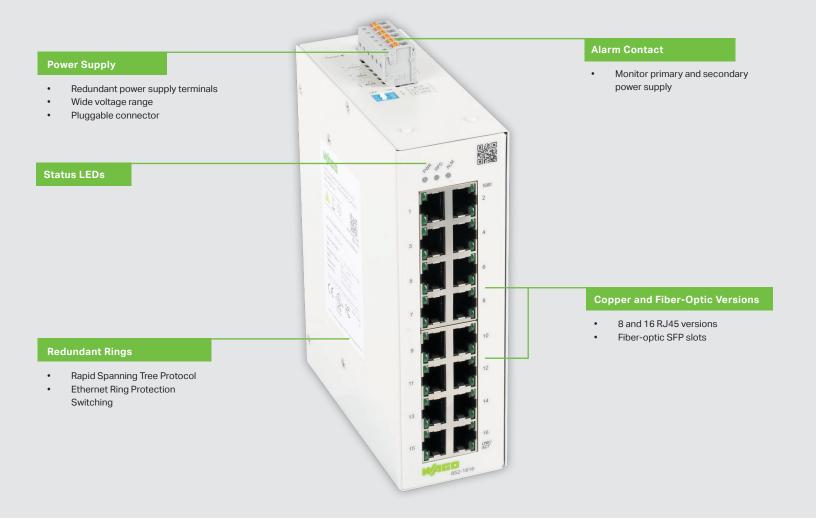


Lean Managed Switches

Economical Managed Switches Optimized for Industrial Networking

Lean Managed				
Copper Ports	8 x 10/100/1000	8 x 10/100/1000	8 x 10/100/1000	16 x 10/100/1000
PoE+ Ports	-	-	8 (up to 240 W)	-
SFP Ports	-	2 x 100 or 1000	2 x 100 or 1000	-
Redundant Power Supply	Yes	Yes	Yes	Yes
Power Supply	24 28 VDC	24 48 VDC	24 57 VDC	12 60 VDC
Alarm Contact	Yes	Yes	Yes	Yes
Dimensions (W x H x D)	50 x 116 x 100 mm 2 x 4.5 x 3.9 in	50 x 116 x 100 mm 2 x 4.5 x 3.9 in	50 x 120 x 160 mm 2 x 4.7 x 6.3 in	50 x 120 x 160 mm 2 x 4.7 x 6.3 in
Temperature	-10 +60 °C 14 +140 °F	-10 +60 °C 14 +140 °F	-10 +60 °C 14 +140 °F	-40 +60 °C -40 +140 °F
Approvals	CE, cULus	CE, cULus	CE, cULus	CE, cULus
Topology Map/Dashboard	Yes	Yes	Yes	Yes
Part Number	852-1812/010-000	852-1813/010-000	852-1813/010-000	852-1816


Lean Managed Switches

Lean Managed Switches are engineered for use in industrial environments that are installed and maintained by control minded Automation Engineers and Technicians. Unique tools such as a graphical active topology map and diagnostic dashboards provide users information to easily monitor and troubleshoot any industrial network. WAGO's Lean Managed Switches offer network tools that Control Engineers need without the overhead of IT related features that are commonly not used on the plant floor.

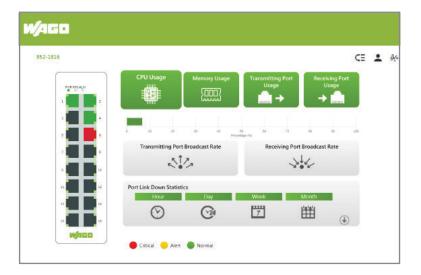

Web-based Dashboard Network Health at a Glance


- Red, yellow and green indicators for instant network health status
- Port link status for all used ports
- Transmission TX and RX usage
- Port broadcast rates

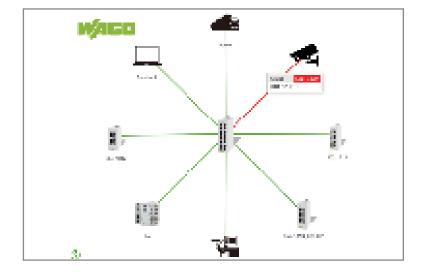

Web-based Topology Map

Network Status View

- Network connectivity information
- Connection status via green/red visualization
- Link information

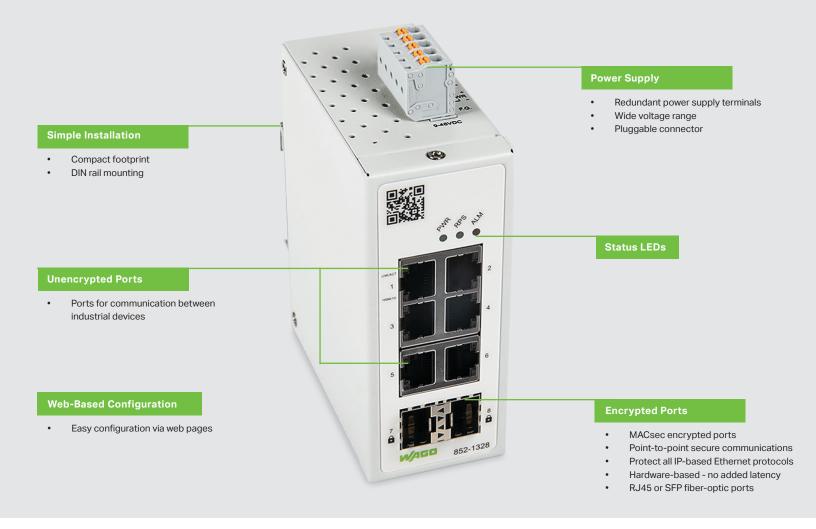

MACsec Encrypted Managed Switches

Encrypt Fieldbus Networks for Enhanced Cybersecurity




Help increase cybersecurity on the plant floor using easy to implement Media Access Control Security or MACsec technology. (IEEE 802.1AE)

Whether for new applications or retrofitting, MACsec managed switches will encrypt fieldbus such as MODBUS. Ethernet/IP, BACnet, and Profinet or IIoT protocols including HTTP, or MQTT. Install communication encryption without modifying your applications.

MACsec Data Encryption


MACsec Encryption


- IEEE 802.1 AE standard
- Encrypt IP-based protocols such as HTTP, MQTT, MODBUS TCP, BACnet, PROFINET, or EtherNet/IP
- No latency encryption hadware based
- Secure against multiple threats:
 - Man-in-the-middle
 - Masquerading
 - Passive wiretapping
 - Playback attacks

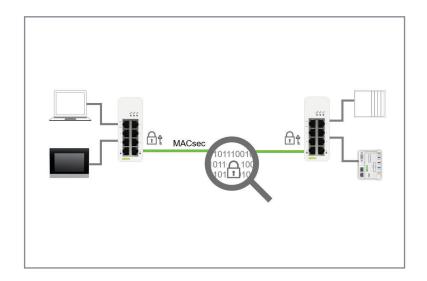

Green or Brown Field

- Easy to retrofit in a network use existing Ethernet cables
- Use within a plant for horizontal security
- Use between manufacturing buildings
- Space-saving control cabinet installation

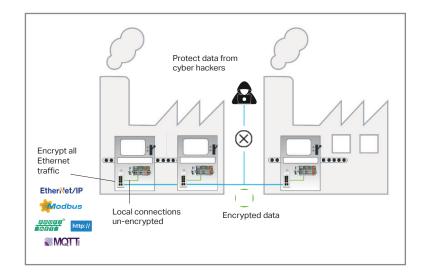

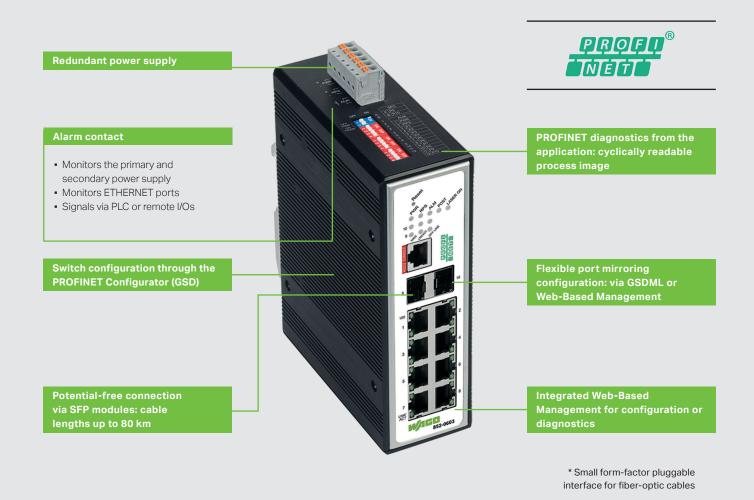


Industrial Managed PROFINET Switches

Performance, Availability, Data Transmission & Security

Managed			
Copper ports	8 x 10/100BASE-TX	8 x 10/100BASE-TX	8 x 10/100/1000BASE-T
SFP ports		2 x SFP 100/1000 ²	4 x SFP 1000BASE-SX/LX
Supply voltage	12 60 VDC	12 60 VDC	12 60 VDC
Redundant power supply	Yes	Yes	Yes
Alarm contact	Yes	Yes	Yes
Dimensions (W x H x D)	50 x 162 x 122 mm 2 x 6.4 x 4.8 in	50 x 162 x 122 mm 2 x 6.4 x 4.8 in	50 x 162 x 122 mm 2 x 6.4 x 4.8 in
Surrounding air temperature (operation)	−40 +70 °C −40 +158 °F	−40 70 °C -40 +158 °F	-40 70 °C -40 +158 °F
Approvals	cULus	cULus	cULus
PROFINET	CC-B	СС-В	СС-В
Item number	852-602	852-603	852-1605

Suitable SFP modules on page 17

PROFINET-Specific Features

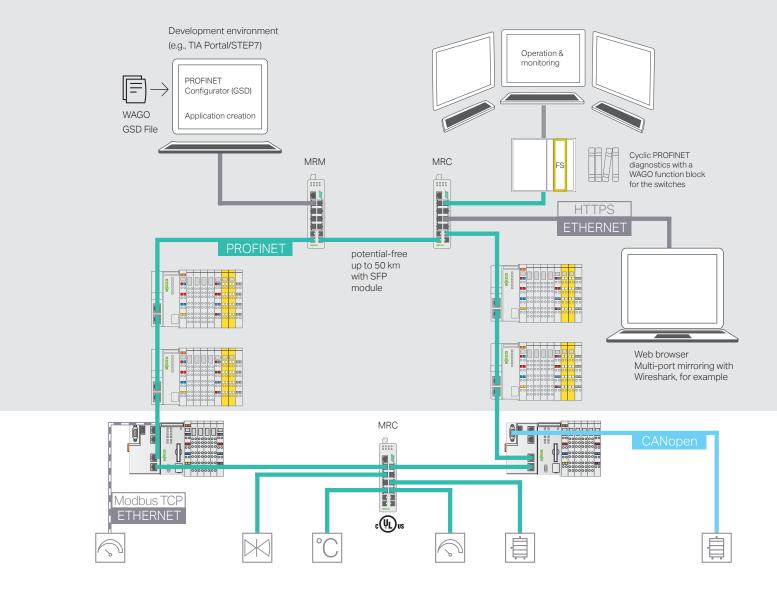


The following products meet the requirements of PROFINET conformity class A (CC-A): 852-1111, 852-1112, 852-1411, 852-1411/000-001 and 852-1417

Special Product Features:

- Prioritized PROFINET data packet forwarding
- Configuration via GSDML file not possible
- Neighborhood detection and PROFINET diagnostics not supported

Your Benefits:

- Use in industrial automation thanks to PROFINET certificate (conformity class B)
- Port-independent configuration of the media redundancy protocol as a manager (MRM) or client (MRC)
- Flexible multi-port mirroring configuration via device description file
- Switch configuration with device description file

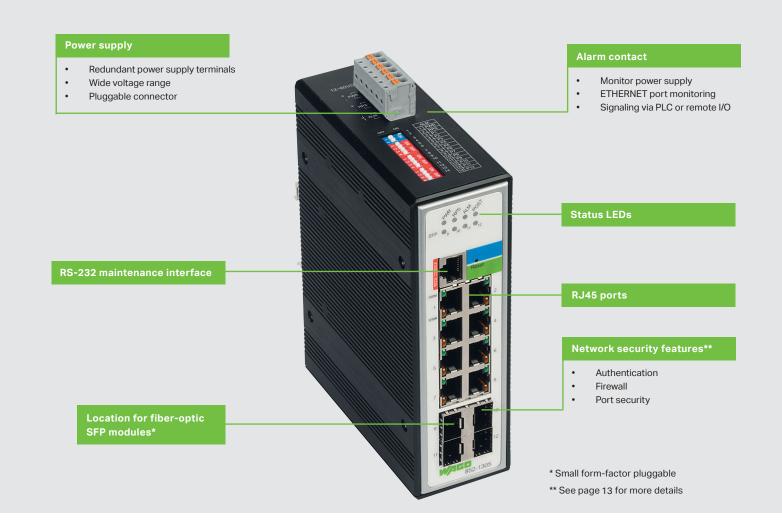

Industrial Managed ETHERNET Switches


Performance, Availability, Data Transmission & Security

Managed				PoE+
PoE+ Ports				8 x PoE+ (30 W)
Copper Ports	8 x 10/100	8 x 10/100/1000	8 x 10/100/1000	8 x 10/100/1000
Fiber-Optic Ports	2 x SFP 100/1000 ¹	4 x SFP 1000	4 x SFP 1000	4 x SFP 1000
Power Supply	12 60 VDC	12 60 VDC	12 48 VDC	24 57 VDC
Redundant Power Supply	Yes	Yes	Yes	Yes
Alarm Contact	Yes	Yes	Yes	Yes
Dimensions (W x H x D)	50 x 162 x 120 mm 2 x 6.4 x 4.7 in	50 x 162 x 120 mm 2 x 6.4 x 4.7 in	50 x 162 x 120 mm 2 x 6.4 x 4.7 in	50 x 162 x 120 mm 2 x 6.4 x 4.7 in
Temperature	-40 +70 °C -40 +158 °F			
Approvals	cULus, DNV	cULus, DNV	cULus, IEC 61850-3	cULus, IEC 61850-3
PROFINET	CC-A	CC-A		
Part Number	852-303	852-1305	852-1305/000-001	852-1505/000-001 ²

¹ Configurable via DIP switches (1000BASE-SX/LX or 100BASE-FX)

^{*} Suitable SFP modules on page 17

Function Overview of the Industrial Managed Switch

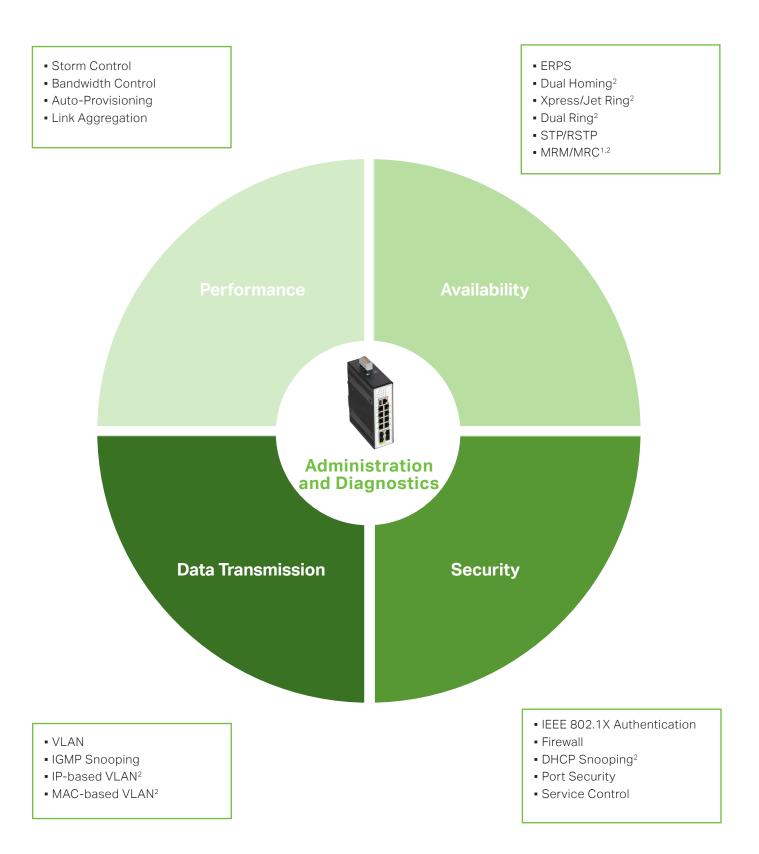


¹ Only available in 852-602, 852-603 and 852-1605.

² Not available in lean managed switches.

Availability

via Communication Redundancy




Jet Ring

Jet Ring¹

Fast, Easy Setup Ring Topology

- Typical switching time of 400 ms (depends on the application)
- Extremely easy configuration (on or off)
- Up to 20 switches in a Jet Ring
- WAGO ETHERNET devices (Fast Aging) can be used in the Jet Ring



Xpress Ring and Dual Ring


Xpress Ring¹

High Speed Reconfiguration

- Switching time < 20 ms
- Easy configuration (three parameters per switch)
- Up to 200 switches in one Xpress Ring
- Two Xpress Rings per switch

Dual Ring¹

- Combination of both redundancy types
- 1 Jet Ring and 1 Xpress Ring per switch or 2 Xpress Rings per switch



ERPS V2

ERPS: ETHERNET Ring Protection Switching

The Fast and Open Solution


- Standardized and open technology
- Switching time < 800 ms
- Nested topologies
- Realization of one-fault tolerance (SPOF – Single Point of Failure)

ERPS - Enhancement Mode¹

- WAGO devices with an integrated switch and Fast Aging configuration
- Typical switching time of 400 ms (depends on the application)

Security

Absolutely Secure Industrial Networks



IEEE 802.1X


IEEE 802.1X Authentication

The Security Standard for IT Networks

Secure authentication and authorization in ETHERNET networks (locally on the switch or via RADIUS server)

Process:

- Authentication of a subscriber is performed by the authenticator.
- The authenticator checks the authentication information of the subscriber (supplicant) with an authentication server.



Firewall - Access Control List

Authorization Only for the Required Services

Filtering data packets via:

- Source MAC or source IP address
- Destination MAC or destination IP address
- Range of MAC or IP addresses
- UDP/TCP source or destination ports

Firewall

MAC 1 MAC 4 MAC 3

Port Security


MAC Based Firewall

- Dynamically learns MAC addresses for each port
- Limitation of MAC addresses for each port
- MAC-based white/blacklist for each port

Ports

Data Transmission


Optimized ETHERNET Networks

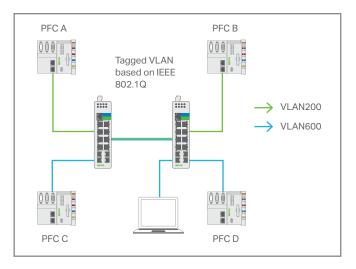

Logical Network Isolation

Enhance Network Security


- VLAN (e.g., per IEEE 802.1Q)
 Segmentation into logical, virtual networks:
- Broadcast limitation
- Security improvement
- Data flow prioritization
- Subdivision of machines and office networks

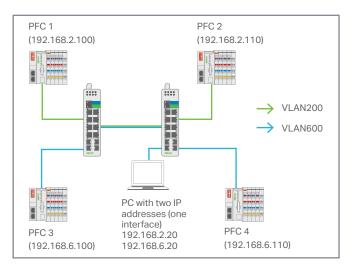

IP-Based VLAN¹

Secure by Known IP

- Routing of data packets between VLANs based on the IP address
- Communication from one participant in two or more VLANs
- Economical connection of networks to higher-level routers
- Prioritization of data packets based on the IP address

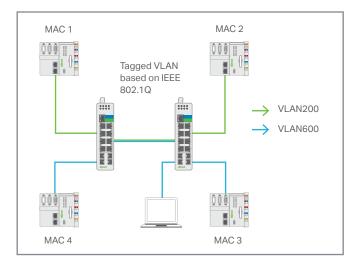


MAC-Based VLAN¹

Secure by Known Device

- Assignment of data packets to a VLAN based on the MAC address
- Prioritization of data packets based on the MAC address

Performance

Optimized ETHERNET Networks




Link Aggregation

Network Optimization

Logical Segmentation

- LACP link aggregation
 Merge multiple data connections into a single logical link:
- Increased transmission rate
- Link redundancy




Traffic Prioritization and Limitation

Controlled Bandwidth

- Faster transfer of important data packets through the switch
- Prioritization of data packets per IEEE 802.1 Q
- Limitation of the bandwidth or number of packets per unit of time per port
- Increase in data transmission quality

QoS



Mastering Data Traffic


High Availability

- Stopping broadcast storms
- Ensuring network availability
- Limiting broadcast and multicast data flows (packets/time)

Storm Control

Administration and Diagnostics

Simplified Commissioning and Maintenance




Configuration Interfaces

Configuration and Diagnostics

Several Options

- Configuration via Web-Based Management
- Configuration via command line
- Network management via SNMP v1, v2c, v3
- Support for MIB standards
 (Management Information Base)
- Diagnostics via Modbus TCP
 Comprehensive data available for easy diagnostics via Modbus®



DDM

10110 01001 Maintenance PC

Port Mirroring

DDM: Digital Diagnostic Monitoring¹

Simplify Maintenance and Troubleshooting

- Automatic detection of a connected SFP module
- Detailed module information
- Monitoring in real time
- Temperature
- Supply voltage
- Transmission power
- Reception power

Monitoring and Diagnostics

Simplified Maintenance

- Port mirroring:
- Mirrors the network traffic
- LLDP:

Automatically detects adjacent devices

Email notifications

Quick Reference Guide

Unmanaged

ECO

	Fast ETHERN	ET	GIGABIT		GIGABIT PoE+	
Ports	5 x 10/100	8 x 10/100	5 x 10/100/1000	8 x 10/100/1000	5 x 10/100/1000	5 x 10/100/1000
with PoE	-	-	-	-	4 x PoE+	4 x PoE+
Fiber-Optic Ports	-	-	-	-	-	2 x SFP 1000
Part Number	852-111	852-112 852-112/000-001	852-1111	852-1112	852-1411 852-1411/000-001	852-1417

Standard

	Fast ETHERNET			GIGABIT	
Ports	5 x 10/100	8 x 10/100	8 x 10/100	8 x 10/100/1000	16 x 10/100/1000
Fiber-Optic Ports	-	-	2 x SFP 100	-	-
Part Number	852-101	852-102	852-103	852-1102	852-1106/010-000

Managed

Lean

	GIGABIT	GIGABIT				
Ports	8 x 10/100/1000	8 x 10/100/1000	16 x 10/100/1000	8 x 10/100/1000		
with PoE+	-	-	-	8 x PoE+		
Fiber-Optic Ports	-	2 x SFP 1000	-	2 x SFP 100/1000		
Part Number	852-1812/010-111	852-1813/010-000	852-1816	852-1813/010-001		

Standard


	Fast ETHERNET	GIGABIT	GIGABIT PoE+
Ports	8 x 10/100	8 x 10100/1000	8 x 10/100/1000
with PoE+	-	-	8 x PoE+
Fiber-Optic Ports	2 x SFP 100/1000	4 x SFP 1000	4 x SFP 1000
Part Number	852-303	852-1305/000-001	852-1505/000-001

PROFINET

	PROFINET		
Ports	8 x 10/100	8 x 10100	8 x 10/100/1000
Fiber-Optic Ports	-	2 x SFP 100/1000	4 x SFP 1000
Part Number	852-602	852-603	852-1605

MACsec

	GIGABIT	
Ports	8 x 10/100/1000	6 x 10/100/1000
with MACsec	2 x RJ45	2 x SFP
Part Number	852-1322	852-1328

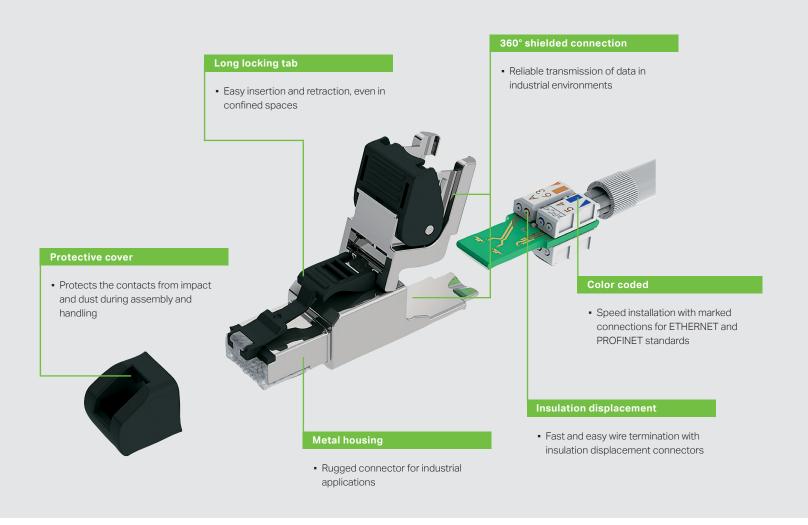

Cat 6A RJ45 Connectors

Fast and Tool-Free Installation



 $^{^{\}rm 1}$ Also available for conductors ranging from 24 AWG, Item No. 750-97x/000-02x

² Also available for ETHERNET T568A, Item No. 750-97x/000-011

³ Max. rate for PROFINET: 100 Mbit/s

Features

- Category 6
- PoE and PoE+ compatible



Simple handling without specialty tools

- Insulation displacement connectors
- Dual labeling: T568A and T568B



Shielded connection


· Safe transmission of data


DIN Rail Mount RJ45 Interfaces

ETHERNET Cabling on DIN Rail










Single and multimode

SFP Modules

Interfaces for Fiber-Optic

Category	Fast ETHERNET		Gigabit								
			Size in the state of the state								
	100BASE-FX	100BASE-FX	1000BASE-SX	1000BASE-LX	1000BASE-ZX						
Laser Type	Multimode	Single-mode	Multimode	Single-mode	Single-mode						
Wavelength	1310 nm	1310 nm	850 nm	1310 nm	1550 nm						
Max. Distance	2 km / 1.2 mi	30 km / 18.5 mi	0.55 km / 0.4 mi	10 km / 6.2 mi	80 km / 49.7 mi						
DDM*	No	No	Yes	Yes	Yes						
Connector	LC duplex	LC duplex	LC duplex	LC duplex	LC duplex						
Operating Temp.	-40 +70 °C -40 +70 °C		-40 +85 °C -40 +185 °F	-40 +85 °C -40 +185 °F	-40 +85 °C -40 +185 °F						
Part Number	852-201/107-002	852-201/107-030	852-1200	852-1210	852-1280						
Compatible with	852-103, 852-303 852-603, 852-1813, 852-1813/000-001 852-1328	852-103, 852-303 852-603, 852-1813, 852-1813/000-001 852-1328	852-303, 852-603 852-1305, 852-1505 852-1605, 852-1417 852-1305/000-001 852-1505/000-001 852-1328, 852-1813 852-1813/000-001	852-303, 852-603 852-1305- 852-1505 852-1605, 852-1417 852-1305/000-001 852-1505/000-001 852-1328, 852-1813 852-1813/000-001	852-303, 852-603 852-1305- 852-1505 852-1605, 852-1417 852-1305/000-001 852-1505/000-001 852-1328, 852-1813 852-1813/000-001						

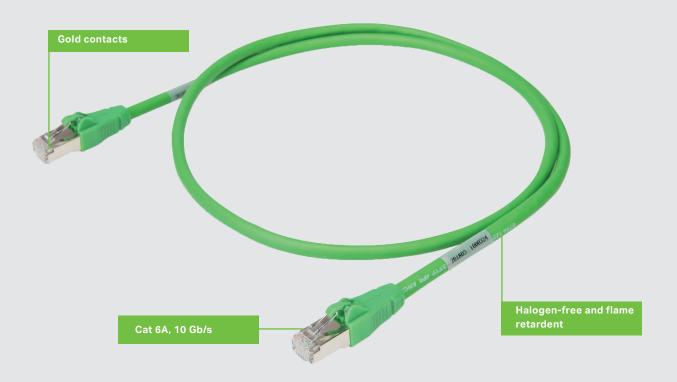

Patch Cables

Patch Cables	Standard	Axial Release
0.5 m / 1.6 ft	756-1250/1013-005	756-1250/1023-005
1 m / 3.3 ft	756-1250/1013-010	756-1250/1023-010
2 m / 6.6 ft	756-1250/1013-020	756-1250/1023-020
3 m / 9.8 ft	756-1250/1013-030	756-1250/1023-030
5 m / 16.4 ft	756-1250/1013-050	756-1250/1023-050
7.5 m / 24.6 ft	756-1250/1013-075	756-1250/1023-075
10 m / 32.8 ft	756-1250/1013-100	756-1250/1023-100

Features


- Cat 6A S/FTP
- Up to 10 Gb/s
- Gold contacts
- Mechanically and electrically tested
- Halogen free
- Flame retardent and low smoke emission
- > 1200 connections/deconnections



WAGO Protect

1 Gb/s PoE ETHERNET Surge Protection

ETHERNET Surge Devices	1 Gb/s PoE+	1 Gb/s PoE++
Max. PoE Power	51 Watts	100 Watts
Nominal Voltage	48 VDC	48 VDC
Max. PoE Current Per Pin	600 mA	1.5 A
Suitable for Non-PoE	Yes	Yes
Technology	Gas discharge tube	Hybrid gas discharge tube and silicon avalanche diode
Protection Modes	Line-to-ground, shield-to-ground	Line-to-line, line-to-ground, shield-to-ground
Pins Protected	[1, 2] [3, 6] [4, 5] [7, 8] {Shield}	[1, 2] [3, 6] [4, 5] [7, 8] {Shield}
Surge Suppression Line to Line	N/A	< 75 Vpk @ 100 A 8/20 μs
Max. Surge Current Line to Ground	1 kA (8/20 μs)	2 kA (8/20 μs)
Max. Surge Current Shield to Ground	20 kA (8/20 μs)	20 kA (8/20 μs)
Response Time	< 75 ns	< 5 ns
Connections	Inline RJ45 Cat 5 e shielded	Inline RJ45 Cat 5 e shielded
Operating and Storage Temp.	-40 +75 °C; -40 +167 °F	-40 +75 °C; -40 +167 °F
Relative Humidity	99% (non-condensing)	99% (non-condensing)
UL Certification	497B	497B
ETHERNET Protocol	IEEE 802.3	IEEE 802.3
Part Number	60366569	60366571

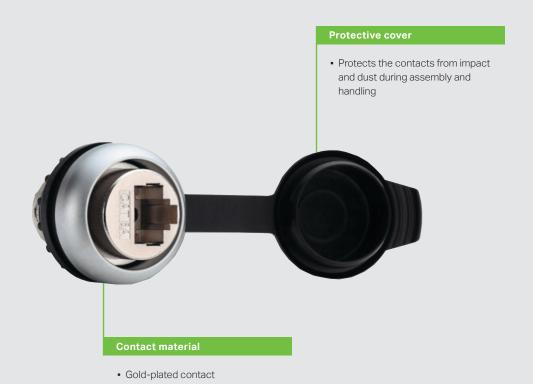

Bulkhead Sockets

Convenient Way to Pass RJ45 or USB Networks Through a Control Enclosure

Bulkhead Sockets		
Description	Cat 6A panel connector	USB 3.0 panel connector
Contact Material	CuSn, gold-plated	CuSn, gold-plated
Protection Class	IP65 and NEMA UL Type 2, 3R, 4, 4X, 12, 13 with cap closed	IP65 and NEMA UL Type 2, 3R, 4, 4X, 12, 13 with cap closed
Operating Temperature Range	-20 +70 °C -4 +158 °F	-20 +70 °C -4 +158 °F
Storage Temperature Range	-20 +80 °C -4 +176 °F	-25 +80 °C -13 +176 °F
Temperature Range Connector	-20 +70 °C	-
Transfer Rate	10 Gbit/s	5 Gbit/s
Category	Cat 6A	-
USB Standard	-	3.0
Approvals	cULus	cULus
Part Number	8000-099/0000-1764	8000-099/0000-1765




Wireless ETHERNET Gateway

Copper Cable Replacement



¹ Pending ² Antenna included


Application – Wireless ETHERNET Gateway

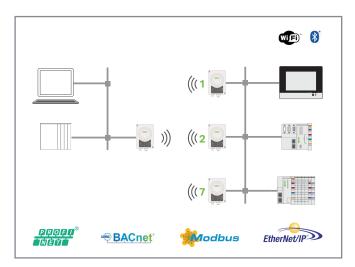

ETHERNET Bridge

Replacement of Network Cables


- Transmission of each TCP/IP also of prioritized PROFINET RT and ETHERNET/IP frames
- Pairing via device's push-button
- Up to seven clients
- Use of Wi-Fi or Bluetooth®

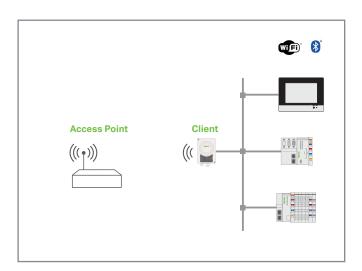

Client for Existing Access Point

Connect to Plant Networks

- Connection to a network of type Wi-Fi 802.11a/b/g/d/e/i/h
- Protocols like Modbus TCP, ETHERNET/IP, BACnet/IP ...
- Possibility of connecting multiple devices after the client

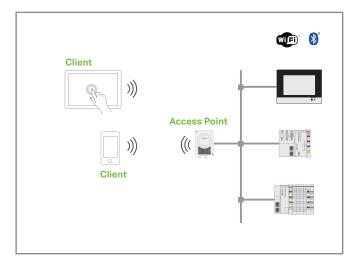

Access Point

Smart Devices for Operator Interface

- Setup of a Wi-Fi
 802.11a/b/g/d/e/i/h or Bluetooth® network
- Connection of tablets, smartphones etc.
- Up to seven clients simultaneously

Power supply Pro 2

- Up to 96% efficiency
- IloT-ready thanks to communication modules (IO-Link, Modbus RTU, Modbus TCP, ETHERNET)
- Versatile configuration options including software, e!COCKPIT function blocks and communication modules
- TopBoost capabilities of up to 600% of nominal output current
- PowerBoost capabilities of up to 150% of nominal output current for 5 s
- Extended temperature range: -40 ... +70 °C



Power supply Compact

- Compact, low-profile design
- Ideal for decentralized applications
- Surrounding air temperature (operation): -25...+60°C





Power supply Eco

- Budget-friendly for basic applications
- Flexible mounting of DIN-rail adapter
- Flexible installation via screw-mount clips



Power supply Classic


- Integrated TopBoost (787-16xx with ≥ 120 W)
- DC OK signal/contact
- Up to 93% efficiency
- Surrounding air temperature (operation): -25 ... +70 °C

Power Supplies

Power Supply	Pro 2		Classic							Eco			Compact				
								### ##################################	100 Aug. 101 Au	The state of the s							
Nominal output voltage [DC]	24 V	24 V	24 V	24 V	24 V	24 V	48 V	48 V	48 V	24 V	24 V	24 V	24 V	24 V	24 V	24 V	
Nominal output current [DC]	5 A	10 A	1 A	2 A	5 A	10 A	2 A	5 A	10 A	1.25 A	2.5 A	5 A	1.3 A	2.5 A	4 A	6 A	
Industrial Eco Switches (852-111, 852-112)	•					•		_	_		П		•				
Industrial Eco Switches (852-1111, 852-1112)	•	•			-	-	•		•				-	•	•		
Industrial Eco Switches (PoE) (852-1411, 852-1417)	•	•	-	-		•	-	•	П	-	-		-	-	-	-	
Industrial Switches (852-101, 852-102, 852-103/040-000, 852-1102, 852-1106)	•	•			-	-	•	•	•		-		-	•	•	•	
Industrial Managed Switches (852-303, 852-1305, 852-1305/000-001)	•	•	-		Ш	•				-	•	•	-				
Industrial Managed Switches (PoE) (852-1505)	-	-	-	_	_	-	_	-		-	-	_	-	-	-	-	
Industrial Managed Switches (PoE) (852-1505/000-001)	-	Ш	-	-	-		-		•	-	-	-	-	-	-	-	
PROFINET Managed Switches (852-602, 852-603, 852-1605)	•	•	-	•	••	•	•	•	•	-	•	•	-	•	•	•	
Power Supply Part Number	2787- 2144	2787- 2448	787- 1602	787- 1606	787- 1622	787- 1632	787- 1623	787- 1633	787- 1635	787- 1702	787- 1712	787- 1722	787- 1102	787- 1112	787- 1122	787- 1226	


Industry's most compact

- True 6 mm width maximizes panel space
- Depth of only 56 mm from top edge of DIN rail saves cabinet space



Monitoring & installation

- LED for voltage indication
- Easy commissioning with top entry terminations
- Push-in comb style jumper from the top



DC/DC Converters

DC/DC Converters		
	No. 12	
Nominal input voltage	12 VDC	12 VDC
Input voltage range	8 16 VDC	8 16 VDC
Nominal output voltage (SELV)	24 VDC	24 VDC
Output Current	3 A	250 mA
Efficiency	95%	83%
LED Indication	Green	Red (Vo)
Ambient Operating Temperature	-40 +70 °C -40 +158 °F	-25 +40 °C -13 +104 °F
Dimensions (mm) W x H x L	78 x 51 x 31	6 x 56 x 91
Approvals	-	CE
Line Regulation	0.05% max (8-16 VDC full load)	0.5% max (8-16 VDC full load)
Load Regulation	0.5% max (no load to full load)	0.5% max (no load to full load)
Item Number	8002-0099/0000-0057	859-804

Unmana	aged Industrial Switches												
	upported				Eco					S	tandaı	rd	
= 5	upported						_						
		852-111	852-112	852-1111	852-1112	852-1411	852-1411/000-001	852-1417	852-101	852-102	852-103/040-000	852-1102	852-1106
	Number of copper ports	5	8	5	8	5	5	5	5	8	8	8	16
	100 Mbit/s												
	1 Gbit/s	_	_						_	_	_		
Hardware	PoE+ ports among these (1 Gbit/s)	0	0	0	0	4	4	4	0	0	0	0	0
ardv	Number of SFP ports	0	0	0	0	0	0	2	0	0	2	0	0
至	100 Mbit/s	-	-	-	-	_	-	-	-	-		_	-
	1 Gbit/s	-	-	-	-	_	-		-	_	-	_	_
	Alarm relays	0	0	0	0	0	0	0	1	1	1	1	1
	CE												
als, ds, tes	DNV GL		-		-	_	-	-	-	-	-	_	-
Approvals, Standards, Certificates	UL 61010												
App Stan Serti	IEC 61850-3	-	-	-	-	-	-	-	-	-	-	-	_
7 00 0	PROFINET CC-B	_	_	_	_	_	_	_	_	_	_	_	_
	Status LEDs	_	_	_									
Hardware Features	Auto-negotiation												
ardv eatu	Auto-crossing												
五元	PROFINET CC-A	_	_						_	_	_		
	DIP switch (diagnostics)	-	-	-	-	_	-	-					
E	Web-Based Management (http, https)	-	-	-	-	_	-	-	-	_	-	_	_
Configuration	SNMP (MIB)	-	-	-	-	-	-	-	-	-	-	-	_
figu	CLI (SSH, Telnet)	_	-	-	-	_	-	-	_	_	-	_	_
Con	PROFINET Configurator (GSDML file)	-	-	-	-	_	-	-	-	-	-	_	-
	USB storage	-	-	-	-	-	-	-	-	-	-	-	_
	Status LED (LINK active)												
	Status LED (LINK down)	-	-	-	-	_	-	-					_
	Status LED (alarm)	-	-	-	-	_	-	-					
မွ	SNMP (MIB)	-	-	-	-	-	-	-	-	-	-	-	_
ostic	SNMP traps	-	-	-	-	_	-	-	-	-	-	_	-
Diagnostics	Modbus® register	-	-	-	-	-	-	-	_	_	-	-	-
ق	Web-Based Management (http, https)	-	-	-	-	-	-	-	-	-	-	-	-
	Dashboard & Topology Map	-	-	-	-	-	-	-	-	-	-	-	-
	PROFINET diagnostics	-	-	-	-	-	-	-	-	-	-	-	-
	Neighborhood detection (LLDP)	-	-	-	-	-	-	-	-	-	-	-	-
	Redundant power supply	-	-	-	-	_	-	-					
. >	Jet Ring	_	-	-	-	-	-	-	-	-	-	-	_
lanc	Xpress Ring	-	-	-	-	_	-	_	-	_	-	_	_
Redundancy	ETHERNET Ring Protection Switching	_	-	-	-	-	-	-	-	-	-	-	_
Rec	Media Redundancy Protocol (MRP) (client/manager)	_	_	_	_	_	_	_	_	_	_	_	_
	RSTP/STP	_	_	_	_		_		_	_			
	Segmentation (VLAN)												
<u>ī</u> ;	Authentication (IEEE 802.1X)										_		
Security	Access Control List (MAC, IP, Port)												
Se	Port Security		_	_			_			_			_
	LACP link aggregation												
sion	Prioritization (IEEE 802.1 p)		_	-									
miss	Quality of service (IEEE 802.1 Q)		_	_	_	_	_	_	-				
ans	Bandwidth limitation		_	_	_	_	_	_	_	_	_	_	_
Data Transmission and Performance	Storm detection											_	
Dat	Routing within VLANs		_	_	_		_	_	_	_	_	_	_

wanaye	ed Industrial Switches														
= s	upported		Le	an		MAC	Csec			Full			PI	ROFINI	ΕT
		852-1812	852-1813	852-1813/000-001	852-1816	852-1322	852-1382	852-303	852-1305	852-1305/000-001	852-1505	852-1505/000-001	852-602	852-603	852-1605
	Number of copper ports	8	8	8	16	8	6	8	8	8	8	8	8	8	8
	100 Mbit/s														
	1 Gbit/s							_					-	-	
vare	PoE+ ports among these (1 Gbit/s)	0	0	8	0	0	0	0	0	0	8	8	0	0	0
Hardware	Number of SFP ports	0	2	2	0	0	2	2	4	4	4	4	0	2	4
Ĭ	100 Mbit/s	-			-	-	-		-	-	-	-	-		-
	1 Gbit/s	-			-	-							_		
	Alarm relays	1	1	1	1	-	-	1	1	1	1	1	1	1	1
	CE														
Approvals, Standards, Certificates	DNV GL	-	-	-	-	-	-			-	-	-	-	-	-
rova Idar ifica	UL 61010										-				
App Star Sert	IEC 61850-3	-	-	-	-	-	-	-	-		-		-	-	-
, 0	PROFINET CC-B	-	-	-	-	-	-	-	-	-	-	-			
	Status LEDs														
Hardware Features	Auto-negotiation													8 - 0 2	
ardv eatu	Auto-crossing														
至正	PROFINET CC-A	_	_	_	_										
	DIP switch (diagnostics)					-	_							8	
E	Web-Based Management (http, https)														
Configuration	SNMP (MIB)														
figu	CLI (SSH, Telnet)					_	_								
Con	PROFINET Configurator (GSDML file)	_	_	_	_	_	_	_	_	_	_	_			
	USB storage	_	_	_	_	_	_	_	_		_		_	_	-
	Status LED (LINK active)														
	Status LED (LINK down)									-		-			
	Status LED (alarm)														
ų	SNMP (MIB)														
Diagnostics	SNMP traps														
guo	Modbus® register												-	-	-
Ö	Web-Based Management (http, https)														
	Dashboard & Topology Map					-	-	_	-	-	-	-	-	-	-
	PROFINET diagnostics	-	-	-	-	-	-	-	-	-	-	-			
	Neighborhood detection (LLDP)					-	-								
	Redundant power supply														
	Jet Ring	-	-	-	-	-	-						-	-	-
ancy	Xpress Ring	-	-	-	-	-	-						-	-	-
ğun	ETHERNET Ring Protection Switching	a	a	a	a	-	-						-	-	
Redundancy	Media Redundancy Protocol (MRP) (client/manager)	-	-	-	-	-	-	-	-	-	-	-	•	•	1
	RSTP/STP					_	_								
	Segmentation (VLAN)	b	b	b	b	_	_								
Security	Authentication (IEEE 802.1X)												-	-	
Sec	Access Control List (MAC, IP, Port)					_	-								
,	Port Security					_	_						_		
5 o	LACP link aggregation	-	-	-	-	-	-						-	-	
ssic	Prioritization (IEEE 802.1 p)														
orm	Quality of service (IEEE 802.1 Q)					-	-								
Data Transmission and Performance	Bandwidth limitation	-	-	-	-	-	-								
ata nd F	Storm detection					-	-								
O a	Routing within VLANs	_	_	_	-	-	-								

^a Supports two ERPS rings with a switching time of less than 800 ms

 $^{^{\}rm b}\, {\rm Supports}$ up to five VLANs

WAGO Corporation N120 W19129 Freistadt Road Germantown, Wisconsin 53022 Telephone: 800 / DIN-Rail (346-7245) Fax: 262 / 255-3232 info.us@wago.com www.wago.us WAGO Canada Inc. 1550 Yorkton Court, Unit 1 Burlington, ON

WAGO Canada Inc. 1550 Yorkton Court, Unit 1 Burlington, ON L7P 5B7 Telephone: 888 / WAGO 221 (924-6221) info.ca@wago.com www.wago.ca

WAGO SA DE CV Carretera estatal 431 Km. 2+200. Lote 99 6 Parque Industrial Tecnologico Innovacion Queretaro El Marques, Qro. 76246 Lada sin Costo: 01 800 288 WAGO (288-9246) Telefono: 422 / 221-5946 info.mx@wago.com www.wago.mx

WAGO is a registered trademark of WAGO Verwaltungsgesellschaft mbH.

"Copyright – WAGO Kontakttechnik GmbH & Co. KG – all rights reserved. The content and structure of the WAGO Websites, catalogs, videos, and other WAGO media are subject to copyright. The dissemination or changing of the content of these pages and videos is not permitted. Furthermore, the content may neither be copied nor made available to third parties for commercial purposes. Also subject to copyright are the images and videos that were made available to WAGO Kontakttechnik GmbH & Co. KG by third parties."